



百强减速机®
BAI QIANG REDUCER
品质铸就品牌

K系列斜齿轮-螺旋锥齿轮减速机

江苏百强减速机有限公司

Jiangsu Baiqiang Reducer Co., Ltd.

地址：江苏省梁溪区蔚蓝路97号

24小时服务热线：400-710-9918

技术服务热线：13861467735



扫一扫加微信


型号与标记:

Type Designations:

K F 37-Y 0.55-4P-24.99-M1-180°-A 减速机类型 ———— K 结构形式 ———— F 机座号 ———— 37 电机代号 ———— Y 电机功率、极数 ———— 0.55-4P 传动比 ———— 24.99 安装形式 ———— M1 电机接线盒位置 ———— 180° 输出轴或法兰方向 ———— A	K F 37-Y 0.55-4P-24.99-M1-180°-A Gear units type ———— K Structure ———— F Size ———— 37 Motor code ———— Y Motor power、pole ———— 0.55-4P Ratio ———— 24.99 Mounting position ———— M1 Position of the motor thermal box ———— 180° Position of output shaft or flange ———— A																																												
减速机类型: 斜齿—螺旋锥齿轮减速机	Gear units type: Helical-bevel gear units																																												
结构形式: <table border="0"> <tr><td>普通轴伸式 (省略)</td><td></td></tr> <tr><td>轴装式</td><td>A</td></tr> <tr><td>轴伸法兰式</td><td>F</td></tr> <tr><td>轴装法兰式</td><td>AF</td></tr> <tr><td>轴装小法兰式</td><td>AZ</td></tr> <tr><td>轴装底脚式</td><td>AB</td></tr> <tr><td>轴装带防转臂</td><td>AT</td></tr> <tr><td>普通轴伸式, 轴输入</td><td>S</td></tr> <tr><td>普通轴装式, 轴输入</td><td>AS</td></tr> <tr><td>轴伸法兰式, 轴输入</td><td>FS</td></tr> <tr><td>轴装法兰式, 轴输入</td><td>AFS</td></tr> </table>	普通轴伸式 (省略)		轴装式	A	轴伸法兰式	F	轴装法兰式	AF	轴装小法兰式	AZ	轴装底脚式	AB	轴装带防转臂	AT	普通轴伸式, 轴输入	S	普通轴装式, 轴输入	AS	轴伸法兰式, 轴输入	FS	轴装法兰式, 轴输入	AFS	Structure: <table border="0"> <tr><td>Foot-mounted solid shaft output</td><td>(-)</td></tr> <tr><td>Hollow shaft output</td><td>A</td></tr> <tr><td>Flange-mounted solid shaft output</td><td>F</td></tr> <tr><td>Flange-mounted hollow shaft output</td><td>AF</td></tr> <tr><td>Short-flange-mounted hollow shaft output</td><td>AZ</td></tr> <tr><td>Foot-mounted hollow shaft output</td><td>AB</td></tr> <tr><td>Torque-arm-mounted hollow shaft output</td><td>AT</td></tr> <tr><td>Foot-mounted solid shaft output, shaft input</td><td>S</td></tr> <tr><td>Hollow shaft output, shaft input</td><td>AS</td></tr> <tr><td>Flange-mounted solid shaft output, shaft input</td><td>FS</td></tr> <tr><td>Flange-mounted hollow shaft output, shaft input</td><td>AFS</td></tr> </table>	Foot-mounted solid shaft output	(-)	Hollow shaft output	A	Flange-mounted solid shaft output	F	Flange-mounted hollow shaft output	AF	Short-flange-mounted hollow shaft output	AZ	Foot-mounted hollow shaft output	AB	Torque-arm-mounted hollow shaft output	AT	Foot-mounted solid shaft output, shaft input	S	Hollow shaft output, shaft input	AS	Flange-mounted solid shaft output, shaft input	FS	Flange-mounted hollow shaft output, shaft input	AFS
普通轴伸式 (省略)																																													
轴装式	A																																												
轴伸法兰式	F																																												
轴装法兰式	AF																																												
轴装小法兰式	AZ																																												
轴装底脚式	AB																																												
轴装带防转臂	AT																																												
普通轴伸式, 轴输入	S																																												
普通轴装式, 轴输入	AS																																												
轴伸法兰式, 轴输入	FS																																												
轴装法兰式, 轴输入	AFS																																												
Foot-mounted solid shaft output	(-)																																												
Hollow shaft output	A																																												
Flange-mounted solid shaft output	F																																												
Flange-mounted hollow shaft output	AF																																												
Short-flange-mounted hollow shaft output	AZ																																												
Foot-mounted hollow shaft output	AB																																												
Torque-arm-mounted hollow shaft output	AT																																												
Foot-mounted solid shaft output, shaft input	S																																												
Hollow shaft output, shaft input	AS																																												
Flange-mounted solid shaft output, shaft input	FS																																												
Flange-mounted hollow shaft output, shaft input	AFS																																												
规格: (见选型参数表)	Size: (see selection table)																																												
电机代号: <table border="0"> <tr><td>普通 (更新)</td><td>Y(Y2)</td></tr> <tr><td>防 爆</td><td>B</td></tr> <tr><td>直 流</td><td>Z</td></tr> <tr><td>制 动</td><td>YEJ</td></tr> <tr><td>多 速</td><td>D</td></tr> <tr><td>变 频</td><td>YVP</td></tr> <tr><td>电磁调速</td><td>YCT</td></tr> <tr><td>冶金起重</td><td>R</td></tr> <tr><td>变频制动</td><td>YVPJ</td></tr> <tr><td>辊 道</td><td>G</td></tr> </table>	普通 (更新)	Y(Y2)	防 爆	B	直 流	Z	制 动	YEJ	多 速	D	变 频	YVP	电磁调速	YCT	冶金起重	R	变频制动	YVPJ	辊 道	G	Motor code: <table border="0"> <tr><td>Ordinary(renew)</td><td>Y(Y2)</td></tr> <tr><td>Flame-proof</td><td>B</td></tr> <tr><td>Direct current</td><td>Z</td></tr> <tr><td>Brake</td><td>YEJ</td></tr> <tr><td>Multi-speed</td><td>D</td></tr> <tr><td>Variable frequency</td><td>YVP</td></tr> <tr><td>Electromagnetism speed modulation</td><td>YCT</td></tr> <tr><td>Hoisting in metallurgy</td><td>R</td></tr> <tr><td>Variable frequency and brake</td><td>YVPJ</td></tr> <tr><td>Roller tables</td><td>G</td></tr> </table>	Ordinary(renew)	Y(Y2)	Flame-proof	B	Direct current	Z	Brake	YEJ	Multi-speed	D	Variable frequency	YVP	Electromagnetism speed modulation	YCT	Hoisting in metallurgy	R	Variable frequency and brake	YVPJ	Roller tables	G				
普通 (更新)	Y(Y2)																																												
防 爆	B																																												
直 流	Z																																												
制 动	YEJ																																												
多 速	D																																												
变 频	YVP																																												
电磁调速	YCT																																												
冶金起重	R																																												
变频制动	YVPJ																																												
辊 道	G																																												
Ordinary(renew)	Y(Y2)																																												
Flame-proof	B																																												
Direct current	Z																																												
Brake	YEJ																																												
Multi-speed	D																																												
Variable frequency	YVP																																												
Electromagnetism speed modulation	YCT																																												
Hoisting in metallurgy	R																																												
Variable frequency and brake	YVPJ																																												
Roller tables	G																																												
电机功率、极数: (见选型参数表)	Motor power、pole : (see selection table)																																												
传动比: (见选型参数表)	Ratio: (see selection table)																																												
安装形式: M1、M2、M3、M4、M5、M6 (见第89页)	Mounting position: M1、M2、M3、M4、M5、M6(see page 89)																																												
电机接线盒位置: 0°、90°、180°、270° (见第89页)	Position of the motor thermal box: 0°、90°、180°、270° (see page 89)																																												
输出轴或法兰方向: <table border="0"> <tr><td>从电机尾部看左边为</td><td>A</td></tr> <tr><td>从电机尾部看右边为</td><td>B</td></tr> <tr><td>从电机尾部看左右边为</td><td>A+B</td></tr> </table> (见安装形式)	从电机尾部看左边为	A	从电机尾部看右边为	B	从电机尾部看左右边为	A+B	Position of output shaft or flange: viewing on motor end:left side -A, right side-B,both sides-A+B(see mounting position)																																						
从电机尾部看左边为	A																																												
从电机尾部看右边为	B																																												
从电机尾部看左右边为	A+B																																												

安装形式


Mounting position

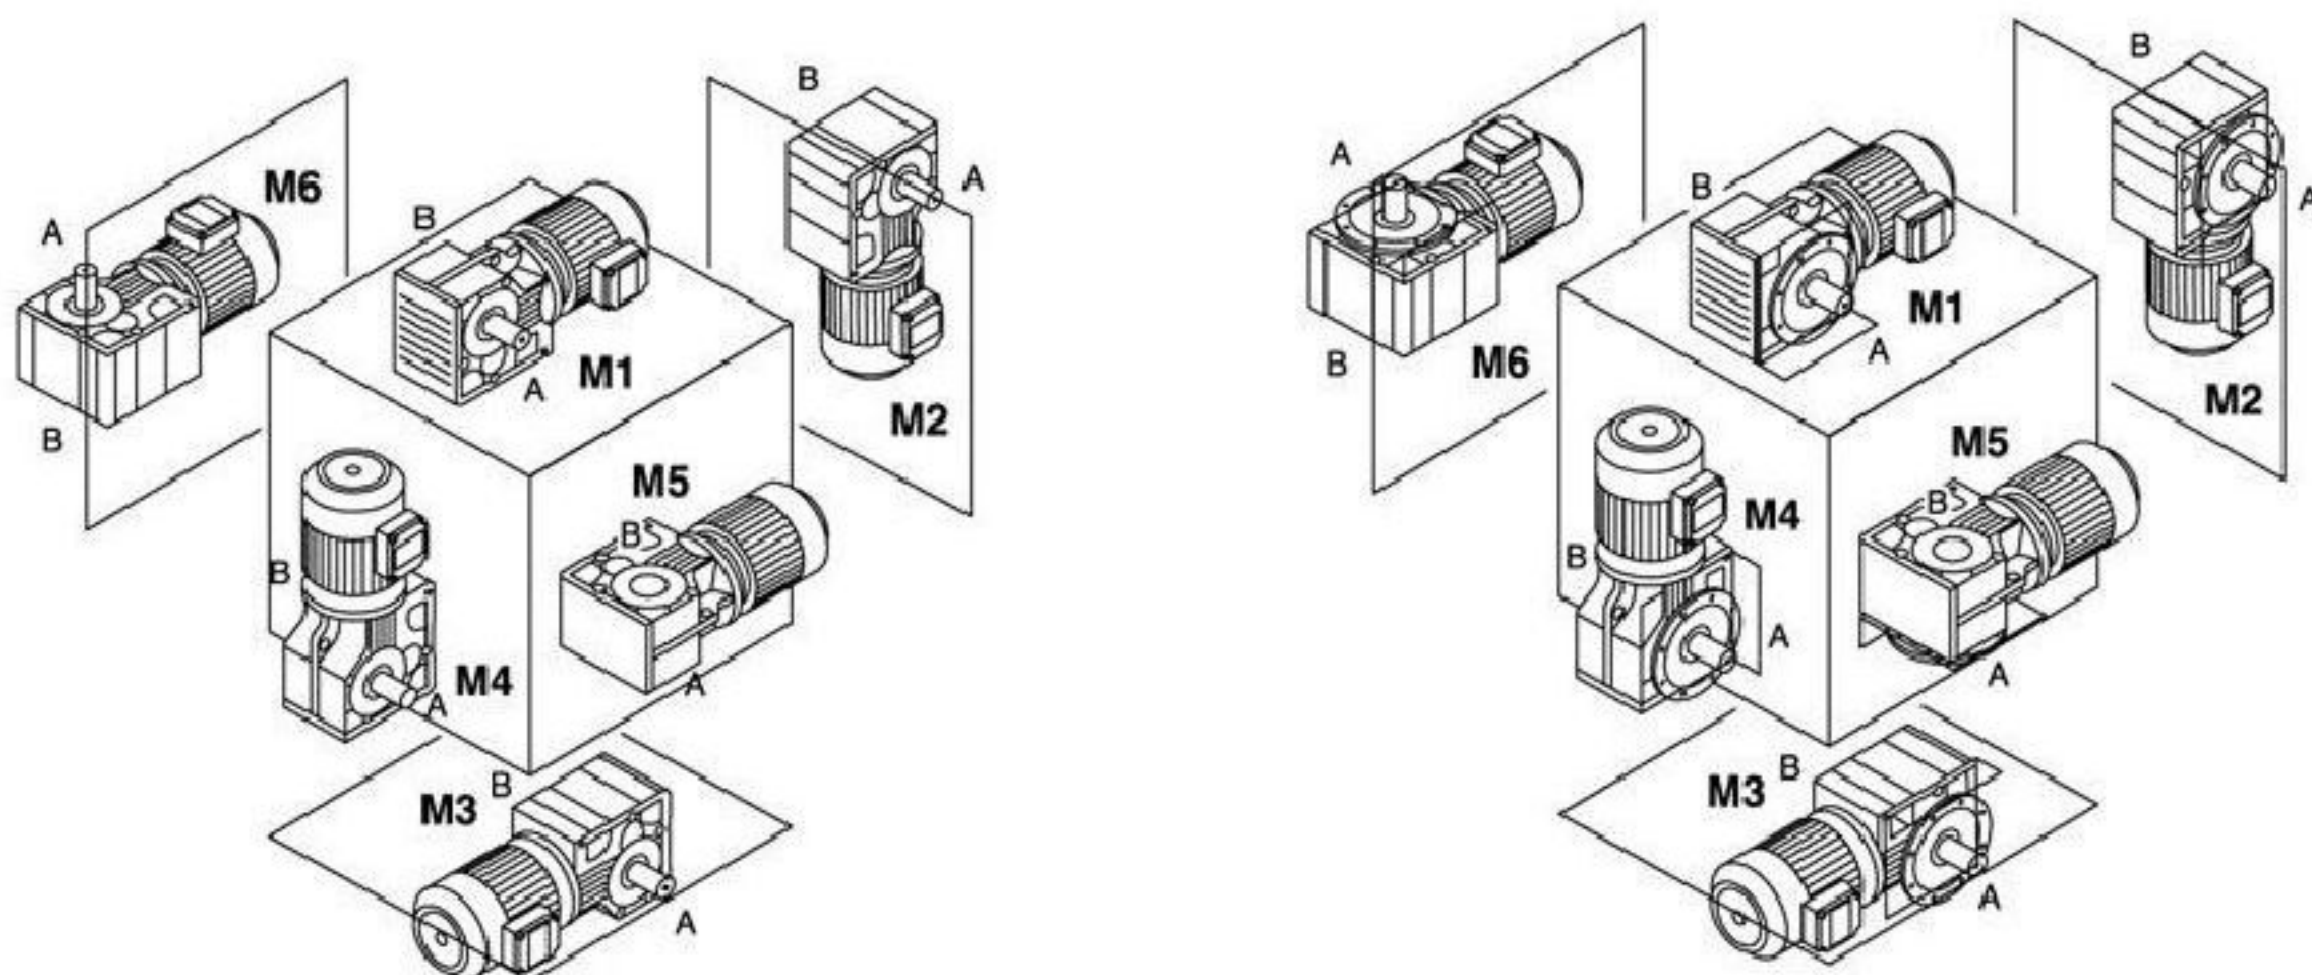


K

电机接线盒位置


Position of the motor thermal box




0°



90°



180°



270°

输入功率及许用转矩

Input power rating and permissible torque

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
结构形式 Structure	K KA KF KAF KAZ KAT KAB											
输入功率 Input power rating(kW)	0.18~3.0	0.18~3.0	0.18~5.5	0.18~5.5	0.37~11	0.75~22	1.1~30	3~45	7.5~90	11~160	11~200	18.5~200
传动比 Ratio	5.36~106.38	5.81~131.87	6.57~145.14	7.14~144.79	7.24~192.18	7.19~197.37	8.95~176.05	8.74~141.46	8.68~146.07	12.65~150.41	17.28~163.91	17.27~180.78
许用转矩 (N.m) Permissible torque	200	400	600	820	1550	2700	4300	8000	13000	18000	32000	50000

减速机重量

Gear unit weight

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
重量 (kg) Weight	11	20	27	33	57	85	130	250	380	610	1015	1700

所注重量为平均值, 仅供参考

The weights are mean values, only for reference.

润滑油量表 Lubrication table

K...,KAB...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.3	1	1
K..47	0.8	1.3	1.5	2	1.6	1.6
K..57	1.2	2.3	2.5	3	2.6	2.4
K..67	1.1	2.4	2.6	3.4	2.6	2.6
K..77	2.2	4.1	4.4	5.9	4.2	4.4
K..87	3.7	8	8.7	10.9	7.8	8
K..97	7	14	15.7	20	15.7	15.5
K..107	10	21	25.5	33.5	24	24
K..127	21	41.5	44	54	40	41
K..157	31	62	65	90	58	62
K..167	35	100	100	125	85	85
K..187	60	170	170	205	130	130

K

KF...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
KF37	0.5	1.1	1.1	1.5	1	1
KF47	0.8	1.3	1.7	2.2	1.6	1.6
KF57	1.3	2.3	2.7	3	2.9	2.7
KF67	1.1	2.4	2.8	3.6	2.7	2.7
KF77	2.1	4.1	4.4	6	4.5	4.5
KF87	3.7	8.2	9	11.9	8.4	8.4
KF97	7	14.7	17.3	21.5	15.7	16.5
KF107	10	22	26	35	25	25
KF127	21	41.5	46	55	41	41
KF157	31	66	69	92	62	62

KA..、KAF..、KAZ...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.4	1	1
K..47	0.8	1.3	1.6	2.1	1.6	1.6
K..57	1.3	2.3	2.7	3	2.9	2.7
K..67	1.1	2.4	2.7	3.6	2.6	2.6
K..77	2.1	4.1	4.6	6	4.4	4.4
K..87	3.7	8.2	8.8	11.1	8	8
K..97	7	14.7	15.7	20	15.7	15.7
K..107	10	20.5	24	32	24	24
K..127	21	41.5	43	52	40	40
K..157	31	66	67	87	62	62
KA..167	35	100	100	125	85	85
KA..187	60	170	170	205	130	130

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.18kW					
0.09	16482	14975	0.74		
0.11	13692	12440	0.89		
0.13	12013	10914	1.0		
0.14	10807	9819	1.1		
0.16	9293	8443	1.3	K 127R77	4
0.19	8236	7483	1.5	KF 127R77	4
0.21	7226	6565	1.7	KA 127R77	4
0.24	6388	5804	1.9	KAF127R77	4
0.28	5533	5027	2.2		
0.31	4868	4423	2.5		
0.37	4184	3801	2.9		
0.43	3563	3237	3.4		
0.17	9037	8211	0.8		
0.19	7888	7167	1.0		
0.23	6711	6097	1.1		
0.25	6144	5582	1.2		
0.27	5575	5065	1.3	K 107R77	4
0.32	4732	4299	1.6	KF 107R77	4
0.37	4135	3757	1.8	KA 107R77	4
0.43	3562	3236	2.1	KAF107R77	4
0.48	3158	2869	2.4		
0.56	2756	2504	2.7		
0.63	2425	2203	3.1		
0.30	5139	4669	0.79		
0.34	4493	4082	0.90		
0.39	3944	3583	1.0		
0.45	3421	3108	1.2		
0.50	3035	2757	1.3		
0.57	2662	2419	1.5		
0.65	2337	2123	1.7	K 97R57	4
0.75	2043	1856	2.0	KF 97R57	4
0.86	1789	1625	2.3	KA 97R57	4
0.97	1574	1430	2.6	KAF97R57	4
1.1	1388	1261	2.9		
1.3	1213	1102	3.3		
1.5	1053	957	3.8		
1.6	941	855	4.3		
1.9	818	743	4.9		
2.1	717	651	5.6		
0.45	3420	3107	0.74		
0.51	3003	2728	0.85		
0.59	2610	2371	0.97		
0.67	2298	2088	1.1		
0.75	2041	1854	1.2	K 87R57	4
0.84	1825	1658	1.4	KF 87R57	4
1.0	1557	1415	1.6	KA 87R57	4
1.1	1353	1229	1.9	KAF87R57	4
1.3	1187	1078	2.1		
1.5	1047	951	2.4		
1.7	921	837	2.8		
1.9	799	726	3.2		
0.9	1666	1514	0.9		
1.0	1528	1388	1.0		
1.1	1341	1218	1.1		
1.3	1159	1053	1.3	K 77R37	4
1.5	1017	924	1.4	KF 77R37	4
1.7	897	815	1.6	KA 77R37	4
2.0	780	709	1.9	KAF77R37	4
2.2	685	622	2.1		
2.5	608	552	2.4		
2.9	534	485	2.7		
3.2	471	428	3.1		
3.8	404	367	3.6		
输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.18kW					
1.5	994	903	0.78		
1.8	873	793	0.88		
2.0	767	697	1.0		
2.3	675	613	1.1	K 67R37	4
2.6	597	542	1.3	KF 67R37	4
3.0	518	471	1.5	KA 67R37	4
3.3	462	420	1.7	KAF67R37	4
3.9	397	361	1.9		
4.3	356	323	2.2		
5.1	299	272	2.6		
2.3	677	615	0.8		
2.6	599	544	0.9		
2.9	521	473	1.1		
3.3	463	421	1.2		
3.8	398	362	1.4	K 57R37	4
4.4	351	319	1.6	KF 57R37	4
5.1	300	273	1.9	KA 57R37	4
5.8	264	240	2.1	KAF57R37	4
6.5	237	215	2.4		
7.2	211	192	2.7		
8.4	183	166	3.1		
3.7	413	375	0.9		
4.3	359	326	1.0		
4.8	318	289	1.2		
5.6	275	250	1.4	K 47R37	4
6.2	248	225	1.5	KF 47R37	4
7.0	218	198	1.7	KA 47R37	4
8.3	184	167	2.0	KAF47R37	4
9.3	164	149	2.3		
11	141	128	2.7		
6.8	226	205	0.83		
7.7	199	181	0.94	K 37R17	4
8.7	176	160	1.07	KF 37R17	4
10	150	136	1.26	KA 37R17	4
11	140	127	1.34	KAF37R17	4
5.9	275	144.79	2.8		
6.9	235	123.54	3.3	K 67	6
7.9	205	108.03	3.8	KF 67	6
8.3	195	102.62	4.0	KA 67	6
				KAF67	6
9.6	168	144.79	4.6		
11	144	123.54	5.4	K 67	4
13	126	108.03	6.1	KF 67	4
				KA 67	4
				KAF67	4
5.9	276	145.14	2.0		
6.9	235	123.85	2.4	K 57	6
7.8	206	108.29	2.7	KF 57	6
8.3	196	102.88	2.9	KA 57	6
9.4	172	90.26	3.3	KAF57	6
9.6	169	145.14	3.3		
11	144	123.85	3.9	K 57	4
13	126	108.29	4.5	KF 57	4
14	120	102.88	4.7	KA 57	4
15	105	90.26	5.4	KAF57	4
18	89	76.56	6.3		
6.4	251	131.87	1.50		
7.0	231	121.48	1.63	K 47	6
8.1	198	104.37	1.90	KF 47	6
9.4	173	90.86	2.2	KA 47	6
10	162	85.12	2.3	KAF47	6

K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.18kW					
11	153	131.87	2.5	K 47	4
12	141	121.48	2.7	KF 47	4
13	121	104.37	3.1	KA 47	4
15	106	90.86	3.6	KAF47	4
16	99	85.12	3.8		
8.0	202	106.38	0.93	K 37	6
8.7	186	97.81	1.01	KF 37	6
10	159	83.69	1.18	KA 37	6
12	138	72.54	1.36	KAF37	6
13	124	106.38	1.52		
14	114	97.81	1.65		
17	97	83.69	1.93		
19	84	72.54	2.2		
21	79	67.80	2.4		
24	68	58.60	2.8		
28	58	49.79	3.2		
31	52	44.46	3.6		
37	44	37.97	4.3		
39	41	35.57	4.5	K 37	4
46	35	29.96	5.4	KF 37	4
48	34	28.83	5.6	KA 37	4
56	29	24.99	6.5	KAF37	4
60	27	23.36	6.7		
69	23	20.19	7.4		
81	20	17.15	8.5		
91	18	15.31	9.2		
106	15	13.08	10		
114	14	12.14	11		
133	12	10.49	12		
156	10	8.91	15		
175	9	7.96	16		
0.25kW					
0.14	15010	9819	0.81		
0.16	12907	8443	0.95		
0.19	11438	7482	1.07	K 127R77	4
0.21	10036	6565	1.2	KF 127R77	4
0.24	8872	5804	1.4	KA 127R77	4
0.28	7685	5027	1.6	KAF127R77	4
0.31	6761	4423	1.8		
0.37	5811	3801	2.1		
0.43	4948	3237	2.5		
0.23	9320	6097	0.81		
0.25	8533	5582	0.88		
0.27	7743	5065	1.0		
0.32	6572	4299	1.1		
0.37	5743	3757	1.3		
0.43	4947	3236	1.5	K 107R77	4
0.48	4386	2869	1.7	KF 107R77	4
0.56	3828	2504	2.0	KA 107R77	4
0.63	3368	2203	2.2	KAF107R77	4
0.74	2857	1869	2.6		
0.82	2582	1689	2.9		
0.91	2343	1533	3.2		
1.06	2013	1317	3.7		
0.45	4751	3108	0.9	K 97R57	4
0.50	4215	2757	1.0	KF 97R57	4
0.57	3698	2419	1.1	KA 97R57	4
0.65	3245	2123	1.2	KAF97R57	4
0.75	2837	1856	1.4		
0.25kW					
0.86	2484	1625	1.6		
1.0	2186	1430	1.8	K 97R57	4
1.1	1928	1261	2.1	KF 97R57	4
1.3	1685	1102	2.4	KA 97R57	4
1.5	1463	957	2.8	KAF97R57	4
1.6	1307	855	3.1		
0.7	3192	2088	0.80		
0.7	2834	1854	0.90		
0.8	2535	1658	1.0	K 87R57	4
1.0	2163	1415	1.2	KF 87R57	4
1.1	1879	1229	1.4	KA 87R57	4
1.3	1648	1078	1.5	KAF87R57	4
1.5	1454	951	1.7		
1.7	1280	837	2.0		
1.9	1110	726	2.3		
2.2	975	638	2.6		
1.3	1610	1053	0.9		
1.5	1413	924	1.0		
1.7	1246	815	1.2		
2.0	1084	709	1.3		
2.2	951	622	1.5		
2.5	844	552	1.7	K 77R37	4
2.9	741	485	2.0	KF 77R37	4
3.2	654	428	2.2	KA 77R37	4
3.9	547	358	2.7	KAF77R37	4
4.3	489	320	3.0		
4.9	433	283	3.4		
5.7	376	246	3.9		
6.4	330	216	4.4		
7.3	292	191	5.0		
8.2	260	170	5.6		
2.3	937	613	0.8		
2.6	829	542	0.9		
3.0	720	471	1.1	K 67R37	4
3.3	642	420	1.2	KF 67R37	4
3.9	552	361	1.4	KA 67R37	4
4.3	494	323	1.6	KAF67R37	4
5.1	416	272	1.9		
5.8	367	240	2.1		
6.4	332	217	2.3		
3.3	644	421	0.9		
3.8	553	362	1.0		
4.4	488	319	1.2		
5.1	417	273	1.4		
5.8	367	240	1.5	K 57R37	4
6.5	329	215	1.7	KF 57R37	4
7.2	294	192	1.9	KA 57R37	4
8.4	254	166	2.2	KAF57R37	4
9.9	216	141	2.6		
11	193	126	2.9		
13	165	108	3.4		
15	145	95	3.9		
4.2	536	154.02	2.7	K 77	8
4.8	471	135.28	3.1	KF 77	8
5.0	447	128.52	3.3	KA 77	8
5.7	395	113.56	3.7	KAF77	8
4.4	507	192.18	2.9	K 77	6
4.7	474	179.37	3.1	KF 77	6
5.5	407	154.02	3.6	KA 77	6
6.3	357	135.28	4.1	KAF77	6

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.25kW						0.37kW					
5.2	430	123.54	1.8	K 67	8	0.19	16930	7483	0.72	K 127R77	4
6.0	376	108.03	2.1	KF 67	8	0.21	14853	6565	0.82		
6.3	357	102.62	2.2	KA 67	8	0.24	13131	5804	0.93		
7.2	313	90.04	2.5	KAF67	8	0.28	11373	5027	1.07		
						0.31	10007	4423	1.22		
5.9	382	144.79	2.0	K 67	6	0.37	8600	3801	1.42	KA 127R77	4
6.9	326	123.54	2.4	KF 67	6	0.43	7324	3237	1.67	KAF127R77	4
7.9	285	108.03	2.7	KA 67	6	0.72	4357	1926	2.80		
8.3	271	102.62	2.8	KAF67	6	0.79	3975	1757	3.07		
						0.90	3486	1541	3.51		
9.6	234	144.79	3.3	K 67	4	0.37	8500	3757	0.88	K 107R77	4
11	199	123.54	3.9	KF 67	4	0.43	7321	3236	1.03		
13	174	108.03	4.4	KA 67	4	0.48	6491	2869	1.16		
14	166	102.62	4.7	KAF67	4	0.56	5665	2504	1.33		
						0.63	4984	2203	1.51		
5.9	383	145.14	1.5	K 57	6	0.74	4229	1869	1.78	KA 107R77	4
6.9	327	123.85	1.7	KF 57	6	0.82	3821	1689	1.97	KAF107R77	4
7.8	286	108.29	2.0	KA 57	6	0.91	3468	1533	2.2		
8.3	272	102.88	2.1	KAF57	6	1.06	2980	1317	2.5		
9.4	238	90.26	2.4			1.21	2602	1150	2.9		
11	202	76.56	2.8								
9.6	234	145.14	2.4	K 57	4	0.65	4803	2123	0.84	K 97R57	4
11	200	123.85	2.8	KF 57	4	0.75	4199	1856	0.96		
13	175	108.29	3.2	KA 57	4	0.86	3676	1625	1.10		
14	166	102.88	3.4	KAF57	4	0.97	3235	1430	1.25		
15	146	90.26	3.9			1.1	2853	1261	1.42		
18	124	76.56	4.6			1.3	2493	1102	1.62	KA 97R57	4
						1.5	2165	957	1.87	KAF97R57	4
6.4	348	131.87	1.08	K 47	6	1.6	1934	855	2.1		
7.0	321	121.48	1.17	KF 47	6	1.6	1934	855	2.1		
8.1	276	104.37	1.36	KA 47	6	1.9	1681	743	2.4		
9.4	240	90.86	1.57	KAF47	6	2.1	1473	651	2.7		
10	225	85.12	1.67			2.4	1296	573	3.1		
11	213	131.87	1.77	K 47	4	1.0	3201	1415	0.79	K 87R57	4
11	196	121.48	1.92	KF 47	4	1.1	2781	1229	0.91		
13	169	104.37	2.2	KA 47	4	1.3	2439	1078	1.04		
15	147	90.86	2.6	KAF47	4	1.5	2152	951	1.18		
16	137	85.12	2.7			1.7	1894	837	1.34		
10	221	83.69	0.9	K 37	6	1.9	1643	726	1.55	KA 87R57	4
12	192	72.54	1.0	KF 37	6	2.2	1443	638	1.76	KAF87R57	4
13	179	67.80	1.1	KA 37	6	2.5	1272	562	2.0		
15	155	58.60	1.2	KAF37	6	2.9	1072	474	2.4		
17	131	49.79	1.4			3.3	964	426	2.6		
						3.7	844	373	3.0		
13	172	106.38	1.1	K 37	4	1.7	1844	815	0.79	K 77R37	4
14	158	97.81	1.2			2.0	1604	709	0.91		
17	135	83.69	1.4			2.2	1407	622	1.04		
19	117	72.54	1.6			2.5	1249	552	1.17		
21	109	67.80	1.7			2.9	1097	485	1.33		
24	95	58.60	2.0			3.2	968	428	1.50	KF 77R37	4
28	80	49.79	2.3			3.9	810	358	1.80	KA 77R37	4
31	72	44.46	2.6			4.3	724	320	2.0	KAF77R37	4
37	61	37.97	3.1			4.9	640	283	2.3		
39	57	35.57	3.3	K 37	4	5.7	557	246	2.6		
46	48	29.96	3.9	KF 37	4	6.4	489	216	3.0		
48	47	28.83	4.0	KA 37	4	7.3	432	191	3.4		
56	40	24.99	4.7	KAF37	4	8.2	385	170	3.8		
60	38	23.36	4.9			9.3	339	150	4.3		
69	33	20.19	5.3			3.3	950	420	0.81	K 67R37	4
81	28	17.15	6.1			3.9	817	361	0.94		
91	25	15.31	6.7			4.3	731	323	1.05		
106	21	13.08	7.3			5.1	615	272	1.25		
114	20	12.14	7.7			5.8	543	240	1.42		
133	17	10.49	8.9			6.4	491	217	1.57	KA 67R37	4
156	14	8.91	10			7.3	432	191	1.78	KAF67R37	4
175	13	7.96	11			8.4	376	166	2.05		
204	11	6.80	13			9.7	326	144	2.37		
218	10	6.37	13			12	269	119	2.86		

K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数				
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole				
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p				
0.37kW						0.37kW									
5.1	618	273	0.91	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	8.5	392	104.37	0.96	K 47	6				
5.8	543	240	1.04			9.7	341	90.86	1.10	KF 47	6				
6.5	486	215	1.16			10	319	85.12	1.18	KA 47	6				
7.2	434	192	1.30			12	282	75.2	1.33	KAF47	6				
8.4	376	166	1.50			11	315	131.87	1.19	K 47 KF 47 KA 47 KAF47	4				
9.9	319	141	1.77			12	290	121.48	1.30						
11	285	126	1.98			13	249	104.37	1.51						
13	244	108	2.3			15	217	90.86	1.73						
15	215	95	2.6			16	203	85.12	1.85						
3.8	868	174.99	2.9	K 87	8	18	180	75.20	2.1						
	813	164.05	3.1	KF 87	8	20	167	69.84	2.3						
	729	147.09	3.5	KA 87	8	22	151	63.30	2.5						
				KAF87	8	14	234	97.81	0.80						
4.5	740	197.27	3.4	K 87	6	17	200	83.69	0.94	K 37 KF 37 KA 37 KAF37	4				
	5.1	657	174.99	3.9	KF 87	6	19	173	72.54			1.08			
				KA 87	6	21	162	67.80	1.16						
				KAF87	6	24	140	58.60	1.34						
5.0	671	135.28	2.2	K 77	8	28	119	49.79	1.58			K 37 KF 37 KA 37 KAF37	4		
	5.2	637	128.52	2.3	KF 77	8	31	106	44.46					1.77	
	5.9	563	113.56	2.6	KA 77	8	37	91	37.97					2.07	
	6.9	481	97.05	3.0	KAF77	8	39	85	35.57					2.21	
5.7	578	154.02	2.5	K 77	6	46	72	29.96	2.63					K 37 KF 37 KA 37 KAF37	4
	6.5	508	135.28	2.9	KF 77	6	48	69	28.83						
	6.9	482	128.52	3.0	KA 77	6	56	60	24.99	3.15					
	7.8	426	113.56	3.4	KAF77	6	60	56	23.36	3.28					
7.23	459	192.18	3.2	K 77	4	69	48	20.19	3.60	K 37 KF 37 KA 37 KAF37	4				
	7.75	429	179.37	3.4	KF 77	4	81	41	17.15						
	9.02	368	154.02	4.0	KA 77	4	91	37	15.31			4.5			
				KAF77	4	106	31	13.08	5.0						
6.2	536	108.03	1.44	K 67	8	114	29	12.14	5.2			K 37 KF 37 KA 37 KAF37	4		
	6.5	509	102.62	1.52	KF 67	8	133	25	10.49						
	7.4	446	90.04	1.73	KA 67	8	156	21	8.91					7.1	
				KAF67	8	175	19	7.96	7.7						
7.2	464	123.54	1.66	K 67	6	204	16	6.80	8.7					K 37 KF 37 KA 37 KAF37	4
	8.2	405	108.03	1.90	KF 67	6	218	15	6.37						
	8.6	385	102.62	2.0	KA 67	6	259	13	5.56	10					
	9.8	338	90.04	2.3	KAF67	6	0.55kW								
9.6	346	144.79	2.2	K 67	4	0.08	57099	16978	0.82	K 187R97 KA 187R97	4				
	11	295	123.54	2.6	KF 67	4	0.10	47998	14272						
	13	258	108.03	3.0	KA 67	4	0.11	44111	13116			1.07			
	15	215	90.04	3.6	KAF67	4	0.12	39170	11647			1.20			
	18	182	76.37	4.2		0.19	24662	7333	1.9						
						0.12	38783	11532	0.78						
7.1	465	123.85	1.2	K 57	6	0.14	34395	10227	0.87	K 167R97 KA 167R97	4				
	8.2	406	108.29	1.4	KF 57	6	0.16	28913	8597			1.04			
	8.6	386	102.88	1.5	KA 57	6	0.21	21988	6538			1.37			
	10	339	90.26	1.7	KAF57	6	0.26	18046	5366			1.67			
	12	287	76.56	2.0		0.34	13651	4059	2.2						
	13	259	69.12	2.2		0.20	23142	6881	0.73						
9.6	347	145.14	1.6	K 57	4	0.23	19947	5931	0.85	K 157R97 KF 157R97 KA 157R97 KAF157R97	4				
	11	296	123.85	1.9	KF 57	4	0.35	13365	3974			1.27			
	13	259	108.29	2.2	KA 57	4	0.46	10247	3047			1.65			
	14	246	102.88	2.3	KAF57	4	0.31	14875	4423			0.82			
	15	216	90.26	2.6		0.37	12783	3801	0.96						
	18	183	76.56	3.1		0.43	10886	3237	1.12						
	20	165	69.12	3.4		0.47	9891	2941	1.24						
						0.55	8569	2548	1.43						

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.55kW						0.55kW					
0.48	9649	2869	0.78	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	3.8	1290	174.99	2.0	K 87	8
0.56	8421	2504	0.89			4.1	1209	164.05	2.1	KF 87	8
0.63	7409	2203	1.01			4.5	1084	147.09	2.3	KA 87	8
0.74	6286	1869	1.20							KAF87	8
0.82	5680	1689	1.32			4.5	1101	197.27	2.3	K 87	6
0.91	5156	1533	1.46			5.1	976	174.99	2.6	KF 87	6
1.1	4429	1317	1.70			5.4	915	164.05	2.8	KA 87	6
1.2	3868	1150	1.94			6.0	821	147.09	3.1	KAF87	6
1.4	3414	1015	2.2								
1.6	2929	871	2.6			6.5	755	135.28	1.9	K 77	8
1.8	2630	782	2.9			6.9	717	128.52	2.0	KF 77	8
2.0	2307	686	3.3			7.8	634	113.56	2.3	KA 77	8
2.3	2038	606	3.7			9.1	541	97.05	2.7	KAF77	8
1.0	4809	1430	0.8	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	5.7	859	154.02	1.70	K 77	6
1.1	4241	1261	1.0			6.5	755	135.28	1.93	KF 77	6
1.3	3706	1102	1.1			6.9	717	128.52	2.0	KA 77	6
1.5	3218	957	1.3			7.8	634	113.56	2.3	KAF77	6
1.6	2875	855	1.4								
1.9	2499	743	1.6			9.0	547	154.02	2.7	K 77	4
2.1	2189	651	1.8			10	481	135.28	3.0	KF 77	4
2.4	1927	573	2.1			11	457	128.52	3.2	KA 77	4
2.8	1695	504	2.4			12	403	113.56	3.6	KAF77	4
3.2	1470	437	2.8			14	345	97.05	4.2		
3.6	1285	382	3.1	K 87R57 KF 87R57 KA 87R57 KAF87R57	4	7.2	689	123.54	1.12	K 67	6
4.6	1026	305	3.9			8.2	603	108.03	1.28	KF 67	6
1.5	3198	951	0.79			8.6	573	102.62	1.35	KA 67	6
1.7	2815	837	0.90			10	502	90.04	1.53	KAF67	6
1.9	2442	726	1.04			12	426	76.37	1.81		
2.2	2146	638	1.18			11	439	123.54	1.76	K 67	4
2.5	1890	562	1.34			13	384	108.03	2.0	KF 67	4
2.9	1594	474	1.59			15	320	90.04	2.4	KA 67	4
3.3	1433	426	1.77			18	271	76.37	2.8	KAF67	4
3.7	1254	373	2.0								
4.2	1110	330	2.3	K 77R37 KF 77R37 KA 77R37 KAF77R37	4	8.2	604	108.29	0.93	K 57 KF 57 KA 57 KAF57	6
4.7	985	293	2.6			8.6	574	102.88	0.98		
5.6	841	250	3.0			9.8	504	90.26	1.12		
5.9	794	236	3.2			12	427	76.56	1.32		
6.9	676	201	3.8			13	386	69.12	1.46	KA 57	6
2.5	1856	552	0.78			14	339	60.81	1.66	KAF57	6
2.9	1631	485	0.89			15	320	57.42	1.76		
3.2	1439	428	1.01								
3.9	1204	358	1.21			11	440	123.85	1.28	K 57 KF 57 KA 57 KAF57	4
4.3	1076	320	1.35			13	385	108.29	1.47		
4.9	952	283	1.53			14	365	102.88	1.54		
5.7	827	246	1.76			15	321	90.26	1.76		
6.4	726	216	2.0			18	272	76.56	2.1		
7.3	642	191	2.3			20	246	69.12	2.3		
8.2	572	170	2.5			23	216	60.81	2.6		
9.3	504	150	2.9			24	204	57.42	2.8		
5.1	915	272	0.84	K 67R37 KF 67R37 KA 67R37 KAF67R37	4	13	371	104.37	1.01	K 47 KF 47 KA 47 KAF47	4
5.8	807	240	0.95			15	323	90.86	1.17		
6.4	730	217	1.1			16	302	85.12	1.24		
7.3	642	191	1.2			18	267	75.20	1.41		
8.4	558	166	1.4			20	248	69.84	1.52		
9.7	484	144	1.6			22	225	63.30	1.67		
12	400	119	1.9			24	202	56.83	1.86		
						28	174	48.95	2.2		
7.2	646	192	0.87	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	30	164	46.03	2.3		
8.4	558	166	1.0			24	208	58.6	0.90	K 37	4
9.9	474	141	1.2			28	177	49.79	1.06	KF 37	4
11	424	126	1.3			31	158	44.46	1.19	KA 37	4
13	363	108	1.6			37	135	37.97	1.39	KAF37	4
15	319	95	1.8								

K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _Ⓢ	Type	p	r/min	Nm	i	f _Ⓢ	Type	p
0.55kW						0.75kW					
39	126	35.57	1.49	K 37 KF 37 KA 37 KAF37	4	1.9	3329	726	0.76	K 87R57 KF 87R57 KA 87R57 KAF87R57	4
46	106	29.96	1.77			2.2	2926	638	0.87		
48	102	28.83	1.84			2.5	2577	562	0.98		
56	89	24.99	2.1			2.9	2174	474	1.17		
60	83	23.36	2.2			3.3	1954	426	1.30		
69	72	20.19	2.4			3.7	1711	373	1.48		
81	61	17.15	2.8			4.2	1513	330	1.68		
91	54	15.31	3.0			4.7	1344	293	1.89	K 77R37 KF 77R37 KA 77R37 KAF77R37	4
106	46	13.08	3.3			5.6	1147	250	2.2		
114	43	12.14	3.5			5.9	1082	236	2.3		
133	37	10.49	4.0			6.9	922	201	2.8		
156	32	8.91	4.8			3.9	1642	358	0.89		
175	28	7.96	5.2			4.3	1468	320	0.99		
204	24	6.80	5.8			4.9	1298	283	1.12		
218	23	6.37	6.0			5.7	1128	246	1.29		
259	19	5.36	6.9			6.4	991	216	1.47		
0.75kW						0.75kW					
0.11	60151	13116	0.78	K 187R97 KA 187R97	4	3.9	1737	175.47	2.3	K 97 KF 97 KA 97 KAF97	8
0.12	53414	11647	0.88			4.4	1508	152.31	2.7		
0.19	33630	7333	1.40			4.8	1389	140.28	2.9		
0.21	30901	6738	1.52			0.75kW					
0.23	27443	5984	1.71			4.6	1456	147.09	1.7	K 87 KF 87 KA 87 KAF87	8
0.16	39426	8597	0.76	K 167R97 KA 167R97	4	5.4	1254	126.68	2.0		
0.21	29984	6538	1.00			5.9	1140	115.16	2.2		
0.26	24609	5366	1.22			6.6	1017	102.71	2.5		
0.34	18615	4059	1.62			0.75kW					
0.41	15405	3359	1.95			5.2	1295	174.99	2.0	K 87 KF 87 KA 87 KAF87	6
0.35	18225	3974	0.93	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	5.5	1214	164.05	2.1		
0.46	13974	3047	1.21			6.2	1088	147.09	2.3		
0.83	7705	1680	2.2			7.2	937	126.68	2.7		
1.02	6260	1365	2.7			7.0	956	197.27	2.7	K 87 KF 87 KA 87 KAF87	4
0.43	14845	3237	0.82	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	8.0	848	174.99	3.0		
0.47	13488	2941	0.91			8.5	795	164.05	3.2		
0.55	11685	2548	1.05			9.4	712	147.09	3.6		
0.72	8833	1926	1.38			6.7	1001	135.28	1.46	K 77 KF 77 KA 77 KAF77	6
0.79	8058	1757	1.52			7.1	951	128.52	1.53		
0.90	7067	1541	1.73			8.0	840	113.56	1.73		
1.0	6154	1342	1.99			9.4	718	97.05	2.0		
1.2	5398	1177	2.3			10	658	88.97	2.2		
1.4	4701	1025	2.6			9.0	746	154.02	1.95	K 77 KF 77 KA 77 KAF77	4
1.5	4123	899	3.0			10	655	135.28	2.2		
0.82	7746	1689	0.97	11	623	128.52	2.3				
0.91	7030	1533	1.07	12	550	113.56	2.6				
1.1	6040	1317	1.25	14	470	97.05	3.1				
1.2	5274	1150	1.43	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	11	598	123.54	1.29	K 67 KF 67 KA 67 KAF67	4
1.4	4655	1015	1.62			13	523	108.03	1.47		
1.6	3994	871	1.88			15	436	90.04	1.77		
1.8	3586	782	2.1			18	370	76.37	2.1		
2.0	3146	686	2.4			20	334	68.95	2.3		
2.3	2779	606	2.7			23	294	60.66	2.6		
1.3	5054	1102	0.8			24	277	57.28	2.8		
1.5	4389	957	0.9			11	600	123.85	0.9	K 57 KF 57 KA 57 KAF57	4
1.6	3921	855	1.0			13	525	108.29	1.1		
1.9	3407	743	1.2	14	498	102.88	1.1				
2.1	2986	651	1.4	15	437	90.26	1.3				
2.4	2628	573	1.5	18	371	76.56	1.5				
2.8	2311	504	1.7	20	335	69.12	1.7				
3.2	2004	437	2.0	23	295	60.81	1.9				
3.6	1752	382	2.3	24	278	57.42	2.0				
4.6	1399	305	2.9	28	237	48.89	2.4				
5.4	1183	258	3.4	31	215	44.43	2.6				
6.0	1064	232	3.8	0.75kW							
7.0	913	199	4.4	0.75kW							

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.75kW						1.1kW					
18	364	75.2	1.03	K 47 KF 47 KA 47 KAF47	4	1.5	6047	899	2.0	K 127R77 KF 127R77 KA 127R77 KAF127R77	4
20	338	69.84	1.11			1.8	5314	790	2.3		
22	307	63.30	1.23			2.0	4641	690	2.6		
24	275	56.83	1.37			2.3	4029	599	3.0		
28	237	48.95	1.59			2.6	3625	539	3.4		
30	223	46.03	1.69			3.0	3148	468	3.9		
35	192	39.61	1.96			1.2	7735	1150	1.0	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
39	171	35.39	2.2			1.4	6827	1015	1.1		
45	151	31.19	2.5			1.6	5859	871	1.3		
31	215	44.46	0.87	K 37 KF 37 KA 37 KAF37	4	1.8	5260	782	1.4		
37	184	37.97	1.02			2.0	4614	686	1.6		
39	172	35.57	1.09			2.3	4076	606	1.8		
46	145	29.96	1.30			2.7	3464	515	2.2		
48	140	28.83	1.35			3.1	3060	455	2.5		
56	121	24.99	1.55			3.5	2704	402	2.8		
60	113	23.36	1.62			4.0	2361	351	3.2		
69	98	20.19	1.78			4.5	2065	307	3.6		
81	83	17.15	2.0	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	1.9	4998	743	0.81	K 87R57 KF 87R57 KA 87R57 KAF87R57	4
91	74	15.31	2.2			2.1	4379	651	0.92		
106	63	13.08	2.4			2.4	3854	573	1.05		
114	59	12.14	2.6			2.8	3390	504	1.19		
133	51	10.49	3.0			3.2	2939	437	1.38		
156	43	8.91	3.5			3.6	2569	382	1.57		
175	39	7.96	3.8			4.1	2300	342	1.76		
204	33	6.80	4.3			2.9	3188	474	0.80	K 97 KF 97 KA 97 KAF97	8
218	31	6.37	4.4			3.3	2865	426	0.89		
259	26	5.36	5.1			3.7	2509	373	1.01		
0.15	62528	9363	0.75	K 187R97 KA 187R97	4	4.2	2220	330	1.14		
0.17	54267	8126	0.87			4.7	1971	293	1.29		
0.19	48971	7333	0.96			5.6	1682	250	1.51		
0.21	44998	6738	1.04			5.9	1587	236	1.60		
0.23	39962	5984	1.18			6.9	1352	201	1.88		
0.26	35728	5350	1.32			3.9	2548	175.47	1.6		
0.29	32122	4810	1.46			4.4	2212	152.31	1.8		
0.32	29144	4364	1.61			4.8	2037	140.28	2.0		
0.26	35835	5366	0.84	K 167R97 KA 167R97	4	5.5	1810	124.61	2.2	K 97 KF 97 KA 97 KAF97	6
0.29	32042	4798	0.94			5.2	1904	175.47	2.1		
0.34	27107	4059	1.11			5.9	1653	152.31	2.4		
0.42	22432	3359	1.34			6.5	1522	140.28	2.7		
0.51	18305	2741	1.64			7.3	1352	124.61	3.0		
0.64	14518	2174	2.1			8.0	1238	175.47	3.3		
0.82	11340	1698	2.7			9.1	1074	152.31	3.7		
1.00	9363	1402	3.2			10	989	140.28	4.1		
1.08	8622	1291	3.5			5.2	1899	174.99	1.34	K 87 KF 87 KA 87 KAF87	6
0.40	23480	3516	0.72	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	5.5	1780	164.05	1.42		
0.46	20375	3051	0.83			6.2	1596	147.09	1.59		
0.54	17430	2610	0.97			7.2	1375	126.68	1.84		
0.60	15507	2322	1.09			8.0	1234	174.99	2.1		
0.83	11219	1680	1.51			8.5	1157	164.05	2.2		
1.0	9116	1365	1.86			9.5	1037	147.09	2.4		
1.1	8207	1229	2.1			11	894	126.68	2.8		
1.3	7299	1093	2.3			12	812	115.16	3.1		
1.5	6291	942	2.7	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	6.7	1468	135.28	0.99	K 77 KF 77 KA 77 KAF77	6
1.6	5703	854	3.0			7.1	1395	128.52	1.04		
0.72	12955	1926	0.9			8.0	1232	113.56	1.18		
0.79	11818	1757	1.0			9.4	1053	97.05	1.38		
0.90	10365	1541	1.2								
1.0	9027	1342	1.4								
1.2	7917	1177	1.5								
1.4	6894	1025	1.8								

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
1.1kW						1.5kW					
10	954	135.28	1.53	K 77 KF 77 KA 77 KAF77	4	0.21	61360	6738	0.77	K 187R97 KA 187R97	4
11	906	128.52	1.61		4	0.23	54494	5984	0.86		4
12	801	113.56	1.82		4	0.26	48720	5350	0.96		4
14	685	97.05	2.1		4	0.29	43803	4810	1.07		4
16	628	88.97	2.3		4	0.32	39741	4364	1.18		4
18	551	78.07	2.6		4	0.39	32866	3609	1.43		4
19	522	73.99	2.8			0.46	27884	3062	1.69		
						0.56	22940	2519	2.0		
						0.62	20654	2268	2.3		
13	762	108.03	1.01	K 67 KF 67 KA 67 KAF67	4	0.34	36964	4059	0.81	K 167R97 KA 167R97	4
14	724	102.62	1.06		4	0.42	30589	3359	0.98		4
16	635	90.04	1.21		4	0.51	24961	2741	1.21		4
18	539	76.37	1.43		4	0.64	19798	2174	1.52		4
20	486	68.95	1.58		4	0.82	15463	1698	1.95		4
23	428	60.66	1.80		4	1.0	12767	1402	2.4		4
24	404	57.28	1.91		4	1.1	11757	1291	2.6		4
29	344	48.77	2.2		4						
32	313	44.32	2.5			0.6	21118	2319	0.8	K 157R97 KF 157R97 KA 157R97 KAF157R97	4
36	271	38.39	2.8			0.8	15299	1680	1.1		4
						1.0	12431	1365	1.4		4
16	637	90.26	0.89	K 57 KF 57 KA 57 KAF57	4	1.1	11192	1229	1.5		4
18	540	76.56	1.04		4	1.3	9954	1093	1.7		4
20	488	69.12	1.16		4	1.5	8578	942	2.0		4
23	429	60.81	1.31		4	1.6	7777	854	2.2		4
24	405	57.42	1.39		4	2.5	5145	565	3.3		4
29	345	48.89	1.64		4	2.8	4581	503	3.7		4
32	313	44.43	1.80		4						4
36	271	38.49	2.1		4	2.6	4881	536	2.5		4
39	252	35.70	2.2		4	3.3	3807	418	3.2		4
46	214	30.28	2.6		4	3.8	3342	367	3.7		4
51	193	27.34	2.9		4						4
58	170	24.05	3.3		4	0.80	16000	1757	0.76	K 127R87 KF 127R87 KA 127R87 KAF127R87	4
62	160	22.71	3.5		4	0.91	14033	1541	0.87		4
72	136	19.34	4.0		4	1.0	12221	1342	1.00		4
80	124	17.57	4.2		4	1.2	10718	1177	1.14		4
92	107	15.22	4.6		4	1.4	9334	1025	1.31		4
106	93	13.25	4.7		4	1.6	8187	899	1.49		4
117	84	11.92	4.9		4	1.8	7194	790	1.70		4
124	79	11.26	5.1		4	2.0	6284	690	1.94		4
146	68	9.59	5.6			2.3	5455	599	2.2	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
161	61	8.71	6.0			2.6	4908	539	2.5		4
185	53	7.55	6.4			3.0	4262	468	2.9		4
213	46	6.57	7.0			3.4	3734	410	3.3		4
											4
25	401	56.83	0.94	K 47 KF 47 KA 47 KAF47	4	1.4	9243	1015	0.8		4
29	345	48.95	1.09		4	1.6	7932	871	0.9		4
30	325	46.03	1.16		4	1.8	7121	782	1.1		4
35	279	39.61	1.35		4	2.0	6247	686	1.2		4
40	250	35.39	1.51		4	2.3	5519	606	1.4		4
45	220	31.19	1.71		4	2.7	4690	515	1.6		4
48	207	29.32	1.82		4	3.1	4144	455	1.8		4
54	183	25.91	2.1			3.5	3661	402	2.1		4
64	154	21.81	2.4			4.0	3196	351	2.4	K 97R57 KF 97R57 KA 97R57 KAF97R57	4
72	138	19.58	2.7			4.6	2796	307	2.7		4
											4
47	211	29.96	0.89	K 37 KF 37 KA 37 KAF37	4	2.4	5218	573	0.8		4
56	176	24.99	1.07		4	2.8	4590	504	0.9		4
60	165	23.36	1.11		4	3.2	3980	437	1.0		4
69	142	20.19	1.22		4	3.7	3479	382	1.2		4
82	121	17.15	1.40		4	4.1	3114	342	1.3		4
91	108	15.31	1.52		4	4.6	2778	305	1.5		4
107	92	13.08	1.68		4	5.4	2350	258	1.7		4
115	86	12.14	1.76		4	6.0	2113	232	1.9		4
133	74	10.49	2.0		4	7.0	1812	199	2.2		4
157	63	8.91	2.4								
176	56	7.96	2.6								
206	48	6.80	2.9								
220	45	6.37	3.0								
261	38	5.36	3.5								

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
1.5kW						1.5kW							
4.2	3005	330	0.84	K 87R57 KF 87R57 KA 87R57 KAF87R57	4	23	585	60.81	0.96	K 57 KF 57 KA 57 KAF57	4		
4.8	2668	293	0.95		4	24	552	57.42	1.02			4	
5.6	2277	250	1.11		4	29	470	48.89	1.20			4	
5.9	2149	236	1.18		4	32	427	44.43	1.32			4	
7.0	1830	201	1.39		4	36	370	38.49	1.52			4	
7.7	1667	183	1.52		4	39	343	35.70	1.64			4	
4.9	2770	141.93	2.7	K 107	8	46	291	30.28	1.94	KAF57	4		
5.8	2334	119.58	3.2	KF 107	8	51	263	27.34	2.1				
6.2	2163	110.83	3.5	KA 107	8	58	231	24.05	2.4				
				KAF107	8	62	218	22.71	2.6				
						72	186	19.34	2.9				
4.5	2972	152.31	1.36	K 97	8	35	381	39.61	0.99	K 47 KF 47 KA 47 KAF47	4		
4.9	2738	140.28	1.48	KF 97	8	40	340	35.39	1.10			4	
5.5	2432	124.61	1.66	KA 97	8	45	300	31.19	1.25			4	
				KAF97	8	48	282	29.32	1.33			4	
5.2	2569	175.47	1.57	K 97	6	54	249	25.91	1.51			4	
6.0	2229	152.31	1.81	KF 97	6	64	210	21.81	1.79			4	
6.6	2053	140.28	1.97	KA 97	6	72	188	19.58	2.0	4			
7.4	1824	124.61	2.2	KAF97	6	83	162	16.86	2.2	KAF47	4		
8.0	1688	175.47	2.4	K 97	4	88	153	15.86	2.3				
9.2	1465	152.31	2.7	KF 97	4	103	131	13.65	2.6				
10	1349	140.28	3.0	KA 97	4	115	117	12.19	2.8				
11	1199	124.61	3.4	KAF97	4	119	113	11.77	2.3				
6.3	2153	147.09	1.18	K 87	6	60	225	23.36	0.82	K 37 KF 37 KA 37 KAF37	4		
7.2	1854	126.68	1.37	KF 87	6	69	194	20.19	0.90			4	
7.9	1686	115.16	1.50	KA 87	6	82	165	17.15	1.03			4	
9.0	1503	102.71	1.69	KAF87	6	91	147	15.31	1.12			4	
8.0	1683	174.99	1.51	K 87 KF 87 KA 87 KAF87	4	107	126	13.08	1.23			4	
8.5	1578	164.05	1.61		4	115	117	12.14	1.29			4	
9.5	1415	147.09	1.79		4	133	101	10.49	1.49	4			
11	1218	126.68	2.1		4	157	86	8.91	1.75	4			
12	1108	115.16	2.3		4	176	77	7.96	1.90	4			
14	988	102.71	2.6		4	206	65	6.80	2.2	4			
16	830	86.34	3.1			220	61	6.37	2.2				
						261	52	5.36	2.6				
						2.2kW							
						0.33	57466	4364	0.82	K 187R97 KA 187R97	4		
						0.39	47524	3609	0.99			4	
						0.46	40321	3062	1.17			4	
						0.50	37108	2818	1.27			4	
						0.56	33171	2519	1.42			4	
						0.63	29866	2268	1.57			4	
						0.69	27048	2054	1.74			4	
						0.78	23979	1821	1.96			4	
						0.88	21135	1605	2.2			4	
						0.52	36094	2741	0.83	K 167R97 KA 167R97	4		
						0.63	29655	2252	1.01			4	
						0.65	28628	2174	1.05			4	
						0.84	22360	1698	1.35			4	
						1.0	18462	1402	1.63			4	
						1.1	17000	1291	1.77			4	
						1.3	14498	1101	2.1			4	
						1.5	12431	944	2.4			4	
						0.85	22123	1680	0.76			K 157R97 KF 157R97 KA 157R97 KAF157R97	4
						1.0	17975	1365	0.94	4			
						1.2	16184	1229	1.05	4			
						1.3	14393	1093	1.18	4			
						1.5	12404	942	1.36	4			
						1.7	11246	854	1.50	4			
						1.9	9955	756	1.70	4			

K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
2.2kW					
2.6	7058	536	1.73	K 127R87 KF 127R87 KA 127R87 KAF127R87	4
3.0	6229	473	1.96		4
3.4	5504	418	2.2		4
3.9	4833	367	2.5		4
4.3	4346	330	2.8		4
1.4	13497	1025	0.91	K 127R77 KF 127R77 KA 127R77 KAF127R77	4
1.6	11838	899	1.03		4
1.8	10403	790	1.17		4
2.1	9086	690	1.34		4
2.4	7888	599	1.55		4
2.6	7098	539	1.72		4
3.0	6163	468	1.98		4
3.5	5399	410	2.3		4
2.3	7980	606	0.94	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
2.8	6782	515	1.11		4
3.1	5992	455	1.26		4
3.5	5294	402	1.42		4
4.0	4622	351	1.63		4
4.6	4043	307	1.86		4
5.1	3648	277	2.1		4
5.8	3200	243	2.4		4
3.7	5030	382	0.80	K 97R57 KF 97R57 KA 97R57 KAF97R57	4
4.2	4504	342	0.90		4
4.7	4016	305	1.01		4
5.5	3397	258	1.19		4
6.1	3055	232	1.32		4
7.1	2620	199	1.54		4
5.0	3948	141.93	1.90	K 107 KF 107 KA 107 KAF107	8
5.9	3326	119.58	2.3		8
6.4	3083	110.83	2.4		8
7.1	2763	99.34	2.7		8
6.1	3200	152.31	1.26	K 97 KF 97 KA 97 KAF97	6
6.7	2947	140.28	1.37		6
7.5	2618	124.61	1.54		6
14	1443	103.78	2.80		6
8.1	2440	175.47	1.66	K 97 KF 97 KA 97 KAF97	4
9.3	2118	152.31	1.91		4
10	1951	140.28	2.1		4
11	1733	124.61	2.3		4
14	1443	103.78	2.8		4
15	1346	96.80	3.0		4
9.7	2046	147.09	1.24	K 87 KF 87 KA 87 KAF87	4
11	1762	126.68	1.44		4
12	1602	115.16	1.58		4
14	1428	102.71	1.78		4
16	1201	86.34	2.1		4
18	1103	79.34	2.3		4
20	980	70.46	2.6		4
23	876	63.00	2.9		4
13	1579	113.56	0.9	K 77 KF 77 KA 77 KAF77	4
15	1350	97.05	1.08		4
16	1237	88.97	1.18		4
18	1086	78.07	1.34		4
19	1029	73.99	1.42		4
22	901	64.75	1.62		4
24	811	58.34	1.80		4
28	712	51.18	2.0		4
31	628	45.16	2.3		4
35	557	40.04	2.6		4

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
2.2kW					
40	490	35.20	3.0	K 77 KF 77 KA 77 KAF77	4
46	430	30.89	3.4		4
49	407	29.27	3.6		4
55	356	25.62	4.1		4
23	844	60.66	0.91	K 67 KF 67 KA 67 KAF67	4
25	797	57.28	0.97		4
29	678	48.77	1.14		4
32	616	44.32	1.25		4
37	534	38.39	1.44		4
40	495	35.62	1.56		4
47	420	30.22	1.83		4
52	379	27.28	2.0		4
59	334	24.00	2.3		4
63	315	22.66	2.3		4
74	268	19.30	2.7		4
81	244	17.54	2.9		4
93	211	15.19	3.1		4
107	184	13.22	3.4		4
116	170	12.24	2.9		4
136	145	10.42	3.2		4
150	132	9.47	3.4		4
173	114	8.20	3.6		4
199	99	7.14	4.0		4
32	618	44.43	0.91	K 57 KF 57 KA 57 KAF57	4
37	535	38.49	1.05		4
40	497	35.70	1.14		4
47	421	30.28	1.34		4
52	380	27.34	1.48		4
59	334	24.05	1.69		4
63	316	22.71	1.79		4
73	269	19.34	2.0		4
81	244	17.57	2.1		4
93	212	15.22	2.4		4
107	184	13.25	2.3		4
119	166	11.92	2.4		4
126	157	11.26	2.5		4
55	360	25.91	1.04	K 47 KF 47 KA 47 KAF47	4
65	303	21.81	1.24		4
73	272	19.58	1.38		4
84	234	16.86	1.52		4
90	221	15.86	1.62		4
104	190	13.65	1.78		4
116	170	12.19	1.94		4
121	164	11.77	1.61		4
134	147	10.56	1.79		4
156	127	9.10	2.1		4
109	182	13.08	0.85	K 37 KF 37 KA 37 KAF37	4
135	146	10.49	1.03		4
159	124	8.91	1.21		4
178	111	7.96	1.32		4
209	95	6.80	1.49		4
223	89	6.37	1.54		4
265	75	5.36	1.77		4

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
3.0kW						3.0kW							
0.46	54983	3062	0.85	K 187R97 KA 187R97	4	10	2692	141.93	2.8	K 107	4		
0.5	50602	2818	0.93			12	2268	119.58	3.3	KF 107	4		
0.56	45233	2519	1.04			7.7	3496	124.61	1.16	K 97	6		
0.63	40726	2268	1.15										
0.69	36883	2054	1.27										
0.78	32699	1821	1.44										
0.88	28820	1605	1.63										
1.0	25050	1395	1.88										
1.2	21476	1196	2.2	11	2427	86.52	1.67	KAF97	6				
0.84	30490	1698	0.99	K 167R97 KF 167R97 KA 167R97 KAF167R97	4	8.1	3328	175.47	1.21	K 97 KF 97 KA 97 KAF97	4		
1.0	25175	1402	1.2			9.3	2889	152.31	1.40				
1.1	23182	1291	1.3			10	2660	140.28	1.52				
1.3	19770	1101	1.52			11	2363	124.61	1.71				
1.5	16951	944	1.77			14	1968	103.78	2.05				
1.7	15137	843	1.99			15	1836	96.80	2.20				
1.9	13593	757	2.2			16	1646	86.52	2.46				
						18	1477	77.89	2.74				
1.2	22069	1229	0.77	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	20	1338	70.54	3.02	K 87 KF 87 KA 87 KAF87	4		
1.3	19627	1093	0.86			23	1186	62.55	3.41				
1.5	16915	942	1.00			25	1072	56.55	3.77				
1.7	15335	854	1.10			9.6	2790	147.09	0.91				
1.9	13575	756	1.25										
2.5	10146	565	1.67										
2.8	9032	503	1.87										
2.6	9625	536	1.27	11	2403							126.68	1.06
3.0	8494	473	1.44	12	2184							115.16	1.16
3.4	7506	418	1.63	14	1948							102.71	1.30
3.9	6590	367	1.85	16	1637							86.34	1.55
4.3	5926	330	2.1	18	1505							79.34	1.69
4.9	5207	290	2.3	20	1336							70.46	1.90
				23	1195							63.00	2.1
				25	1074							56.64	2.4
				29	932	49.16	2.7						
				32	835	44.02	2.9						
				39	693	36.52	3.4						
1.8	14186	790	0.86	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	16	1687	88.97	0.86	K 77 KF 77 KA 77 KAF77	4		
2.1	12390	690	0.99			18	1481	78.07	0.98				
2.4	10756	599	1.14			19	1403	73.99	1.04				
2.6	9679	539	1.26			22	1228	64.75	1.19				
3.0	8404	468	1.45			24	1106	58.34	1.32				
3.5	7362	410	1.66			28	971	51.18	1.50				
3.1	8170	455	0.92	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	31	856	45.16	1.70	K 67 KF 67 KA 67 KAF67	4		
3.5	7219	402	1.04			35	759	40.04	1.92				
4.0	6303	351	1.19			40	668	35.20	2.2				
4.6	5513	307	1.36			46	586	30.89	2.5				
5.1	4974	277	1.51			32	841	44.32	0.92				
5.8	4363	243	1.72										
6.6	3861	215	1.95										
7.5	3394	189	2.2										
8.5	3017	168	2.5										
9.5	2676	149	2.8										
10	2496	139	3.0										
5.5	4893	258	0.83	37	728							38.39	1.06
6.1	4400	232	0.92	40	676							35.62	1.14
7.1	3774	199	1.07	47	573							30.22	1.34
				52	517							27.28	1.49
				59	455							24.00	1.65
				63	430	22.66	1.71						
				74	366	19.30	1.95						
				81	333	17.54	2.1						
				93	288	15.19	2.3						
				107	251	13.22	2.5						
				116	232	12.24	2.1						
				136	198	10.42	2.4						
				150	180	9.47	2.5						
5.0	5366	141.46	1.40	K 107 KF 107 KA 107 KAF107	8	47	574	30.28	0.98	K 57 KF 57 KA 57 KAF57	4		
5.9	4543	119.76	1.66			52	519	27.34	1.09				
6.4	4204	110.83	1.79			59	456	24.05	1.24				
7.1	3768	99.34	2.0			63	431	22.71	1.31				
7.9	3402	89.68	2.2			73	367	19.34	1.47				
6.8	3968	141.46	1.9	K 107 KF 107 KA 107 KAF107	6	81	333	17.57	1.57				
8.0	3360	119.76	2.2										
8.7	3109	110.83	2.4										
9.7	2787	99.34	2.7										

K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数																																						
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole																																						
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p																																						
3.0kW						4.0kW																																											
93	289	15.22	1.74	K 57 KF 57 KA 57 KAF57	4	4.0	8404	351	0.89	K 107R77 KF 107R77 KA 107R77 KAF107R77	4																																						
107	251	13.25	1.9			4.6	7350	307	1.02																																								
119	226	11.92	1.7			5.1	6632	277	1.13																																								
126	214	11.26	1.8			5.8	5818	243	1.29																																								
148	182	9.59	2.1			6.6	5148	215	1.46																																								
163	165	8.71	2.2			7.5	4525	189	1.66																																								
188	143	7.55	2.4			8.5	4022	168	1.68																																								
216	125	6.57	2.6			9.5	3567	149	1.9																																								
73	371	19.58	1.01	K 47 KF 47 KA 47 KAF47	4	11	3232	135	2.1			K 97R57	4																																				
84	320	16.86	1.12			7.1	5032	199	0.80			KF 97R57	4																																				
90	301	15.86	1.19							KA 97R57	4																																						
104	259	13.65	1.31							KAF97R57	4																																						
116	231	12.19	1.42							5.3	6825	134.94	1.8	K 127	8																																		
121	223	11.77	1.18			KF 127	8																																										
134	200	10.56	1.31			KA 127	8																																										
156	173	9.1	1.53			KAF127	8																																										
166	162	8.56	1.56			6.6	5464	146.07	2.2	K 127	6																																						
193	140	7.36	1.68							KF 127	6																																						
216	125	6.58	1.81							KA 127	6																																						
244	110	5.81	1.96							KAF127	6																																						
159	169	8.91	0.89	K 37 KF 37 KA 37 KAF37	4	6.4	5605	110.83	1.34	K 107	8																																						
178	151	7.96	0.97							KF 107	8																																						
209	129	6.8	1.09							KA 107	8																																						
223	121	6.37	1.13							KAF107	8																																						
265	102	5.36	1.29			8.7	4120	81.46	1.83	6.8	5309	141.93	1.42	K 107	6																																		
4.0kW						8.0	4473	119.58	1.68					KF 107	6																																		
1.7	19697	825	2.4	K 187R107	4	8.7	4146	110.83	1.81					KA 107	6																																		
2.8	12272	514	3.8	KA 187R107	4	11	3354	89.68	2.2					KAF107	6																																		
0.57	59473	2510	0.79	K 187R97 KA 187R97	4	10	3527	141.46	2.1					12	2986	119.76	2.5	K 107	4																														
0.63	53547	2268	0.88							13	2764	110.83	2.7							K 107	4																												
0.70	48494	2054	0.97																			14	2477	99.34	3.0	KF 107	4																						
0.79	42993	1821	1.09																									16	2236	89.68	3.4	KA 107	4																
0.90	37894	1605	1.24																															18	2031	81.46	3.7	KAF107	4										
1.0	32936	1395	1.43																																					20	1802	72.27	4.2						
1.2	28237	1196	1.66																																									10	3498	140.28	1.16	K 97	4
1.4	24696	1046	1.90																																														
1.5	22240	942	2.1			14	2588	103.78	1.56					KA 97	4																																		
1.0	33101	1402	0.91	15	2414					96.80	1.67	KAF97	4																																				
1.1	30480	1291	0.99													17	2157	86.52	1.87																														
1.3	25994	1101	1.16																	18	1942	77.89	2.1																										
1.5	22288	944	1.35																					20	1759	70.54	2.3																						
1.7	19903	843	1.51																									13	2872	115.16	0.88	K 87	4																
1.9	17873	757	1.68																															14	2561	102.71	0.99	KF 87	4										
2.3	14874	630	2.0																																					17	2153	86.34	1.18	KA 87	4				
1.7	20163	854	0.84			18	1978	79.34	1.28					KAF87	4																																		
1.9	17849	756	0.95	20	1757					70.46	1.44																																						
2.5	13339	565	1.27									23	1571			63.00	1.62																																
2.9	11876	503	1.42															25	1412	56.64	1.80																												
3.3	10223	433	1.66																			29	1226	49.16	2.1																								
2.7	12655	536	0.97																							33	1098	44.02	2.3																				
3.0	11167	473	1.09																											39	911	36.52	2.8																
3.4	9869	418	1.24																															K 127R87	4														
3.9	8665	367	1.41			KF 127R87	4																																										
4.3	7901	330	1.55	KA 127R87	4																																												
4.9	6943	290	1.76					KAF127R87	4																																								
5.6	6057	253	2.0							2.4	14341	599	0.85	K 127R77	4																																		
2.4	14341	599	0.85													K 127R77	4																																
2.6	12905	539	0.95															KF 127R77	4																														
3.0	11205	468	1.09																	KA 127R77	4																												
3.5	9816	410	1.24																			KAF127R77	4																										

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
4.0kW						5.5kW							
22	1615	64.75	0.90	K 77 KF 77 KA 77 KAF77	4	3.4	13570	418	0.90	K 127R87 KF 127R87 KA 127R87 KAF127R87	4		
25	1455	58.34	1.00			3.9	11914	367	1.03				
28	1276	51.18	1.14			4.4	10713	330	1.14				
32	1126	45.16	1.29			5.0	9414	290	1.30				
36	998	40.04	1.46			5.7	8213	253	1.49				
38	957	38.39	1.52			6.7	6980	215	1.75				
41	878	35.20	1.66			7.1	6590	203	1.71	K 107R77 KF 107R77 KA 107R77 KAF107R77	4		
47	770	30.89	1.89			8.6	5454	168	2.1				
49	730	29.27	2.0			9.7	4805	148	2.3				
56	639	25.62	2.3			6.7	6980	215	1.08				
62	576	23.08	2.5			7.6	6136	189	1.23				
71	505	20.25	2.9			8.6	5454	168	1.38				
48	754	30.22	1.02	K 67 KF 67 KA 67 KAF67	4	9.7	4837	149	1.55	K 157 KF 157 KA 157 KAF157	8		
53	680	27.28	1.13			11	4383	135	1.72				
60	598	24.00	1.26			4.8	10288	150.03	1.64				
64	565	22.66	1.30			5.9	8423	122.83	2.0				
75	481	19.30	1.48			7.2	6833	99.65	2.5				
82	437	17.54	1.59			7.8	6338	92.42	2.7				
95	379	15.19	1.74			5.3	9253	134.94	1.3	K 127 KF 127 KA 127 KAF127	8		
109	330	13.22	1.91			5.9	8399	122.60	1.5				
118	305	12.24	1.63			6.5	7556	110.13	1.6				
138	260	10.42	1.81			8.1	6143	89.43	2.0				
152	236	9.47	1.91			7.1	6940	134.94	1.76	K 127 KF 127 KA 127 KAF127	6		
176	204	8.20	2.02			7.8	6299	122.60	1.94				
202	178	7.14	2.2			8.7	5667	110.13	2.2				
60	600	24.05	0.94	11	4599	89.43	2.7						
63	566	22.71	1.00	K 57 KF 57 KA 57 KAF57	4	8.7	5700	110.83	1.32	K 107 KF 107 KA 107 KAF107	6		
74	482	19.34	1.12			9.7	5109	99.34	1.47				
82	438	17.57	1.19			11	4612	89.68	1.63				
95	380	15.22	1.33			12	4190	81.46	1.79				
109	330	13.25	1.45			10	4866	141.93	1.55	K 107 KF 107 KA 107 KAF107	4		
121	297	11.92	1.31			12	4100	119.58	1.83				
128	281	11.26	1.39			13	3800	110.83	1.98				
150	239	9.59	1.59			14	3406	99.34	2.2				
165	217	8.71	1.69			16	3075	89.68	2.4				
191	188	7.55	1.82			18	2793	81.46	2.7	K 97 KF 97 KA 97 KAF97	4		
219	164	6.57	1.98			12	4273	124.61	0.95				
5.5kW						14	3558	103.78	1.14				
0.79	59116	1821	0.80			K 187R97 KA 187R97	4	15	3319			96.80	1.22
0.90	52104	1605	0.90	17	2967			86.52	1.36				
1.0	45286	1395	1.04	18	2671			77.89	1.51				
1.2	38826	1196	1.21	20	2419			70.54	1.67				
1.4	33957	1046	1.38	23	2145			62.55	1.88				
1.5	30580	942	1.54	25	1939			56.55	2.1				
2.0	23926	737	2.0	30	1643			47.93	2.5				
2.3	20095	619	2.3	17	2960			86.34	1.37				
1.31	35742	1101	0.84	K 167R97 KA 167R97	4	18	2720	79.34	1.49				
1.5	30645	944	0.98			20	2416	70.46	1.67				
1.7	27367	843	1.10			23	2160	63.00	1.87				
1.9	24575	757	1.22			25	1942	56.64	2.1				
2.3	20452	630	1.47			29	1686	49.16	1.51				
2.6	18212	561	1.65			33	1509	44.02	1.68				
3.0	15550	479	1.93			39	1252	36.52	2.0				
3.4	13700	422	2.2			46	1076	31.39	2.4				
2.2	21458	661	0.79	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	52	956	27.88	2.7				
2.5	18342	565	0.92			32	1548	45.16	0.94				
2.9	16329	503	1.04			36	1373	40.04	1.06				
3.3	14057	433	1.20			47	1059	30.89	1.38				
3.8	12271	378	1.38			49	1004	29.27	1.45				
4.3	10778	332	1.57			56	878	25.62	1.66				

K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数									
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole									
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p									
5.5kW						7.5kW														
62	791	23.08	1.84	K 77 KF 77 KA 77 KAF77	4	6.4	10522	150.03	1.6	K 157 KF 157 KA 157 KAF157	6									
71	694	20.25	2.0			7.8	8614	122.83	2.0											
81	613	17.87	2.2			9.6	6989	99.65	2.4											
91	543	15.84	2.4			10	6482	92.42	2.6											
107	464	13.52	2.5			12	5593	79.75	3.0											
117	424	12.36	2.6			7.1	9464	134.94	1.29	K 127	6									
133	371	10.81	2.7			7.8	8590	122.48	1.42	KF 127	6									
60	823	24.00	0.91	K 67 KF 67 KA 67 KAF67	4	8.7	7727	110.18	1.58	KA 127	6									
	64	777	22.66			0.94	11	6272	89.43	1.95	KAF127	6								
	75	662	19.30			1.08	10	6736	146.07	1.81	K 127 KF 127 KA 127 KAF127	4								
	82	601	17.54			1.16		11	6223	134.94			1.96							
	95	521	15.19			1.26		12	5648	122.60			2.2							
	109	453	13.22			1.39		13	5081	110.13			2.4							
	118	420	12.24			1.39		16	4124	89.43			3.0							
	138	357	10.42			1.32		18	3805	82.52			3.2							
	152	325	9.47			1.39		21	3272	70.95			3.7							
	176	281	8.20			1.47		10	6545	141.93			1.15	K 107 KF 107 KA 107 KAF107	4					
	202	245	7.14			1.61	12		5514	119.58	1.36									
82	602	17.57	0.87	13	5111	110.83	1.47		K 97 KF 97 KA 97 KAF97	4										
	95	522	15.22	0.96	15	4581	99.34				1.64									
	109	454	13.25	0.97	16	4136	89.68				1.82									
	121	409	11.92	1.01	18	3757	81.46				2.00									
	128	386	11.26	1.06	20	3333	72.27				2.3									
	150	329	9.59	1.16	22	3024	65.58				2.5									
	165	299	8.71	1.23	26	2599	56.37				2.9									
	191	259	7.55	1.33	30	2269	49.20				3.2									
	219	225	6.57	1.44	35	1925	41.74				3.6									
	1.8	36021	825	1.30	K 187R107 KA 187R107	4	40	1682			36.48	4.0	15	4464	96.80	0.91	K 87 KF 87 KA 87 KAF87	4		
2.0		31437	720	1.50			17	3990	86.52	1.01										
2.4		26808	614	1.75			19	3592	77.89	1.13										
1.2		52220	1196	0.90	K 187R97 KA 187R97	4	21	3253	70.54	1.24	23	2884		62.55	1.40					
		1.4	45670	1046			1.03	26	2608	56.55		1.55		K 77 KF 77 KA 77 KAF77	4					
		1.5	41129	942			1.14	30	2210	47.93		1.83								
		2.0	32179	737			1.46	35	1931	41.87		2.1								
		2.4	27027	619			1.74	38	1766	38.30		2.3								
		2.8	22879	524			2.1	43	1579	34.23		2.6								
		1.7	36807	843			0.82	K 167R97 KF 167R97 KA 167R97 KAF167R97	4	23		2905				63.00			0.87	47
1.9			33052	757	0.91	26	2612			56.64	0.97	50				1350			29.27	
2.3	27507		630	1.09	30	2267	49.16			1.12	57		1181	25.62	1.23					
2.6	24494		561	1.23	33	2030	44.02			1.20			63	1064	23.08	1.37				
3.0	20914		479	1.44	40	1684	36.52			1.40				72	934	20.25	1.56			
3.5	18425		422	1.63	47	1448	31.39			1.75					82	824	17.87	1.65		
4.0	16024		367	1.88	52	1286	27.88			1.90						92	730	15.84	1.80	
3.4	18906		433	0.89	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	59			1149							24.92	2.0	108	
	3.9	16504	378	1.03			65	1033	22.41	2.1							118	570		12.36
	4.4	14496	332	1.17			75	897	19.45	2.4		135						499		10.81
	5.0	12662	290	1.34			84	803	17.42	2.6	153							440		9.54
	4.4	14408	330	0.85			K 127R87 KF 127R87 KA 127R87 KAF127R87	4	92	736			15.95					2.3		173
5.0		12662	290	0.97	101	666			14.45	3.0			202	333				7.22	2.3	
5.8		11046	253	1.11	47	1424			30.89	1.02				K 77 KF 77 KA 77 KAF77	4					
6.8		9387	215	1.30		50			1350	29.27		1.08								
7.2		8863	203	1.38		57			1181	25.62	1.23									
8.7		7335	168	1.67		63			1064	23.08	1.37									
9.9	6462	148	1.89	72		934	20.25	1.56												
4.4	15382	164.44	2.0	K 167 KA 167		8	82	824	17.87	1.65	92	730	15.84			1.80				
	5.3	12623	135.38		2.4		108	623	13.52	1.82										
5.8	11537	164.44	2.61	K 167 KA 167	6	118	570	12.36	1.89	135	499	10.81	1.95							
	7.1	9467	135.38			3.18	153	440	9.54		2.0									

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数								
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole								
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p								
11kW						11kW													
1.8	52831	825	0.89	K 187R107 KA 187R107	4	20	4888	72.27	1.54	K 107 KF 107 KA 107 KAF107	4								
2.0	46107	720	1.02			22	4435	65.58	1.70										
2.4	39319	614	1.20			26	3813	56.37	1.97										
2.8	32915	514	1.43			30	3328	49.2	2.2										
3.3	28753	449	1.63			35	2823	41.74	2.5										
4.0	23374	365	2.0			40	2467	36.48	2.7										
2.0	47196	737	1.00	K 187R97 KA 187R97	4	21	4771	70.54	0.85	K 97 KF 97 KA 97 KAF97	4								
2.4	39639	619	1.19			23	4231	62.55	0.96										
2.8	33556	524	1.40			26	3825	56.55	1.06										
4.7	20044	313	1.50	K 167R107 KA 167R107	4	30	3242	47.93	1.25										
5.3	17482	273	1.72			35	2832	41.87	1.43										
5.8	16009	250	1.88			38	2590	38.3	1.56										
6.7	13960	218	2.2			43	2315	34.23	1.75										
7.2	13000	203	2.3			47	2085	30.82	1.94										
2.6	35925	561	0.84	K 167R97 KA 167R97	4	52	1888	27.91	2.1			K 87 KF 87 KA 87 KAF87	4						
3.0	30674	479	0.98			59	1674	24.75	2.4										
3.5	27024	422	1.11			65	1513	22.37	2.7										
4.0	23502	367	1.28			33	2977	44.02	0.82										
4.4	21260	332	0.80	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	40	2470	36.52	0.95	K 77 KF 77 KA 77 KAF77	4								
5.0	18571	290	0.91			47	2123	31.39	1.20										
6.8	13768	215	0.89			52	1886	27.88	1.30										
7.2	13000	203	0.94	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	59	1685	24.92	1.39					K 87 KF 87 KA 87 KAF87	4				
8.7	10758	168	1.14			65	1516	22.41	1.43										
9.9	9478	148	1.29			75	1315	19.45	1.64										
5.4	18313	135.38	1.64			84	1178	17.42	1.76										
6.6	14932	110.38	2.0	K 167 KA 167	8	92	1079	15.95	1.57							K 87 KF 87 KA 87 KAF87	4		
5.9	16740	164.44	1.80			101	977	14.45	1.9										
7.2	13782	135.38	2.2	K 167 KA 167	6	116	849	12.56	2.0									K 77 KF 77 KA 77 KAF77	4
8.9	11122	164.44	2.7			131	753	11.13	2.1										
11	9158	135.38	3.3	K 157 KF 157 KA 157 KAF157	8	147	674	9.96	2.2			K 77 KF 77 KA 77 KAF77	4						
5.9	16615	122.83	1.02			177	559	8.27	2.4										
7.3	13480	99.65	1.26			203	486	7.19	2.5										
7.9	12502	92.42	1.35			63	1561	23.08	0.93										
9.1	10788	79.75	1.57	K 157 KF 157 KA 157 KAF157	8	72	1370	20.25	1.03										
6.5	15273	150.03	1.11			82	1209	17.87	1.13										
7.9	12504	122.83	1.35			92	1071	15.84	1.23										
9.7	10144	99.65	1.67	K 157 KF 157 KA 157 KAF157	8	108	914	13.52	1.38	K 77 KF 77 KA 77 KAF77	4								
10	9408	92.42	1.80			118	836	12.36	1.12										
12	8119	79.75	2.1			135	731	10.81	1.27										
9.7	10147	150.03	1.67			153	645	9.54	1.37										
12	8308	122.83	2.0	K 157 KF 157 KA 157 KAF157	4	173	572	8.46	1.46					K 167R107 KA 167R107	4				
15	6740	99.65	2.5			202	488	7.22	1.57										
16	6251	92.42	2.7			15kW													
11	9127	134.94	1.34			K 157 KF 157 KA 157 KAF157	4	2.4	53617							614	0.88	K 187R107 KA 187R107	4
12	8295	122.60	1.47	2.8	44884			514	1.05										
13	7449	110.13	1.64	3.3	39208			449	1.20										
16	6049	89.43	2.0	4.0	31873			365	1.47										
18	5581	82.52	2.2	K 127 KF 127 KA 127 KAF127	4	5.4	23403	268	2.0	K 167R107 KA 167R107	4								
21	4799	70.95	2.5			4.7	27332	313	1.10										
13	7496	110.83	1.00			5.3	23839	273	1.26										
15	6719	99.34	1.12			5.8	21831	250	1.38										
16	6066	89.68	1.24	6.7	19037	218	1.58												
18	5510	81.46	1.36	7.2	17727	203	1.70												
				7.9	16155	185	1.86												
				9.0	14234	163	2.1												
				6.2	20696	237	0.82	K 157R107 KF 157R107 KA 157R107 KAF157R107	4										
				7.0	18338	210	0.92												
				7.9	16068	184	1.05												
				9.4	13535	155	1.25												
				12	11003	126	1.54												
				13	9606	110	1.76												

K

K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
15kW						18kW					
5.4	25096	180.78	1.87	K 187	6	2.9	54981	514	0.85	K 187R107 KA 187R107	4
6.0	22285	160.53	2.1	KA 187	6	3.3	48028	449	0.98		
7.2	18793	135.38	1.60	K 167	6	4.0	39043	365	1.20		
8.8	15324	110.39	1.96	KA 167	6	5.5	28667	268	1.64		
						6.5	24281	227	1.9		
8.9	15166	164.44	1.12	K 167	4	4.7	33481	313	0.90	K 167R107 KA 167R107	4
11	12486	135.38	1.36	KA 167	4	5.4	29202	273	1.03		
7.9	16990	122.39	1.00	K 157	6	5.9	26742	250	1.12		
9.7	13833	99.65	1.22	KF 157	6	6.7	23319	218	1.29		
10	12830	92.42	1.32	KA 157	6	7.2	21714	203	1.39		
12	11071	79.75	1.53	KA 157	6	7.9	19789	185	1.52		
14	9770	70.35	1.73	KAF157	6	9.0	17436	163	1.73		
						11	14868	139	2.0		
						12	12943	121	2.3		
9.7	13837	150.03	1.22	K 157	4	8.0	19682	184	0.86	K 157R107	4
12	11329	122.83	1.49	KF 157	4	9.5	16580	155	1.02	KF 157R107	4
15	9191	99.65	1.84	KA 157	4	12	13478	126	1.26	KA 157R107	4
16	8524	92.42	2.0	KAF157	4	13	11766	110	1.44	KAF157R107	4
18	7355	79.75	2.3								
11	12445	134.94	0.97	K 127 KF 127 KA 127 KAF127	4	5.4	30951	180.78	1.52	K 187 KA 187	6
12	11307	122.60	1.08			6.0	27484	160.53	1.71		
13	10157	110.13	1.20			6.7	24745	144.53	1.9		
16	8248	89.43	1.48			7.4	22317	130.35	2.1		
18	7611	82.52	1.61			8.1	20424	180.78	2.3	K 187 KA 187	4
21	6544	70.95	1.87			9.2	18136	160.53	2.6		
23	5774	62.60	2.1			10	16328	144.53	2.9		
27	4987	54.07	2.5			11	14726	130.35	3.2		
31	4410	47.82	2.8								
16	8271	89.68	0.91	K 107 KF 107 KA 107 KAF107	4	11	15195	134.5	1.98	K 167 KA 167	4
18	7513	81.46	1.00			13	12471	110.39	2.4		
20	6665	72.27	1.13			17	9851	87.20	3.1		
22	6048	65.58	1.24			10	17061	99.65	0.99	K 157 KF 157 KA 157 KAF157	6
26	5199	56.37	1.45			11	15823	92.42	1.08		
30	4538	49.2	1.62			12	13654	79.75	1.24		
35	3850	41.74	1.80			14	12050	70.38	1.4		
40	3365	36.48	2.0			12	13827	122.39	1.22	K 157 KF 157 KA 157 KAF157	4
45	2972	32.22	2.2			15	11258	99.65	1.50		
47	2844	30.84	2.3			16	10441	92.42	1.62		
51	2637	28.59	2.6			18	9010	79.75	1.88		
30	4421	47.93	0.91	K 97 KF 97 KA 97 KAF97	4	21	7951	70.38	2.1		
35	3862	41.87	1.05			24	6894	61.02	2.5		
38	3532	38.3	1.14			27	6133	54.29	2.8		
43	3157	34.23	1.28			31	5286	46.79	3.2		
47	2843	30.82	1.42			39	4295	38.02	3.9		
52	2574	27.91	1.57			13	12442	110.13	0.98	K 127 KF 127 KA 127 KAF127	4
59	2283	24.75	1.77			16	10103	89.43	1.21		
65	2063	22.37	1.96			18	9323	82.52	1.31		
77	1749	18.96	2.3			21	8016	70.95	1.52		
88	1527	16.56	2.6			23	7072	62.60	1.73		
47	2895	31.39	0.88	K 87 KF 87 KA 87 KAF87	4	27	6109	54.07	2.0		
52	2571	27.88	0.99			31	5403	47.82	2.3		
59	2298	24.92	1.10			37	4540	40.19	2.7		
65	2067	22.41	1.23			41	4121	36.48	3.0		
75	1794	19.45	1.37			47	3544	31.36	3.4		
84	1607	17.42	1.41			53	3127	27.67	3.9		
92	1471	15.95	1.48			20	8165	72.27	0.92	K 107 KF 107 KA 107 KAF107	4
101	1333	14.45	1.5			22	7409	65.58	1.01		
116	1158	12.56	1.53			26	6368	56.37	1.18		
131	1027	11.13	1.58			30	5558	49.2	1.35		
147	919	9.96	1.73			35	4716	41.74	1.47		
177	763	8.27	1.84			40	4121	36.48	1.64		
203	663	7.19	2.2								

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
18.5kW						22kW					
46	3640	32.22	1.86	K 107 KF 107 KA 107 KAF107	4	9.7	20289	99.65	0.83	K 157	6
48	3484	30.84	1.88			11	18817	92.42	0.90	KF 157	6
51	3230	28.59	2.1			12	16237	79.75	1.04	KA 157	6
57	2931	25.94	2.3			14	14330	70.38	1.18	KAF157	6
66	2519	22.30	2.7			16	12424	61.02	1.36		
76	2199	19.46	3.1			12	16502	122.83	1.03		
89	1865	16.51	3.6			15	13388	99.65	1.26		
						16	12417	92.42	1.36	K 157	4
35	4730	41.87	0.85			18	10714	79.75	1.58	KF 157	4
48	3482	30.82	1.16	K 97	4	21	9456	70.38	1.79	KA 157	4
53	3153	27.91	1.28	KF 97	4	24	8198	61.02	2.1	KAF157	4
59	2796	24.75	1.45	KA 97	4	27	7294	54.29	2.3		
66	2527	22.37	1.60	KAF97	4	31	6286	46.79	2.7		
78	2142	18.96	1.9			39	5108	38.02	3.3		
89	1871	16.56	2.2								
106	1565	13.85	2.6			16	12015	89.43	1.02		
123	1355	11.99	2.7			18	11087	82.52	1.10		
						21	9532	70.95	1.28		
59	2815	24.92	0.83			23	8410	62.60	1.45	K 127	4
66	2532	22.41	0.85			27	7264	54.07	1.68	KF 127	4
76	2197	19.45	0.98	K 87	4	31	6425	47.82	1.90	KA 127	4
84	1968	17.42	1.05	KF 87	4	37	5400	40.19	2.3	KAF127	4
102	1633	14.45	1.12	KA 87	4	40	4901	36.48	2.5		
117	1419	12.56	1.21	KAF87	4	47	4215	31.36	2.9		
132	1257	11.13	1.25			53	3719	27.67	3.3		
148	1125	9.96	1.32			61	3212	23.90	3.8		
178	934	8.27	1.41			70	2841	21.14	4.3		
204	812	7.19	1.50								
22kW						22kW					
3.3	57114	449	0.82	K 187R107 KA 187R107	4	26	7573	56.37	0.99		
4.0	46429	365	1.01			30	6610	49.20	1.11		
5.5	34091	268	1.38			35	5608	41.74	1.23		
6.5	28875	227	1.63			40	4901	36.48	1.38		
7.4	25313	199	1.86			46	4329	32.22	1.56		
8.8	21370	168	2.2			48	4143	30.84	1.54	K 107	4
						51	3841	28.59	1.76	KF 107	4
5.4	34727	273	0.87			57	3485	25.94	1.94	KA 107	4
5.9	31801	250	0.95			66	2996	22.30	2.2	KAF107	4
6.7	27730	218	1.08	K 167R107	4	76	2614	19.46	2.3		
7.2	25822	203	1.16	KA 167R107	4	89	2218	16.51	2.6		
7.9	23533	185	1.28			102	1939	14.43	2.6		
9.0	20734	163	1.45			109	1815	13.51	2.9		
11	17681	139	1.70			125	1584	11.79	3.0		
12	15392	121	2.0			147	1343	10	3.3		
9.5	19717	155	0.86	K 157R107	4	48	4141	30.82	0.98		
12	16028	126	1.06	KF 157R107	4	53	3750	27.91	1.08		
13	13992	110	1.21	KA 157R107	4	59	3325	24.75	1.22		
				KAF157R107	4	66	3005	22.37	1.34	K 97	4
						78	2547	18.96	1.59	KF 97	4
5.4	36807	180.78	1.28			89	2225	16.56	1.82	KA 97	4
6.0	32684	160.53	1.44			106	1861	13.85	1.87	KAF97	4
6.7	29427	144.53	1.60	K 187	6	123	1611	11.99	2.1		
7.4	26540	130.35	1.77	KA 187	6	137	1439	10.71	2.2		
8.6	23044	113.18	2.0			164	1202	8.95	2.3		
8.1	24288	180.78	1.94			76	2613	19.45	0.83		
9.2	21567	160.53	2.2	K 187	4	84	2340	17.42	0.88	K 87	4
10	19418	144.53	2.4	KA 187	4	102	1941	14.45	0.94	KF 87	4
11	17512	130.35	2.7			117	1687	12.56	1.02	KA 87	4
						132	1495	11.13	1.05	KAF87	4
						148	1338	9.96	1.11		
11	18070	134.5	1.66			178	1111	8.27	1.18		
13	14831	110.39	2.0	K 167	4	204	966	7.19	1.27		
17	11715	87.20	2.6	KA 167	4						
19	10460	77.86	2.9								

K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
30kW						37kW					
5.5	49099	268	0.96	K 187R107 KA 187R107	4	5.5	56947	268	0.83	K 187R107 KA 187R107	4
6.5	41587	227	1.13		4	6.5	48235	227	0.97		4
7.4	36458	199	1.29		4	7.4	42285	199	1.11		4
8.8	30778	168	1.5		4	8.8	35698	168	1.32		4
6.7	39938	218	0.75	K 167R107 KA 167R107	4	8.0	39310	185	0.77	K 167R107 KA 167R107	4
7.2	37190	203	0.81		4	9.1	34635	163	0.87		4
7.9	33893	185	0.89		4	11	29536	139	1.02		4
9.0	29862	163	1.01		4	12	25711	121	1.17		4
11	25465	139	1.18		4	8.2	40572	180.78	1.16	K 187 KA 187	4
12	22168	121	1.36	K 187 KA 187	4	8.9	37268	166.06	1.26		4
8.1	33120	180.78	1.42		4	10	32436	144.53	1.45		4
8.9	30423	166.06	1.54		4	11	29395	130.98	1.60		4
10	26478	144.53	1.78		4	13	25400	113.18	1.85		4
11	23996	130.98	1.96		4	14	23046	102.69	2.0		4
13	20735	113.18	2.3		4	17	19853	88.46	2.4		4
14	18813	102.69	2.5	K 167 KA 167	4	14	24559	109.43	1.22	K 167 KA 167	4
17	16206	88.46	2.9		4	17	19646	87.54	1.53		4
13	20048	109.43	1.50		4	19	17828	78.44	1.69		4
17	15975	87.20	1.88		4	22	15301	68.18	2.0		4
19	14554	79.44	2.1		4	24	13582	60.52	2.2	K 157 KF 157 KA 157 KAF157	4
22	12427	67.83	2.4	K 157 KF 157 KA 157 KAF157	4	35	9592	42.74	3.1		4
24	11088	60.52	2.7		4	16	20741	92.42	0.82		4
15	18256	99.65	0.93		4	19	17898	79.75	0.95		4
16	16932	92.42	1.00		4	21	15795	70.38	1.07		4
18	14611	79.75	1.16		4	24	13694	61.02	1.24		4
21	12894	70.38	1.31		4	27	12184	54.29	1.39		4
24	11179	61.02	1.51	K 127 KF 127 KA 127 KAF127	4	32	10501	46.79	1.61		4
27	9946	54.29	1.70		4	39	8533	38.02	1.98	K 127 KF 127 KA 127 KAF127	4
31	8572	46.79	1.97		4	47	7025	31.30	2.4		4
39	6965	38.02	2.4		4	24	14049	62.60	0.87		4
47	5734	31.30	3.0		4	27	12135	54.07	1.01		4
21	12998	70.95	0.94		4	31	10732	47.82	1.14		4
23	11469	62.60	1.07		4	37	9020	40.19	1.35		4
27	9906	54.07	1.23	K 107 KF 107 KA 107 KAF107	4	41	8187	36.48	1.49		4
31	8761	47.82	1.39		4	47	7040	31.36	1.74		4
37	7363	40.19	1.66		4	53	6212	27.67	1.97		4
40	6683	36.48	1.83		4	62	5366	23.90	2.3		4
47	5747	31.36	2.1		4	70	4747	21.14	2.6		4
53	5071	27.67	2.4		4	83	3988	17.77	2.8	K 107 KF 107 KA 107 KAF107	4
61	4380	23.90	2.8		4	103	3220	14.35	3.1		4
35	7647	41.74	0.90	K 97 KF 97 KA 97 KAF97	4	116	2870	12.78	3.1		4
40	6683	36.48	1.01		4	138	2410	10.74	3.5		4
46	5903	32.22	1.08		4	171	1948	8.68	3.5		4
51	5238	28.59	1.29		4	41	8187	36.48	0.83	K 107 KF 107 KA 107 KAF107	4
57	4752	25.94	1.42		4	48	6921	30.84	0.92		4
66	4085	22.30	1.63		4	52	6416	28.59	1.05		4
76	3565	19.46	1.66		4	57	5822	25.94	1.16		4
89	3025	16.51	1.87		4	66	5005	22.3	1.33		4
102	2644	14.43	1.90		4	76	4367	19.46	1.35		4
109	2475	13.51	2.15	K 97 KF 97 KA 97 KAF97	4	90	3705	16.51	1.53		4
125	2160	11.79	2.19		4	103	3238	14.43	1.55		4
147	1832	10.00	2.39		4	110	3032	13.51	1.75	K 97 KF 97 KA 97 KAF97	4
168	1601	8.74	2.45		4	126	2646	11.79	1.79		4
59	4534	24.75	0.89		4	148	2244	10.00	1.82		4
66	4098	22.37	0.99		4	169	1961	8.74	1.95		4
78	3474	18.96	1.16		4						
89	3034	16.56	1.33		4						
106	2537	13.85	1.59		4						
123	2197	11.99	1.66		4						
137	1962	10.71	1.37		4						
164	1640	8.95	1.52		4						

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole	
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p	
45kW						55kW						
6.5	58664	227	0.80	K 187R107 KA 187R107	4	17	29204	87.54	1.03	K 167 KA 167	4	
7.4	51428	199	0.91		4	19	25974	77.86	1.16		4	
8.8	43416	168	1.08		4	22	22745	68.18	1.32		4	
11	35922	139	0.84	K 167R107	4	24	20263	60.74	1.48		K 157 KF 157 KA 157 KAF157	4
12	31270	121	0.96	KA 167R107	4	29	17207	51.58	1.75			4
8.2	49344	180.78	0.95	K 187 KA 187	4	35	14258	42.74	2.1	4		
8.9	45326	166.06	1.04		4	41	12170	36.48	2.5	4		
10	39449	144.53	1.19		4	24	20357	61.02	0.83	K 127 KF 127 KA 127 KAF127	4	
11	35751	130.98	1.31		4	27	18111	54.29	0.93		4	
13	30892	113.18	1.52		4	32	15609	46.79	1.08		4	
14	28029	102.69	1.68		4	39	12684	38.02	1.33		4	
17	24145	88.46	1.9		4	47	10442	31.30	1.62		4	
20	20291	74.34	2.3		4	54	9214	27.62	1.84		4	
14	29869	109.43	1.01	K 167 KA 167	4	62	7990	23.95	2.1		4	
17	23894	87.54	1.26		4	69	7109	21.31	2.4		4	
19	21683	79.44	1.42		4	81	6128	18.37	2.8		4	
22	18610	68.18	1.62		4	99	4977	14.92	3.4		4	
24	16519	60.52	1.82		4	117	4220	12.65	3.8		4	
29	14079	51.58	2.1		4	37	13408	40.19	0.91	K 157 KF 157 KA 157 KAF157	4	
35	11666	42.74	2.6		4	47	10465	31.36	1.17		4	
21	19210	70.38	0.88	K 157 KF 157 KA 157 KAF157	4	53	9234	27.67	1.32		4	
24	16655	61.02	1.02		4	62	7976	23.90	1.53		4	
27	14818	54.29	1.14		4	70	7056	21.14	1.73		4	
32	12771	46.79	1.32		4	83	5928	17.77	2.06		4	
39	10378	38.02	1.63		4	103	4787	14.35	2.38		4	
47	8543	31.30	2.0		4	116	4267	12.78	1.88		4	
54	7539	27.62	2.2		4	138	3583	10.74	2.1		4	
62	6537	23.95	2.6		4	171	2896	8.68	2.3		4	
69	5817	21.31	2.9		4	75kW						
81	5014	18.37	3.4		4	11	59298	130.35	0.79	K 187 KA 187	4	
31	13052	47.82	0.94	K 127 KF 127 KA 127 KAF127	4	13	52224	114.80	0.90		4	
37	10970	40.19	1.11		4	14	47016	103.35	1.00		4	
41	9957	36.48	1.23		4	17	40242	88.46	1.17		4	
47	8562	31.36	1.43		4	20	33818	74.34	1.39		4	
53	7555	27.67	1.62		4	23	29283	64.37	1.61		4	
62	6526	23.90	1.87		4	28	24402	53.64	1.9		4	
70	5773	21.14	2.1		4	32	20803	45.73	2.3		4	
83	4850	17.77	2.3		4	19	35420	77.86	0.85	K 167 KA 167	4	
103	3917	14.35	2.5		4	22	30857	67.83	0.97		4	
116	3491	12.78	2.6		4	24	27531	60.52	1.09		4	
138	2931	10.74	2.8		4	29	23496	51.65	1.28		4	
171	2369	8.68	2.9		4	34	19598	43.08	1.53		4	
52	7804	28.59	0.87	K 107 KF 107 KA 107 KAF107	4	41	16595	36.48	1.81		4	
57	7080	25.94	0.96		4	46	14616	32.13	2.1		4	
66	6087	22.30	1.10		4	52	13042	28.67	2.3		4	
76	5312	19.46	1.11		4	61	11114	24.43	2.7		4	
90	4506	16.51	1.26		4	39	17296	38.02	0.98	K 157 KF 157 KA 157 KAF157	4	
103	3939	14.43	1.44		4	47	14239	31.30	1.19		4	
110	3688	13.51	1.47		4	54	12565	27.62	1.35		4	
126	3218	11.79	1.55		4	62	10895	23.95	1.55		4	
148	2729	10.00	1.60		4	69	9694	21.31	1.75		4	
169	2386	8.74	1.64		4	81	8357	18.37	2.0		4	
55kW						99	6787	14.92	2.5		4	
10	45904	145.33	1.02	K 187 KA 187	4	117	5755	12.65	2.9		4	
11	41371	130.98	1.14		4	47	14271	31.36	0.86	K 127 KF 127 KA 127 KAF127	4	
13	36261	114.80	1.30		4	53	12592	27.67	0.97		4	
14	32436	102.69	1.45		4	62	10877	23.90	1.12		4	
17	29511	88.46	1.59		4	70	9621	21.14	1.27		4	
20	24800	74.34	1.90		4	83	8084	17.77	1.36		4	
23	21474	64.37	2.19		4	103	6528	14.35	1.51		4	
						114	5900	12.78	1.54		4	
						138	4886	10.74	1.72		4	
						171	3949	8.68	1.74		4	

K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
90kW						132kW					
14	56058	102.69	0.84	K 187 KA 187	4	20	59121	74.34	0.79	K 187 KA 187	4
16	51134	93.67	0.92			23	51192	64.37	0.92		
19	42242	77.38	1.11			28	42659	53.64	1.10		
23	35139	64.37	1.34			31	38499	48.41	1.22		
28	29282	53.64	1.61			34	34666	43.59	1.36		
31	26427	48.41	1.8			38	30841	38.78	1.52		
34	23796	43.59	2.0			45	26570	33.41	1.77		
38	21170	38.78	2.2			53	22331	28.08	2.1		
22	37028	67.83	0.81	K 167 KA 167	4	61	19333	24.31	2.3	K 167 KA 167	4
24	33038	60.52	0.91			74	16112	20.26	2.6		
29	28157	51.58	1.07			86	13734	17.27	2.8		
35	23332	42.74	1.29			35	33990	42.74	0.88		
40	19953	36.55	1.51			41	29012	36.48	1.04		
45	17807	32.62	1.69			46	25942	32.62	1.16		
52	15651	28.67	1.92			54	22053	27.73	1.36		
61	13336	24.43	2.3			61	19429	24.43	1.55		
73	11054	20.25	2.7	K 157 KF 157 KA 157 KAF157	4	74	16104	20.25	1.87	K 157 KF 157 KA 157 KAF157	4
86	9433	17.28	3.2			86	13742	17.28	2.2		
39	20755	38.02	0.82			62	19047	23.95	0.89		
47	17087	31.30	0.99			70	16947	21.31	1.00		
54	15078	27.62	1.12			81	14609	18.37	1.16		
62	13074	23.95	1.29			100	11866	14.92	1.43		
69	11633	21.31	1.45			118	10060	12.65	1.59		
81	10028	18.37	1.69			160kW					
99	8145	14.92	2.1	K 127 KF 127 KA 127 KAF127	4	28	51708	53.64	0.91	K 187 KA 187	4
117	6906	12.65	2.5			33	44082	45.73	1.07		
62	13052	23.90	0.94			42	34096	35.37	1.38		
70	11546	21.14	1.06			47	30693	31.84	1.53		
83	9701	17.77	1.15			61	23434	24.31	1.9		
103	7834	14.35	1.26			74	19530	20.26	2.1		
116	6982	12.78	1.28			86	16648	17.27	2.3		
138	5863	10.74	1.43			41	35166	36.48	0.86	K 167 KA 167	4
171	4738	8.68	1.45			62	23338	24.21	1.29		
110kW						73	19800	20.54	1.52		
17	58625	88.46	0.80	K 187 KA 187	4	86	16657	17.28	1.81		
20	49267	74.34	0.95			81	17708	18.37	0.96	K 157 KF 157 KA 157 KAF157	4
21	46173	69.67	1.02			100	14382	14.92	1.18		
24	41853	63.14	1.12			118	12194	12.65	1.39		
33	30307	45.73	1.55			200kW					
35	28332	42.75	1.66			33	55103	45.73	0.85	K 187 KA 187	4
38	26178	39.50	1.80			45	40258	33.41	1.17		
42	23441	35.37	2.0			47	38366	31.84	1.23		
53	18610	28.08	2.5			59	30618	25.41	1.54		
29	34184	51.58	0.88	K 167 KA 167	4	74	24413	20.26	1.69		
35	28325	42.74	1.06			86	20810	17.27	1.87		
41	24176	36.48	1.24			61	29437	24.43	1.02	K 167 KA 167	4
46	21618	32.62	1.39			73	24750	20.54	1.22		
54	18378	27.73	1.64			86	20906	17.35	1.44		
61	16191	24.43	1.86			100	17978	14.92	0.94		
74	13420	20.25	2.2			118	15243	12.65	1.05		
86	11452	17.28	2.6			132kW					
60	15872	23.95	1.07	K 157 KF 157 KA 157 KAF157	4	20	59121	74.34	0.79	K 187 KA 187	4
70	14123	21.31	1.20			23	51192	64.37	0.92		
81	12174	18.37	1.39			28	42659	53.64	1.10		
100	9888	14.92	1.71			31	38499	48.41	1.22		
118	8384	12.65	2.0			34	34666	43.59	1.36		
90kW						38	30841	38.78	1.52		
14	56058	102.69	0.84	K 187 KA 187	4	45	26570	33.41	1.77		
16	51134	93.67	0.92			53	22331	28.08	2.1		
19	42242	77.38	1.11			61	19333	24.31	2.3		
23	35139	64.37	1.34			74	16112	20.26	2.6		
28	29282	53.64	1.61			86	13734	17.27	2.8		
31	26427	48.41	1.8			35	33990	42.74	0.88	K 167 KA 167	4
34	23796	43.59	2.0			41	29012	36.48	1.04		
38	21170	38.78	2.2			46	25942	32.62	1.16		
110kW						54	22053	27.73	1.36		
17	58625	88.46	0.80	K 187 KA 187	4	61	19429	24.43	1.55		
20	49267	74.34	0.95			74	16104	20.25	1.87		
21	46173	69.67	1.02			86	13742	17.28	2.2		
24	41853	63.14	1.12			62	19047	23.95	0.89	K 157 KF 157 KA 157 KAF157	4
33	30307	45.73	1.55			70	16947	21.31	1.00		
35	28332	42.75	1.66			81	14609	18.37	1.16		
38	26178	39.50	1.80			100	11866	14.92	1.43		
42	23441	35.37	2.0			118	10060	12.65	1.59		
53	18610	28.08	2.5			160kW					
29	34184	51.58	0.88	K 167 KA 167	4	28	51708	53.64	0.91	K 187 KA 187	4
35	28325	42.74	1.06			33	44082	45.73	1.07		
41	24176	36.48	1.24			42	34096	35.37	1.38		
46	21618	32.62	1.39			47	30693	31.84	1.53		
54	18378	27.73	1.64			61	23434	24.31	1.9		
61	16191	24.43	1.86			74	19530	20.26	2.1		
74	13420	20.25	2.2			86	16648	17.27	2.3		
86	11452	17.28	2.6			41	35166	36.48	0.86	K 167 KA 167	4
132kW						62	23338	24.21	1.29		
20	59121	74.34	0.79	K 187 KA 187	4	73	19800	20.54	1.52		
23	51192	64.37	0.92			86	16657	17.28	1.81		
28	42659	53.64	1.10			81	17708	18.37	0.96	K 157 KF 157 KA 157 KAF157	4
31	38499	48.41	1.22			100	14382	14.92	1.18		
34	34666	43.59	1.36			118	12194	12.65	1.39		
38	30841	38.78	1.52			200kW					
45	26570	33.41	1.77			33	55103	45.73	0.85	K 187 KA 187	4
53	22331	28.08	2.1			45	40258	33.41	1.17		
61	19333	24.31	2.3			47	38366	31.84	1.23		
74	16112	20.26	2.6			59	30618	25.41	1.54		
86	13734	17.27	2.8			74	24413	20.26	1.69		
90kW						86	20810	17.27	1.87		
14	56058	102.69	0.84	K 187 KA 187	4	61	29437	24.43	1.02	K 167 KA 167	4
16	51134	93.67	0.92			73	24750	20.54	1.22		
19	42242	77.38	1.11			86	20906	17.35	1.44		
23	35139	64.37	1.34			100	1797				

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p				
200	5.0	279	K 37R17 KF 37R17 KA 37R17 KAF37R17	0.18	1550	1.0	1388	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.25				
	5.2	267				1.1	1218						
	5.9	234				1.3	1053						
	6.8	205				1.5	924						
	7.7	181		0.37		1.7	815						
	8.7	160				2.0	709						
	10	136				2.2	622						
	11	127				2.5	552						
	13	110		0.55		2.9	485						
	14	96				3.2	428		0.75				
400	2.5	552	K 47R37 KF 47R37 KA 47R37 KAF47R37	0.18		2700	3.9			358	K 87R57 KF 87R57 KA 87R57 KAF87R57	1.1	
	2.8	495					4.3		320				
	3.3	416					4.9		283				
	3.7	375		0.25			5.7		246				
	4.3	326					0.34	4037					
	4.8	289					0.39	3609	0.18				
	5.6	250		0.45	3107								
	6.3	219		0.51	2728		0.25						
	7.2	193		0.59	2371								
	8.3	167		0.37				0.67	2088				
9.3	149	0.75	1854										
11	128	0.84	1658				0.55						
600	1.5	906	K 57R37 KF 57R37 KA 57R37 KAF57R37	0.18	0.98			1415	K 97R57 KF 97R57 KA 97R57 KAF97R57	0.37			
	1.7	806			1.1			1229					
	2.0	699			1.3		1078						
	2.3	615		0.25			1.5	951		0.55			
	2.6	544					1.7	837					
	2.9	473					1.9	726		0.75			
	3.3	421					2.2	638					
	3.8	362		0.37			2.5	562		1.1			
	4.4	319					3.0	474					
	5.1	273					3.3	426		1.5			
5.8	240	0.55		3.8	373								
6.5	215			4.2	330		2.2						
7.2	192			4.8	293								
8.4	166	0.75		5.6	250								
9.9	141			5.9	236								
11	126			7.0	201								
820	13	108	K 67R37 KF 67R37 KA 67R37 KAF67R37	1.10	4300	0.23	6027	K 97R57 KF 97R57 KA 97R57 KAF97R57		0.18			
	15	95				0.26	5392						
	1550	1.2		1171		K 77R37 KF 77R37 KA 77R37 KAF77R37	0.18			0.30	4669	K 97R57 KF 97R57 KA 97R57 KAF97R57	0.25
		1.3		1034						0.34	4082		
		1.5		903						0.39	3583		
		1.8		793			0.37			0.45	3108		
		2.0		697						0.51	2757		
		2.3		613						0.58	2419		
		2.6		542					0.66	2123			
		3.0		471			0.55		0.75	1856	0.75		
3.3		420	0.86	1625									
3.9		361	0.98	1430									
4.3	323	0.75		1.1		1261							
5.1	272			1.3		1102							
5.8	240			1.5		957							
6.4	217	1.1		1.6		855							
7.3	191			1.9		743							
1550	0.59	2370	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.18		2.1	651		K 97R57 KF 97R57 KA 97R37 KAF97R37	1.5			
	0.68	2050				2.4	573						
	0.78	1772				2.8	504						
	0.92	1514				3.2	437						
						3.6	382						
				4.1		342	2.2						

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。 The power are all overload in the table. The decided torque according to operating condition should not more than gear unit's nominal torque.

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	
4300	4.6	305	K 97R57	3.0	13000	1.5	899	K 127R77	3.0	
	5.4	258	KF 97R57			1.8	790			KF 127R77
	6.0	232	KA 97R57			2.0	690			
	7.1	199	KAF97R57	4.0		2.3	599	KAF127R77		
8000	0.13	10528	K 107R77 KF 107R77 KA 107R77 KAF107R77	0.18		3.0	468			5.5
	0.15	9391				3.4	410			
	0.17	8211				2.6	536	K 127R87		
	0.19	7167		0.25		2.9	473		KF 127R87	
	0.23	6097				3.3	418			KA 127R87
	0.25	5582				3.8	367	KAF127R87		
	0.27	5065		0.37		4.2	330		7.5	
	0.32	4299				4.8	290			
	0.37	3757				18000	0.08	17679		
	0.43	3236		0.09	15729					
	0.48	2869		0.10	14721					
	0.56	2504		0.11	13097					
	0.63	2203		0.12	11368					
	0.74	1869		0.14	10114					
	0.83	1689		0.16	8718					
	0.91	1533		0.18	7734					
	1.1	1317		0.27	5074		1.1			
	1.2	1150		0.31	4514					
	1.4	1015		0.35	3974					
	1.6	871		0.40	3516	K 157R97				
	1.8	782		0.46	3047		KF 157R97			
	2.0	686		0.48	2899			KA 157R97		
	2.3	606		0.60	2319	KAF157R97				
	2.7	515		0.69	2026		2.2			
	3.1	455		0.77	1802					
	3.6	402		0.83	1680	3.0				
	4.1	351		1.0	1365					
	4.7	307		1.1	1229					
	5.2	277		1.3	1093	4.0				
	5.9	243		1.5	942					
13000	0.08	17550	K 127R77 KF 127R77 KA 127R77 KAF127R77	0.18	1.6		854	4.0		
	0.09	16006			1.8	756				
	0.10	14975			2.1	661	5.5			
	0.11	12440		2.5	565					
	0.13	10914		0.25	2.9	503		7.5		
	0.14	9819			3.3	433				
	0.16	8443			5.0	290	11			
	0.19	7483		0.37	4.8	307		K 157R107		
	0.21	6565			5.6	260			KF 157R107	
	0.24	5804			6.2	237	KA 157R107			
	0.28	5027		7.0	210	KAF157R107				
	0.31	4423		0.55	0.07			19653	K 167R97	
	0.37	3801			0.08		17345	KA 167R97		
	0.43	3237			0.09	14945	0.55			
	0.47	2941		0.75	0.11	13190				
	0.55	2548			0.12	11532				
	0.63	2218			0.14	10227				
	0.72	1926		1.1	0.16	8597	0.75			
	0.79	1757			32000	0.21		6538		
	0.90	1541				0.26		5366		
	1.0	1342		0.29		4798	1.1			
	1.2	1177		0.34	4059	1.5				
	1.4	1025								


表 1 所示为各型减速机的额定功率，表中各型减速机的额定功率均按 100% 额定功率计算。

The power are all overload in the table. The decided torque according


Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p						
32000	0.42 0.52	3359 2741	K 167R97 KA 167R97	2.2	50000	2.0 2.4	720 614	K 187R107 KA 187R107	15						
	0.63 0.65	2252 2174		3		2.9 3.3	514 449		18.5						
	0.85 1.0	1698 1402		4		4.0 5.5	365 268		30 37						
	1.1 1.3	1291 1101		5.5		6.5 7.4	227 199		45						
	1.5 1.7 1.9	944 843 757		7.5		8.8 	168 								
	2.6 3.0	561 479		11											
	3.4 3.9	422 367		15											
	4.7	313		18.5											
	5.4 5.9	273 250		22											
	6.7 7.2 7.9	218 203 185		K 167R107 KA 167R107							30				
	9.0	163		37											
	11 12	139 121		45											
	50000	0.04 0.05 0.06 0.07 0.08	32625 27165 24353 19144 16978	K 187R97 KA 187R97	0.55										
		0.10 0.11 0.12	14272 13116 11647		0.75										
		0.13 0.15 0.17	10413 9363 8126		1.1										
		0.19 0.21 0.24	7333 6738 5984		1.5										
		0.27 0.30 0.33	5350 4810 4364		2.2										
		0.39 0.46	3609 3062		3										
		0.56 0.63 0.69	2519 2268 2054		4										
		0.78 0.88	1821 1605		5.5										
		1.0 1.2	1395 1196		7.5										
		2.0 2.4	737 619		15										
		2.8	524		18.5										

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。 The power are all overload in the table.The decided torque according to operating condition should not more than gear units' nominal torque.



K

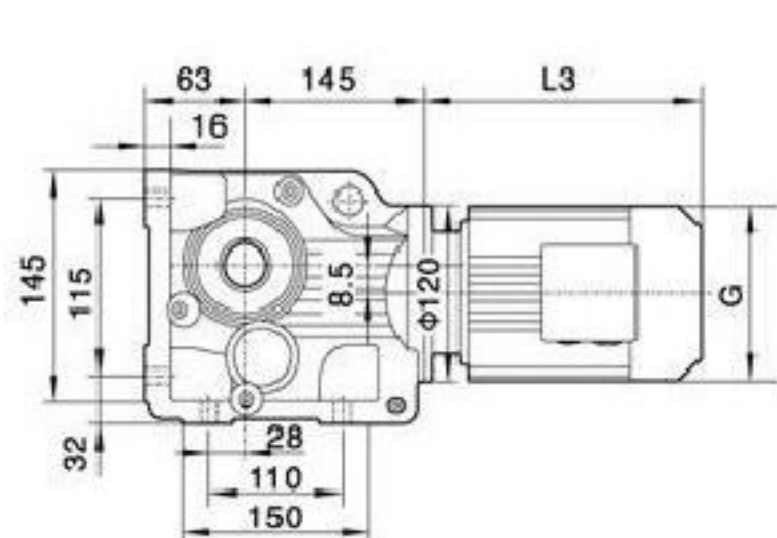


K37

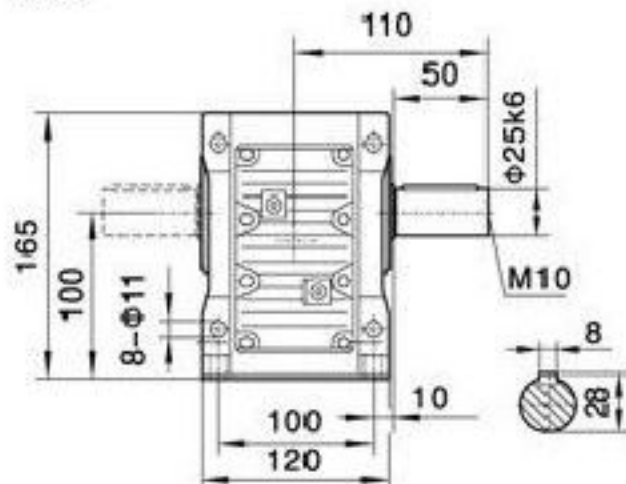



KAB37

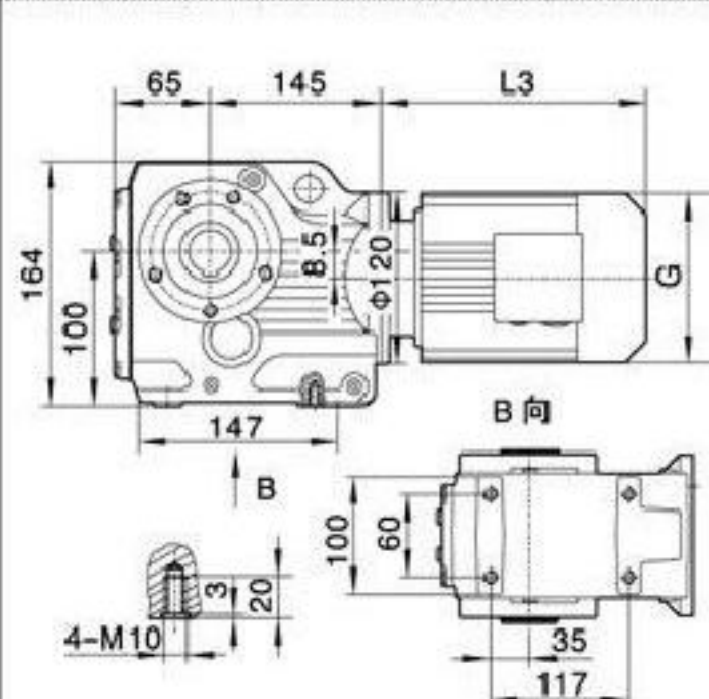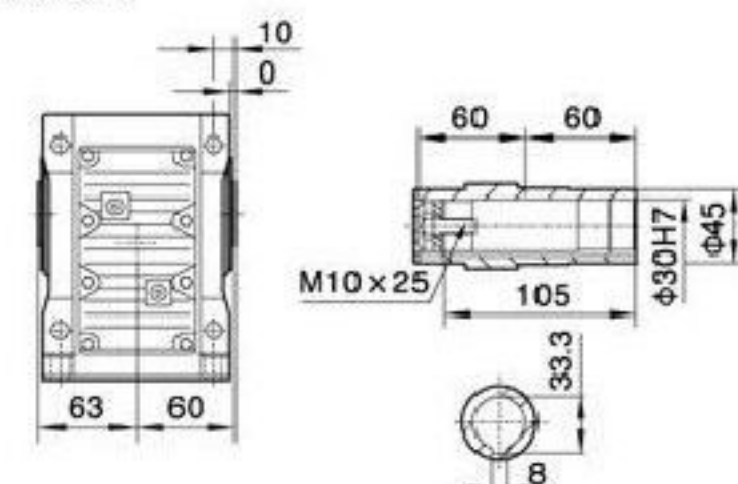


KA37

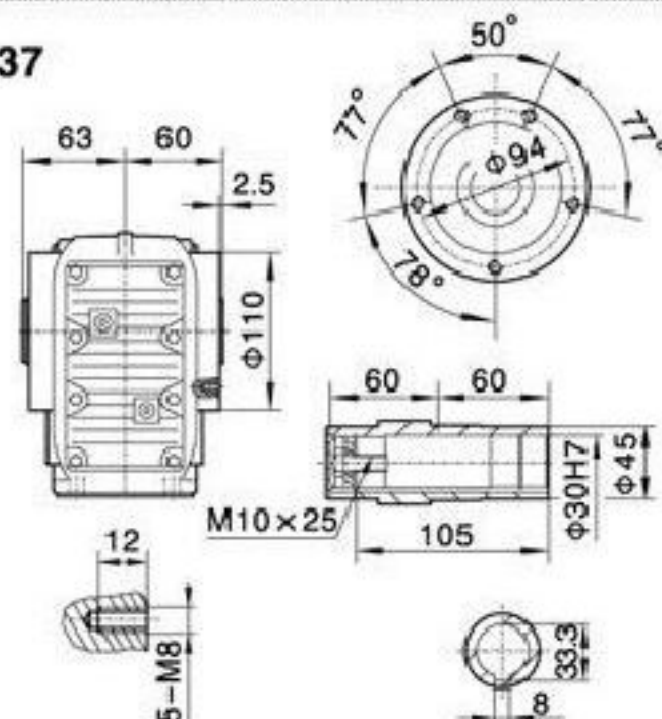


KAZ37

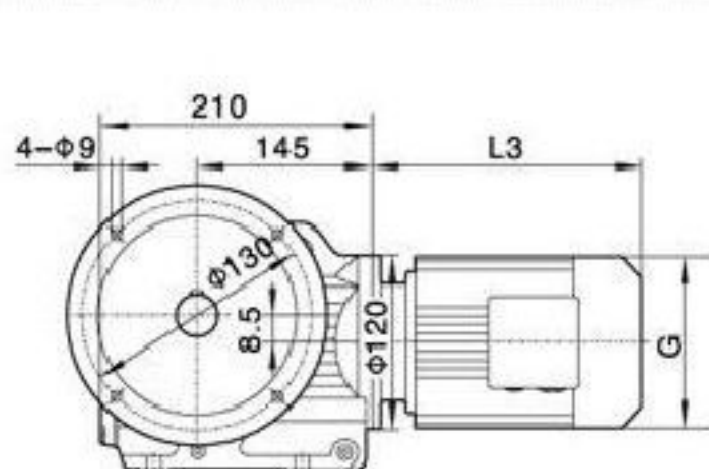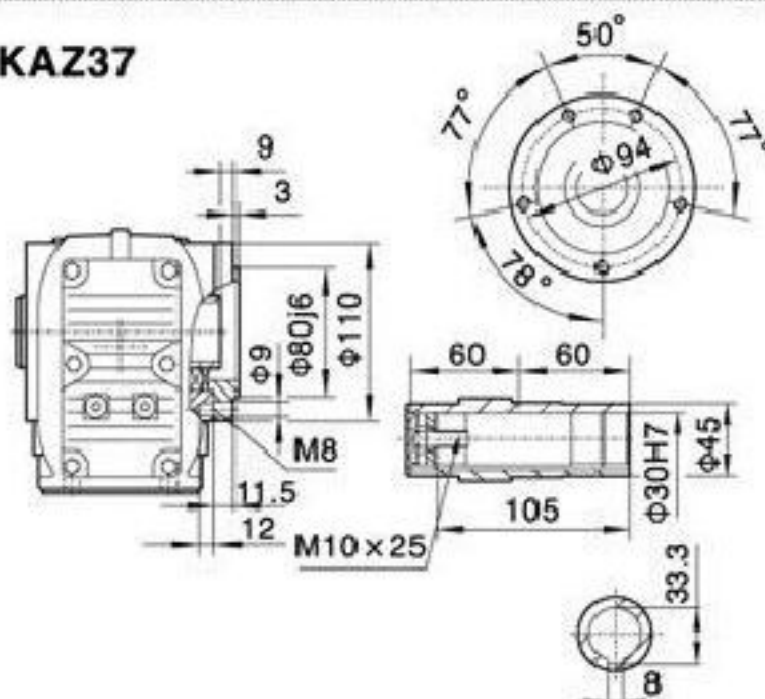


KF37

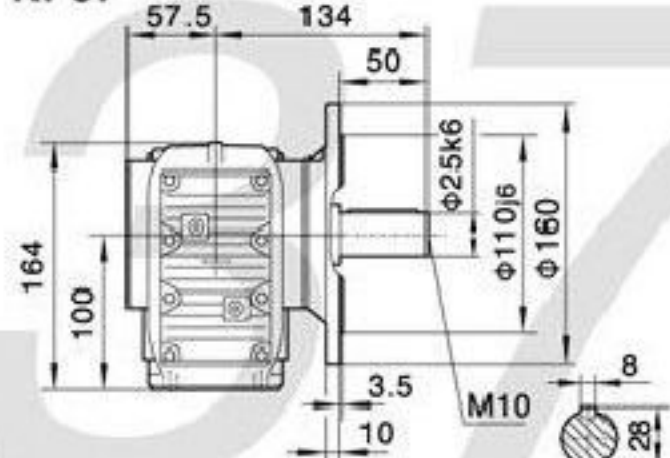


KAF37

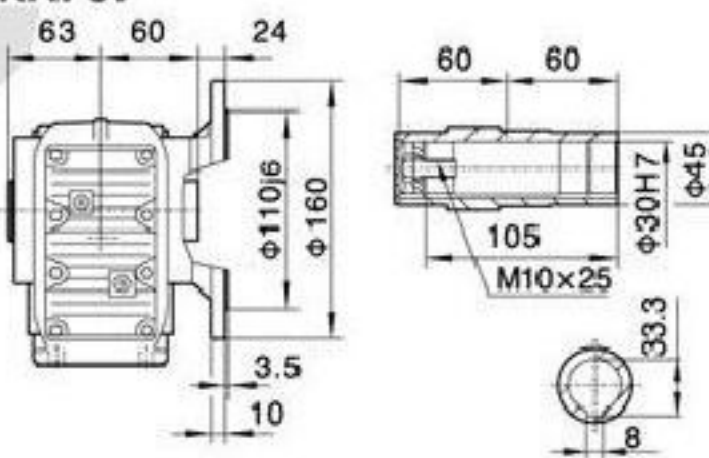


KAT37

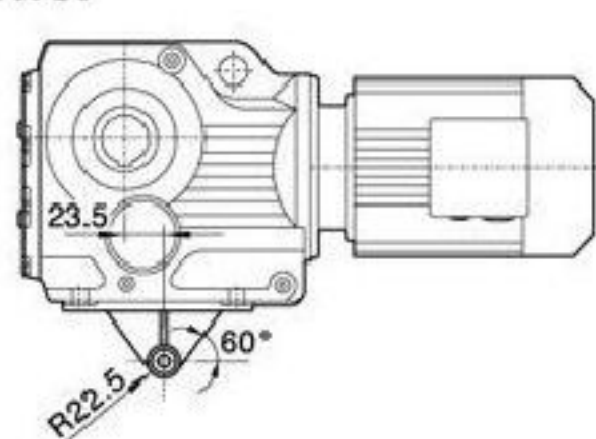


防转臂C面安装
C side of torque-arm

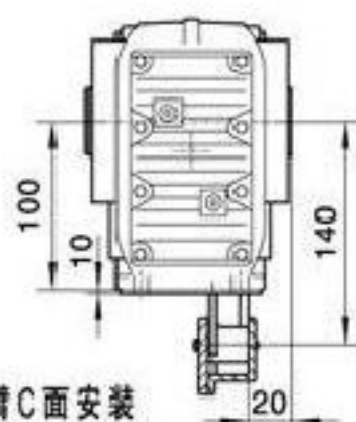


防转臂D面安装
D side of torque-arm

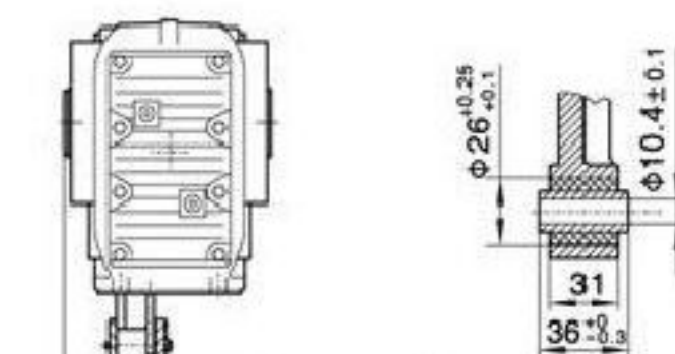


电机需方配或配特殊电机时
需加联接法兰

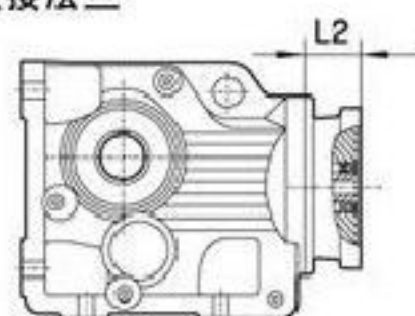

K..S37

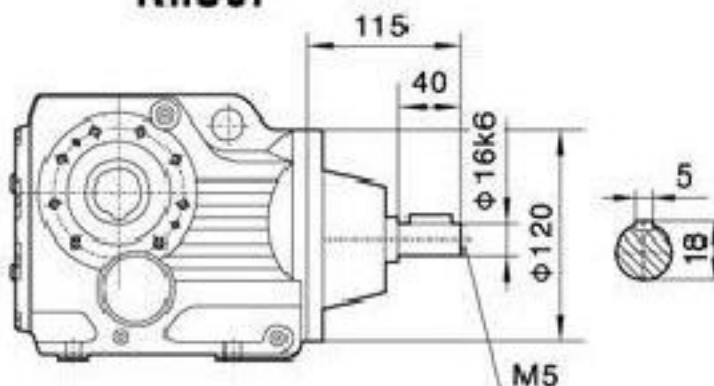

K..37R17

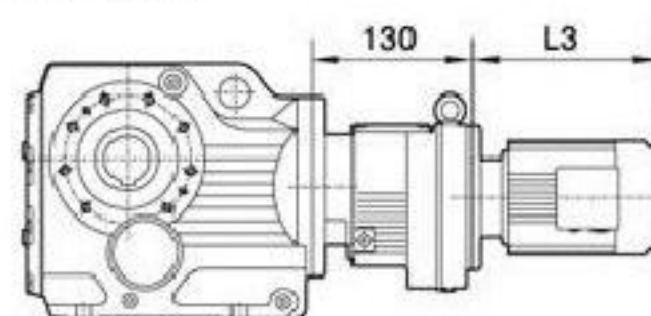


注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.


Y2电机机座号 Motor size	63	71	80	90S	90L	100				
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0				
L3	235	245	278	304	328	340				
G	130	145	175	195	195	215				
L2	71	71	71	71	71	93				

注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照. 2."K.."表示K, KA, KF, KAF, KAZ, KAB.





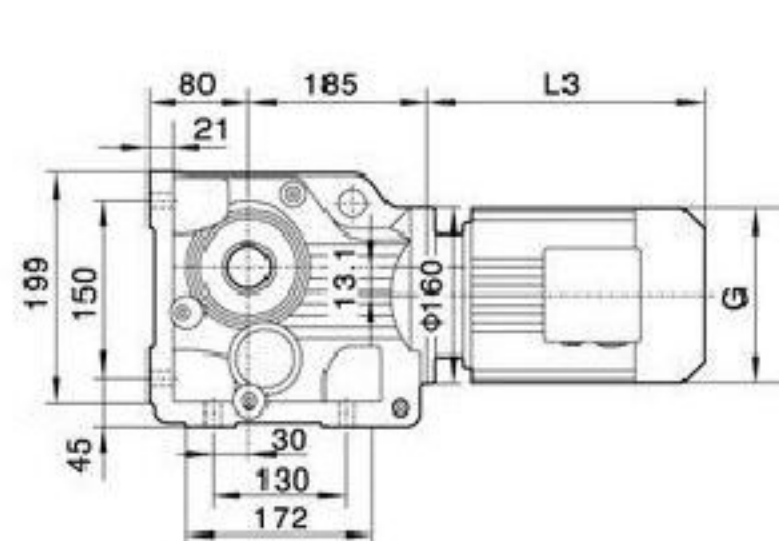


K57

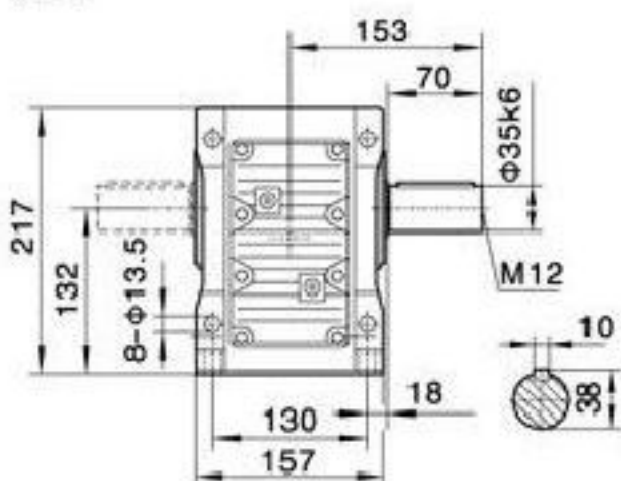



KAB57

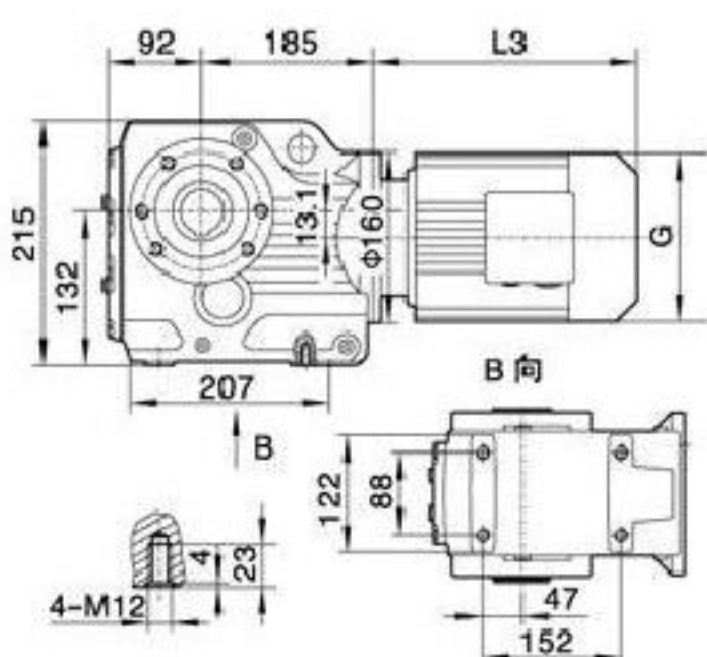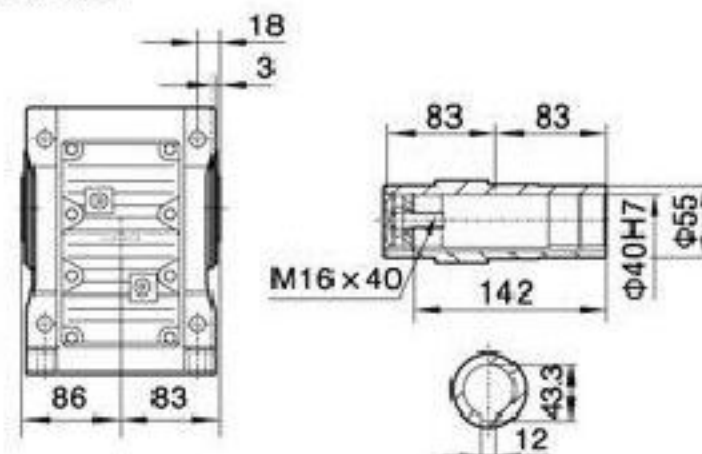


KA57

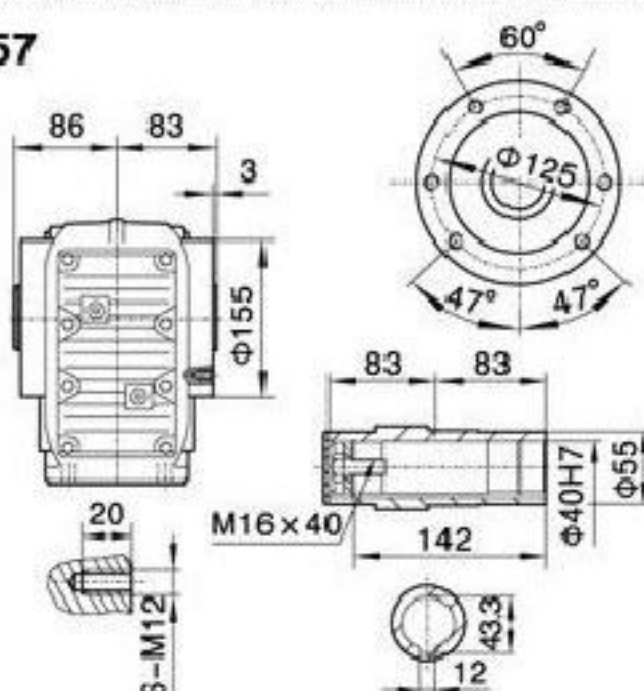


KAZ57

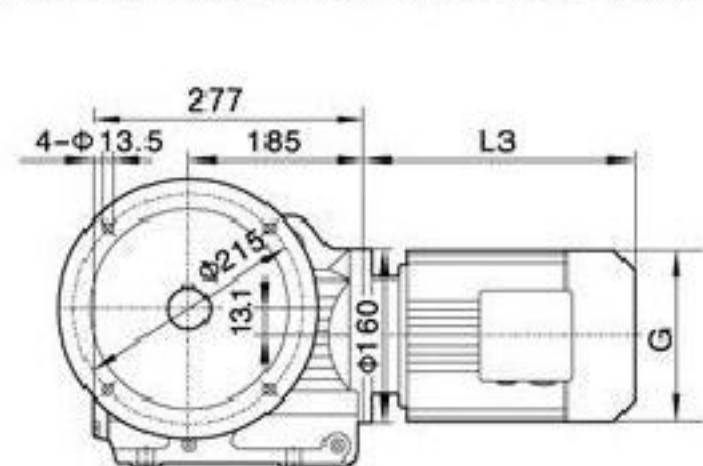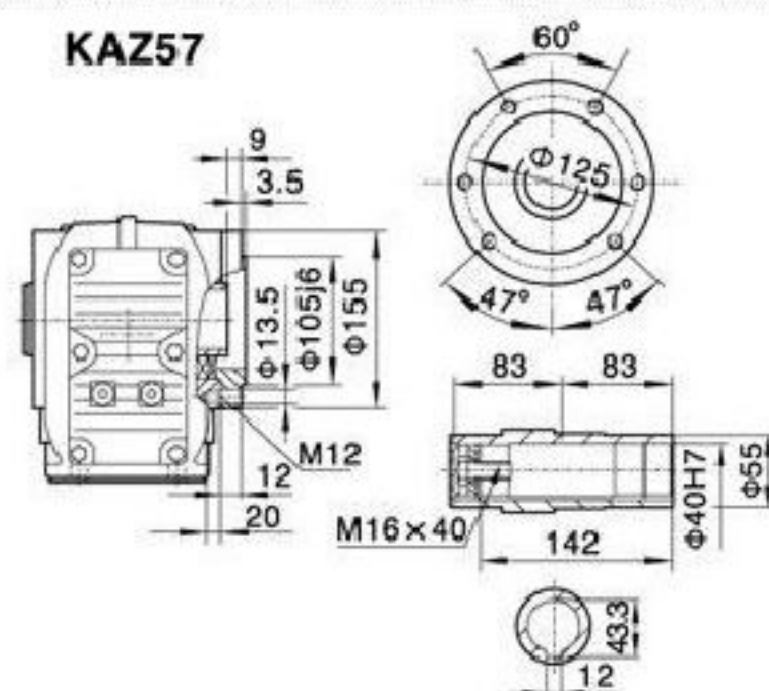


KF57

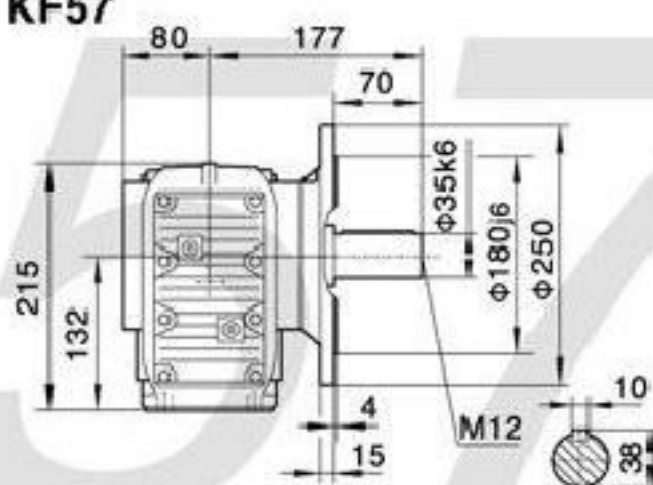


KAF57

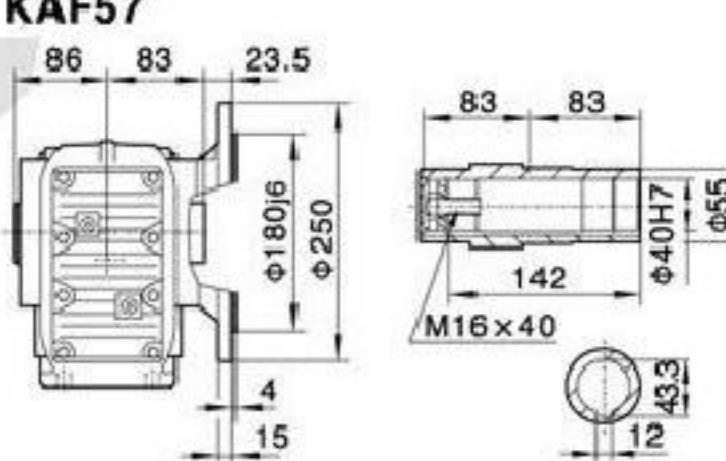


KAT57

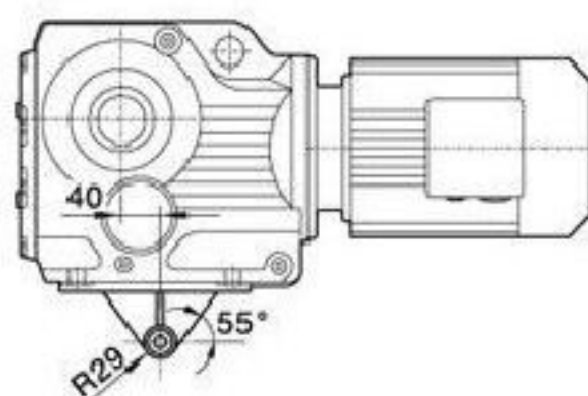


防转臂C面安装
C side of torque-arm

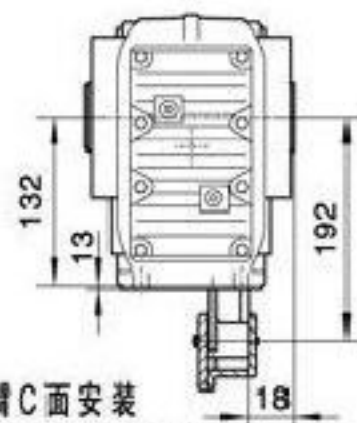


防转臂D面安装
D side of torque-arm

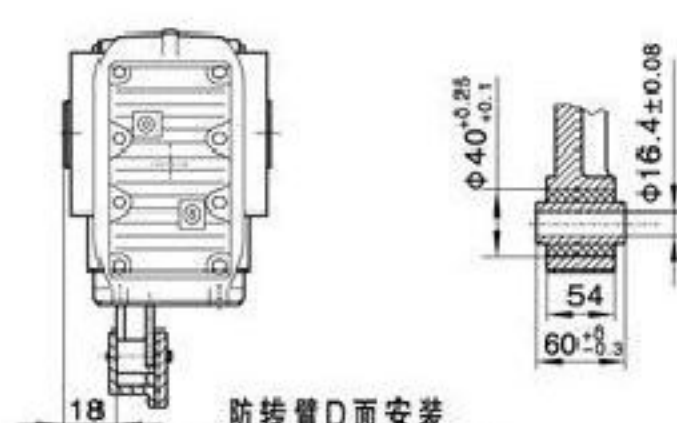


电机需方配或配特殊电机时
需加联接法兰

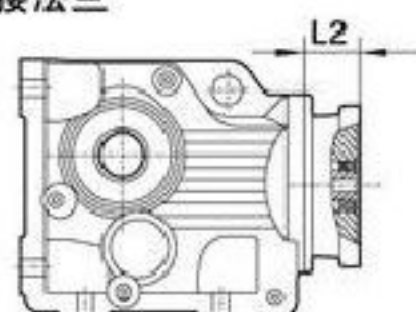

K..S37

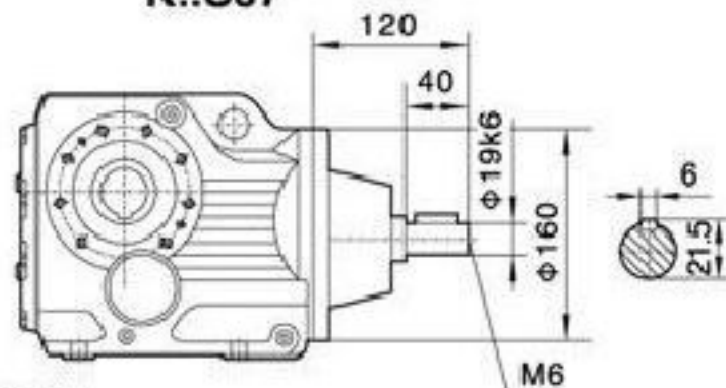

K..57R37

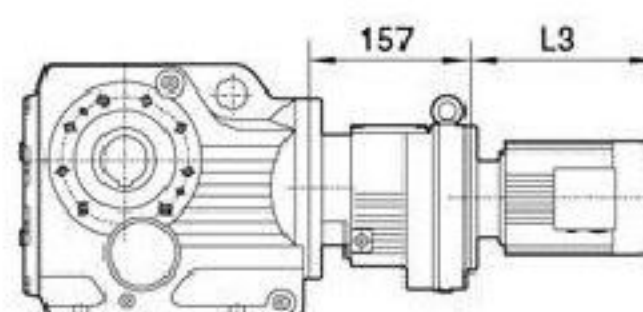

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to connected.

Y2电机机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	245	278	304	328	350	380	425		
G	130	145	175	195	195	215	240	275		
L2	81	81	81	81	81	93	93	101		


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.





K67

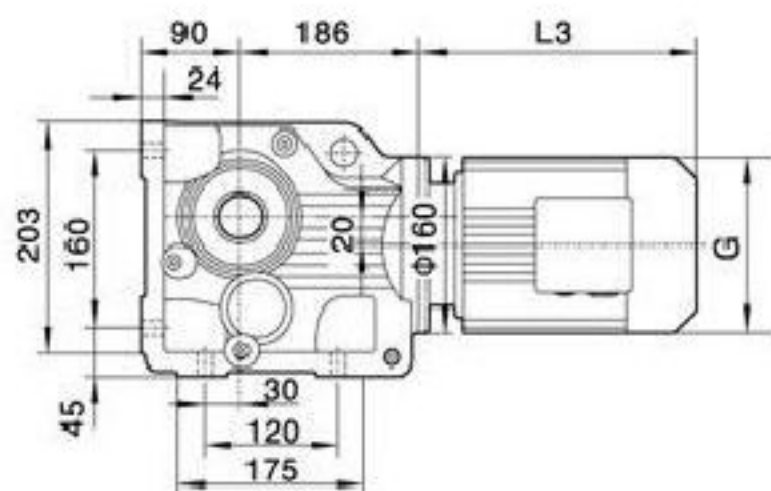


KAB67

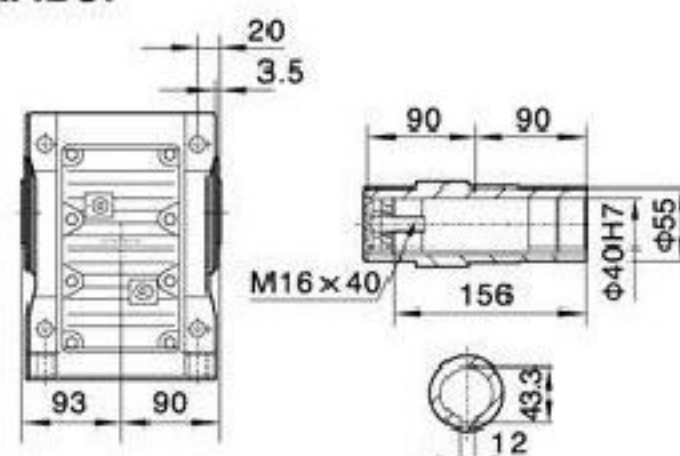



KA67

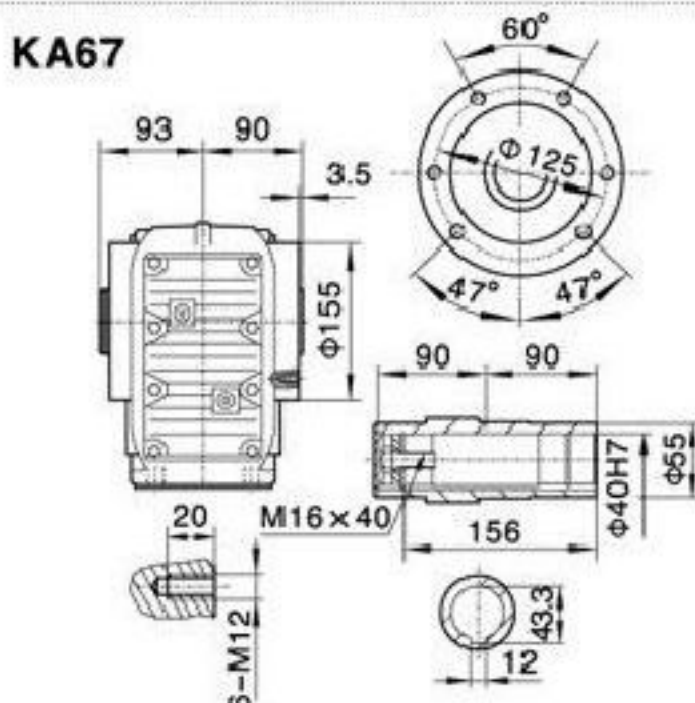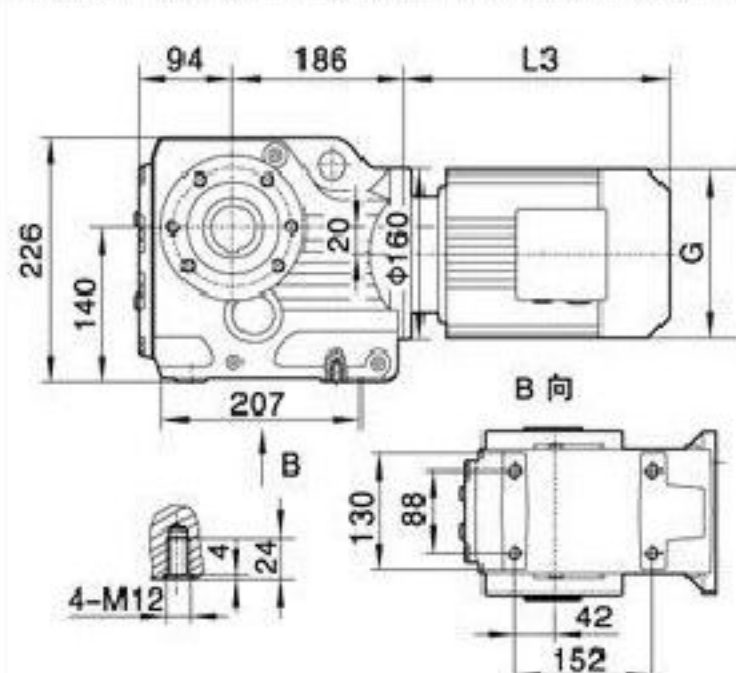


KAZ67

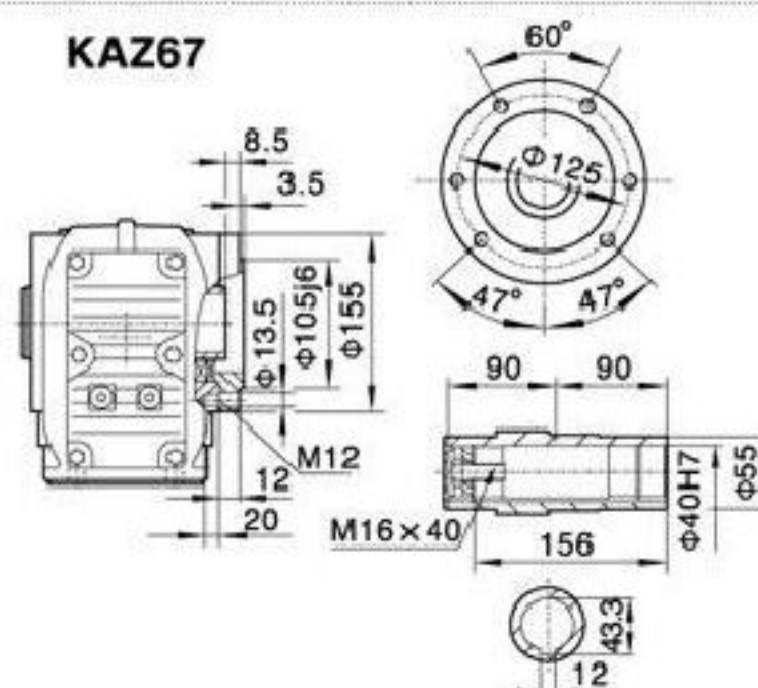




KF67

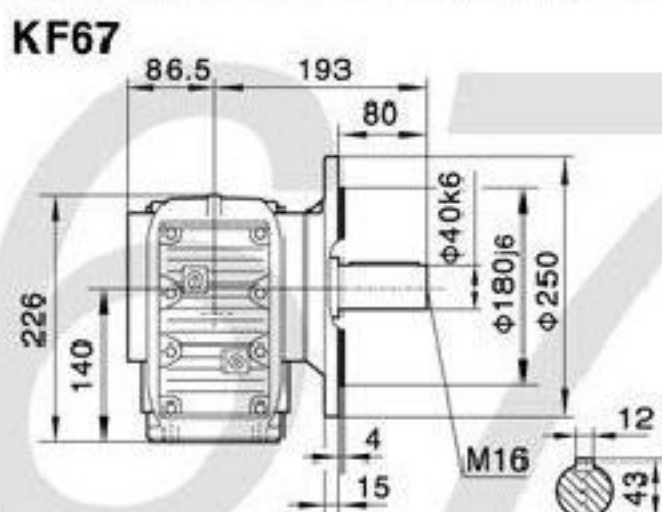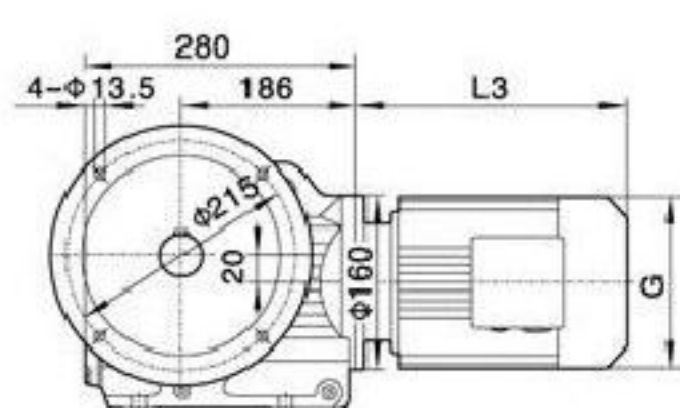


KAF67

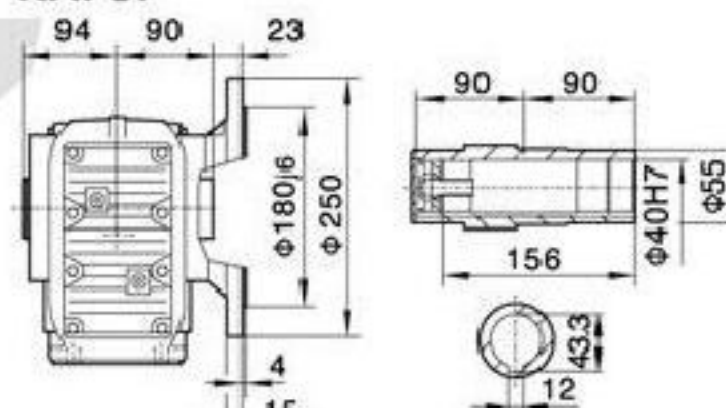


KAT67

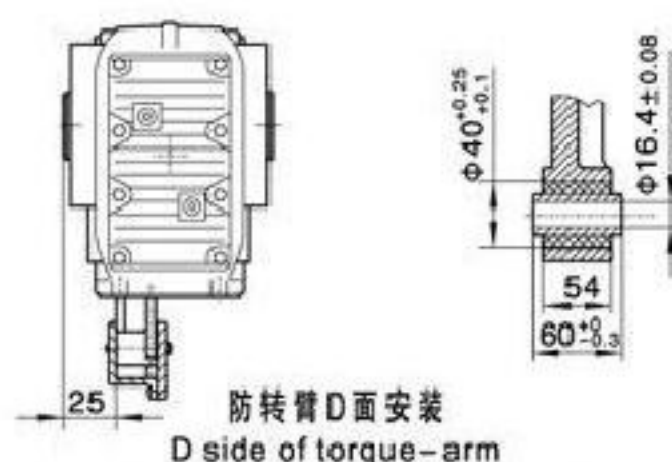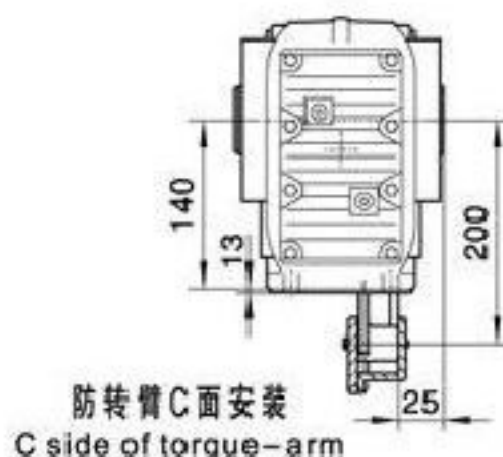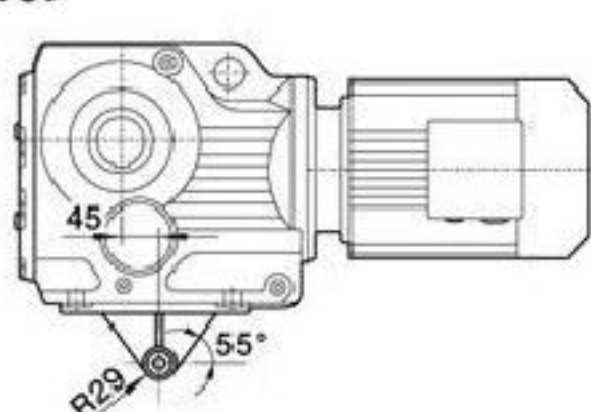


电机需方配或配特殊电机时
需加联接法兰

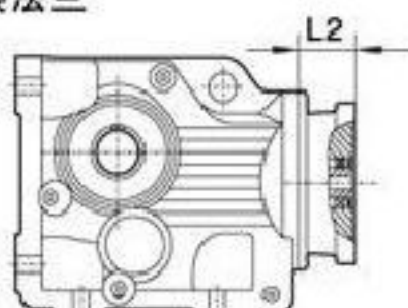

K..S67

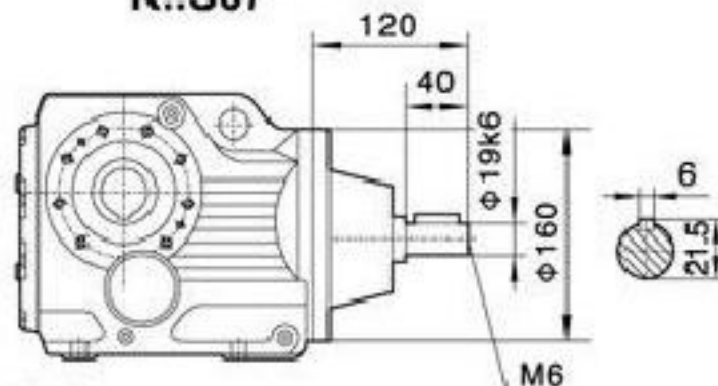

K..67R37

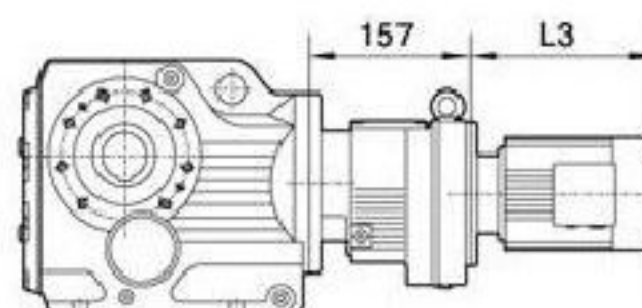

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to connected.

Y2电机机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	245	278	304	328	350	380	425		
G	130	145	175	195	195	215	240	275		
L2	81	81	81	81	81	93	93	101		


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.





K

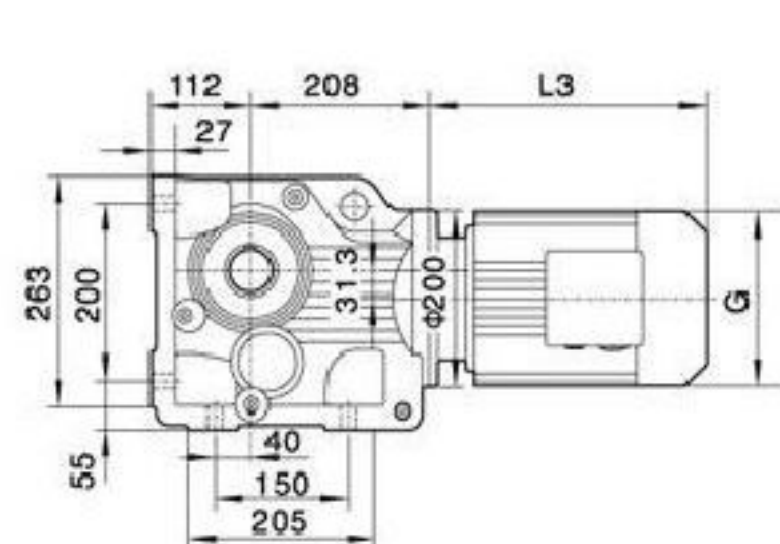


K77

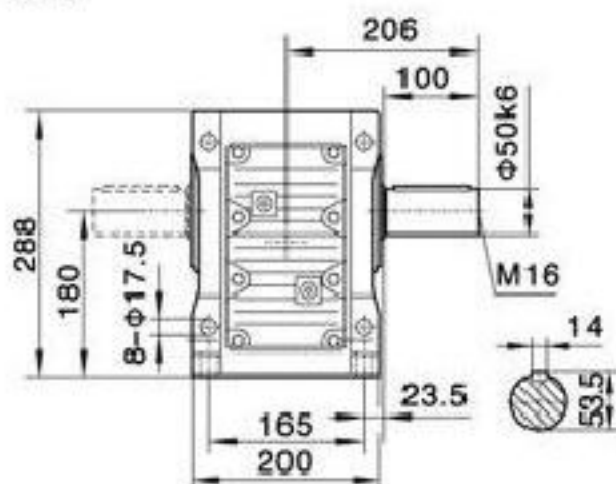



KAB77

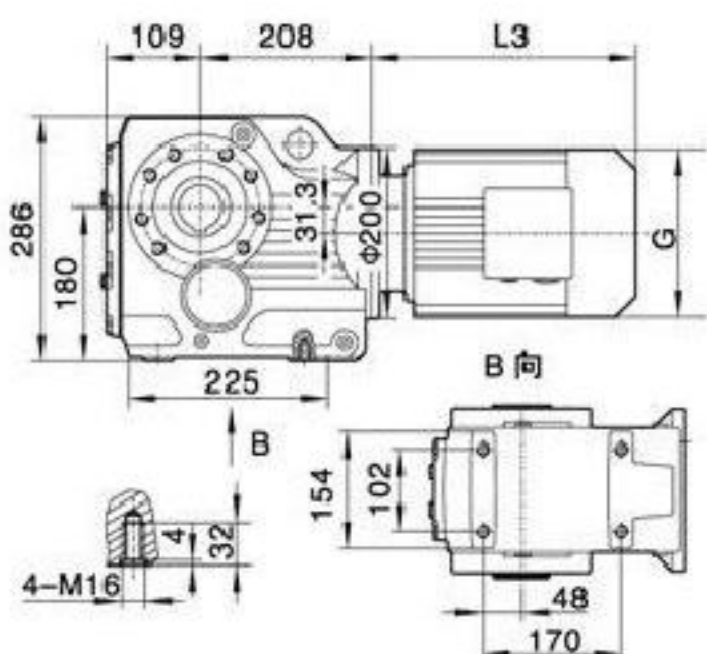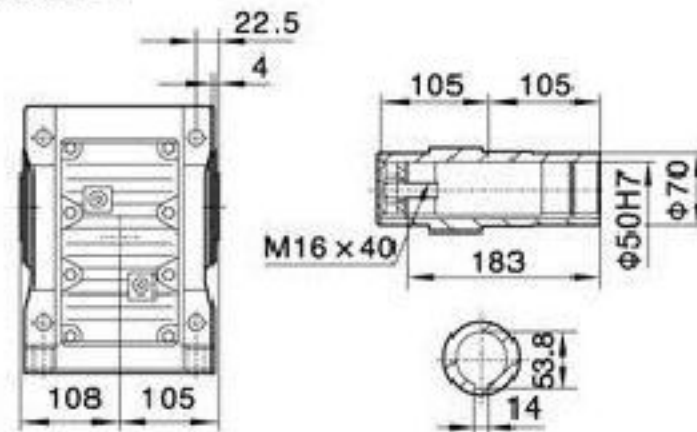


KA77

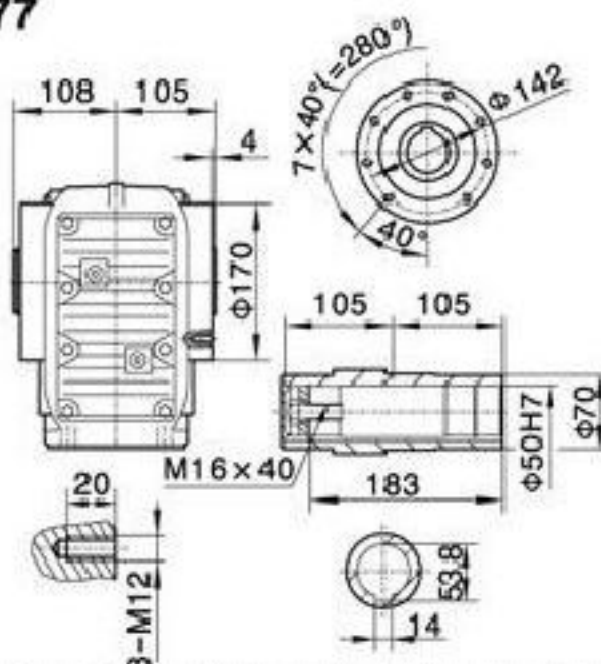


KAZ77

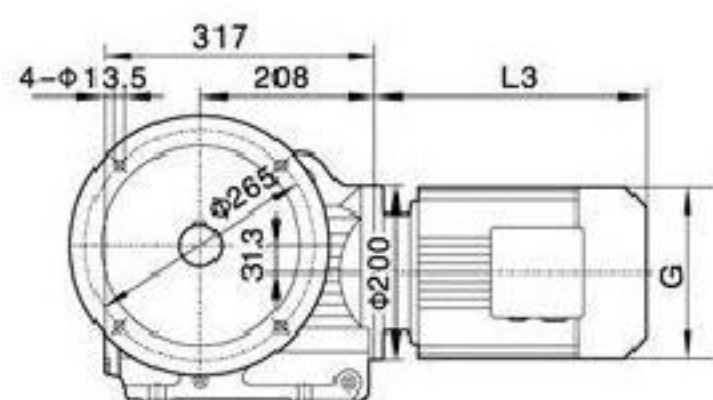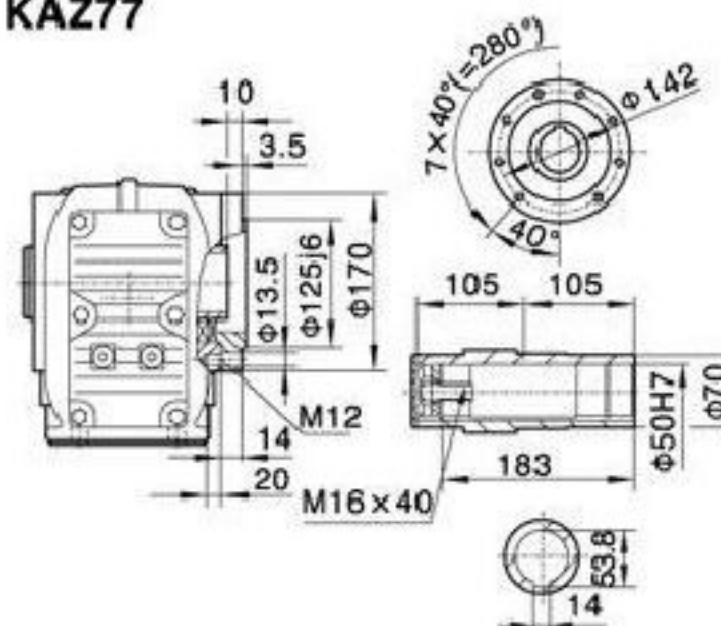


KF77

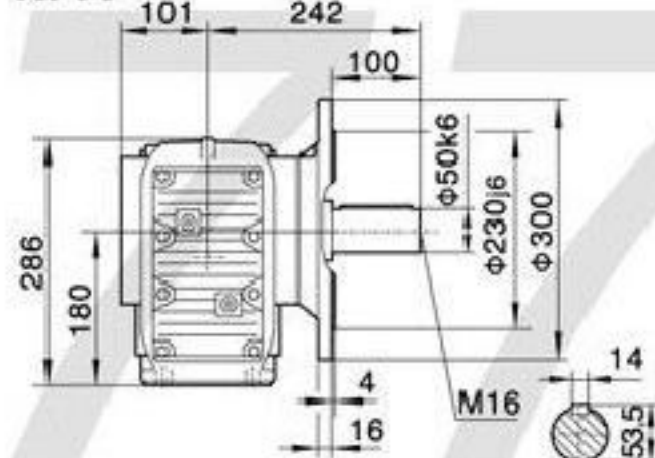


KAF77

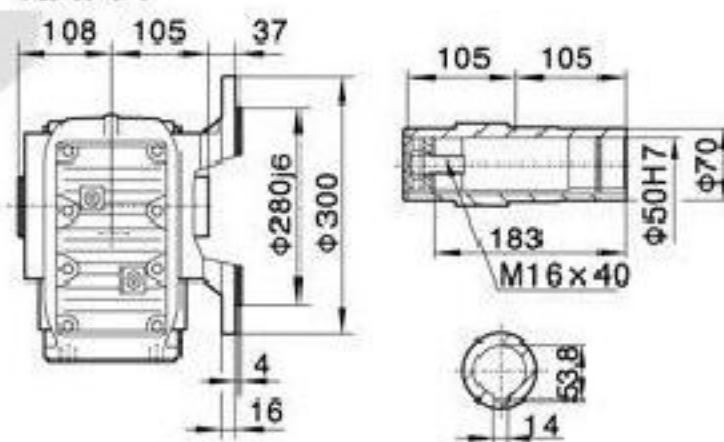


KAT77

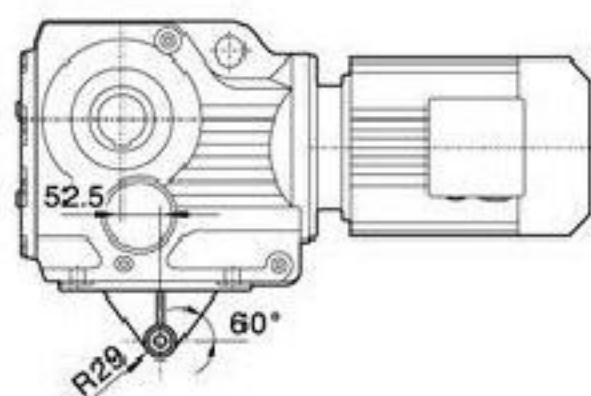


防转臂C面安装
C side of torque-arm

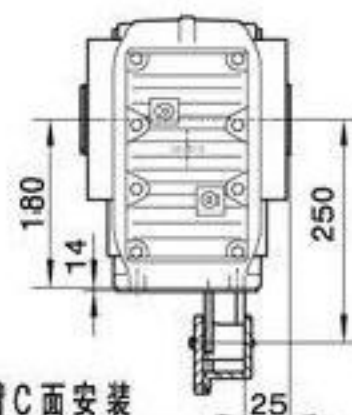


防转臂D面安装
D side of torque-arm

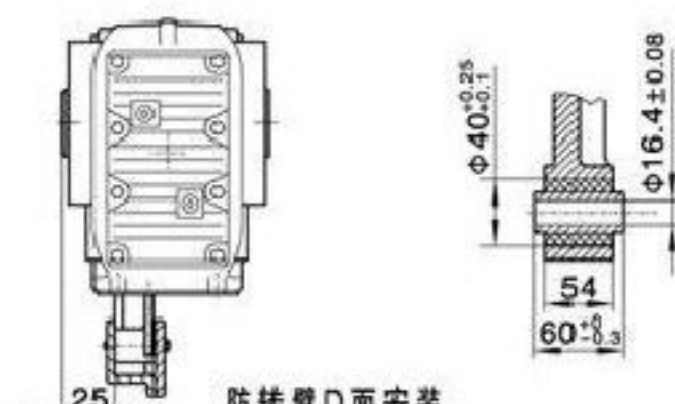


电机需方配或配特殊电机时
需加联接法兰

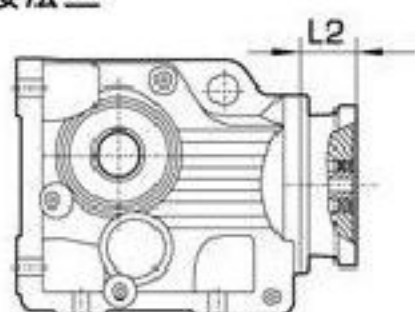

K..S77

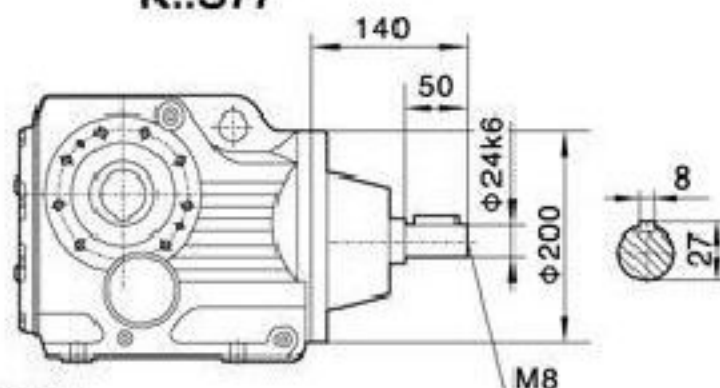

K..77R37

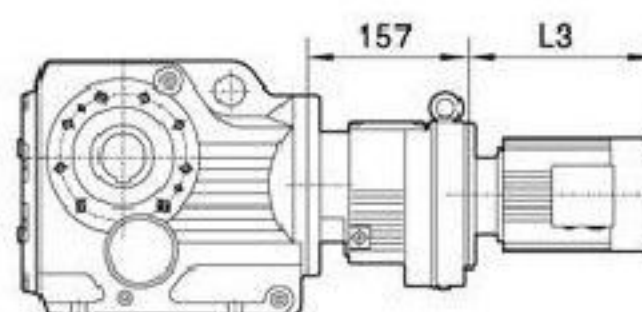


注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.


Y2电机机座号 Motor size	71	80	90S	90L	100	112M	132S	132M	160M
功率/4P Power/(kW)	0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11
L3	233	278	304	328	350	380	425	461	524
G	145	175	195	195	215	240	275	275	330
L2	81	81	81	81	93	93	101	101	126

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.


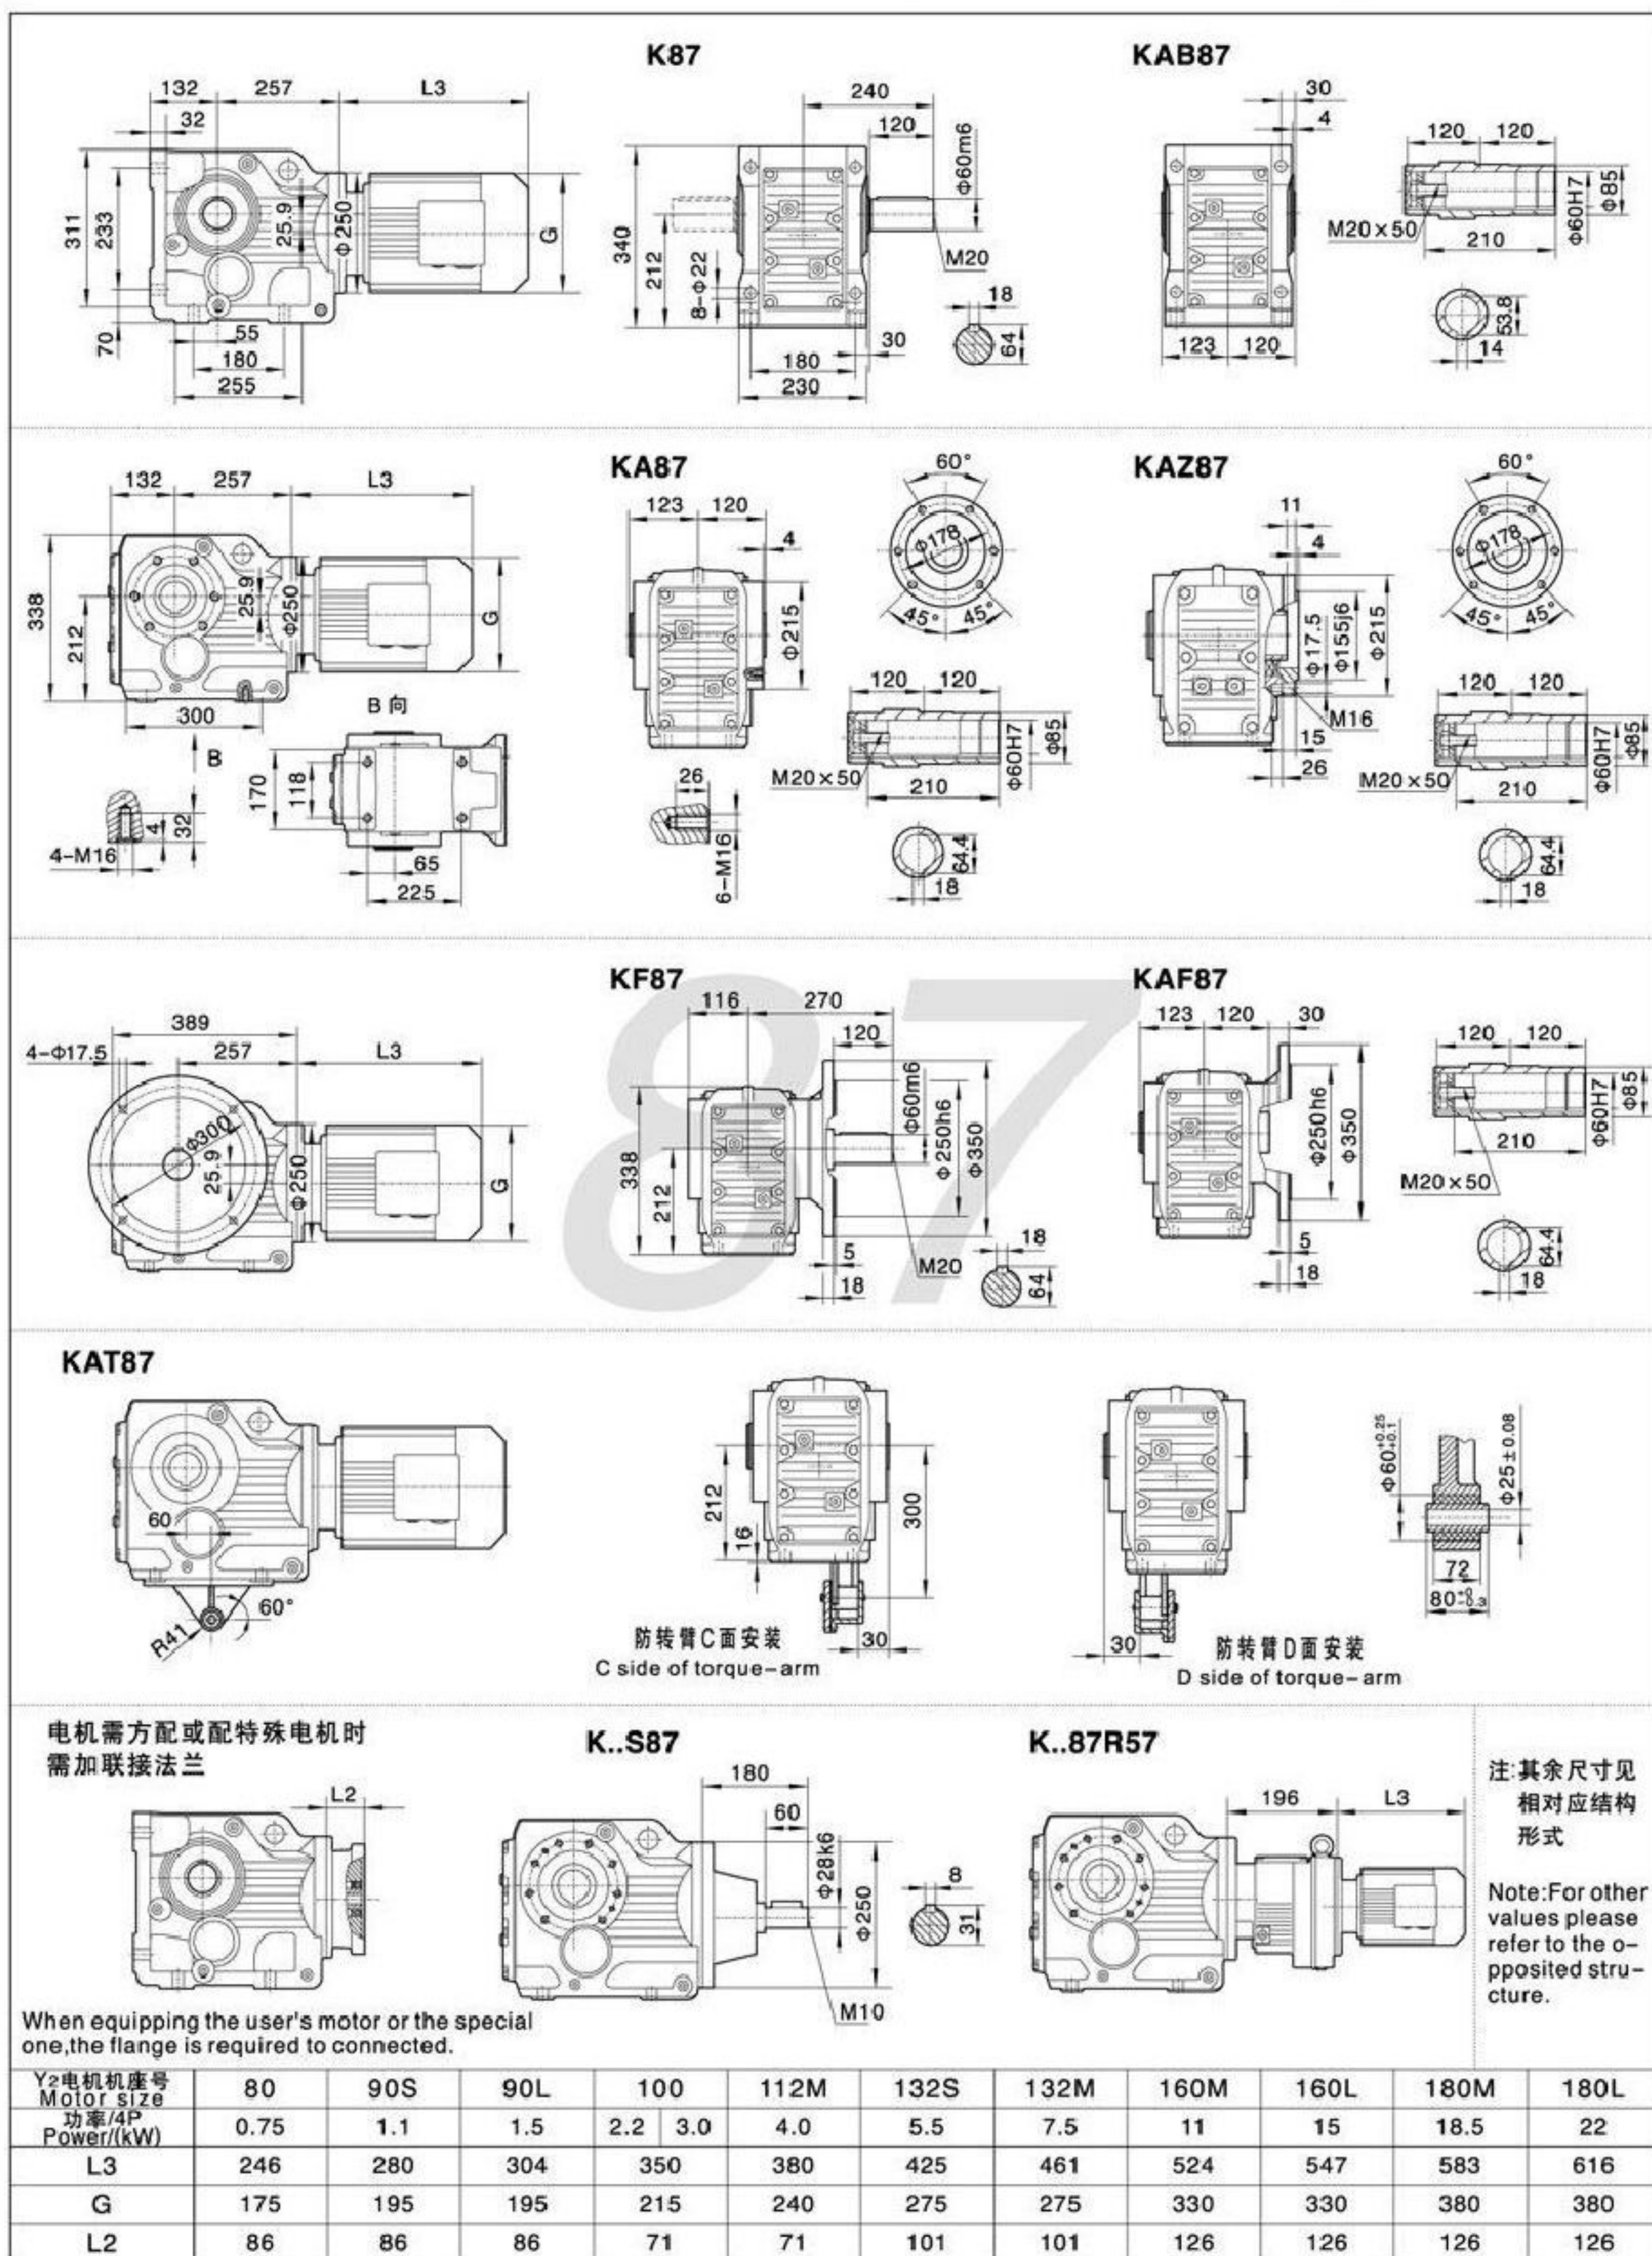






K97

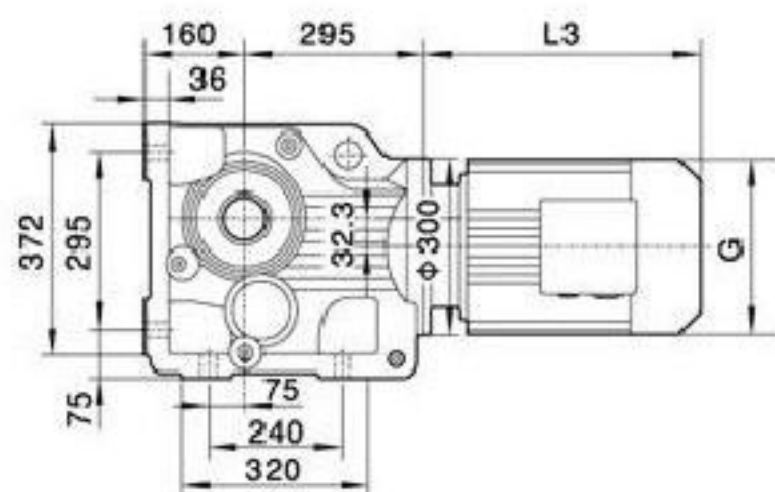

KAB97

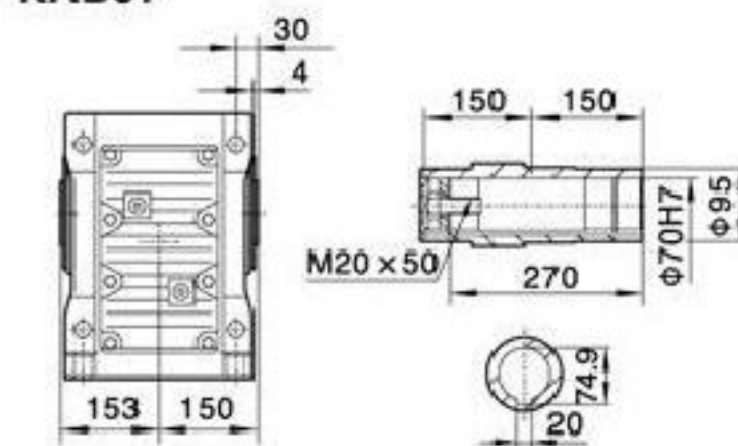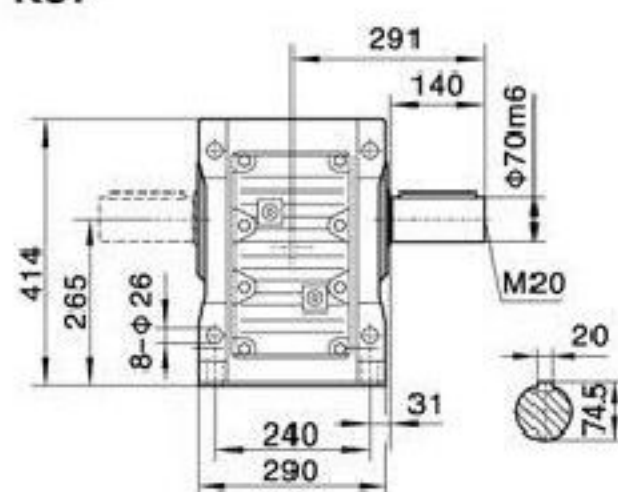



KA97

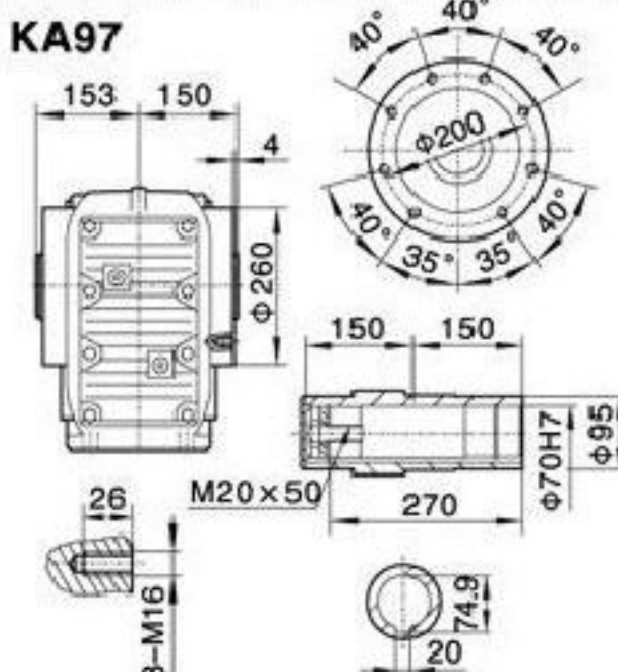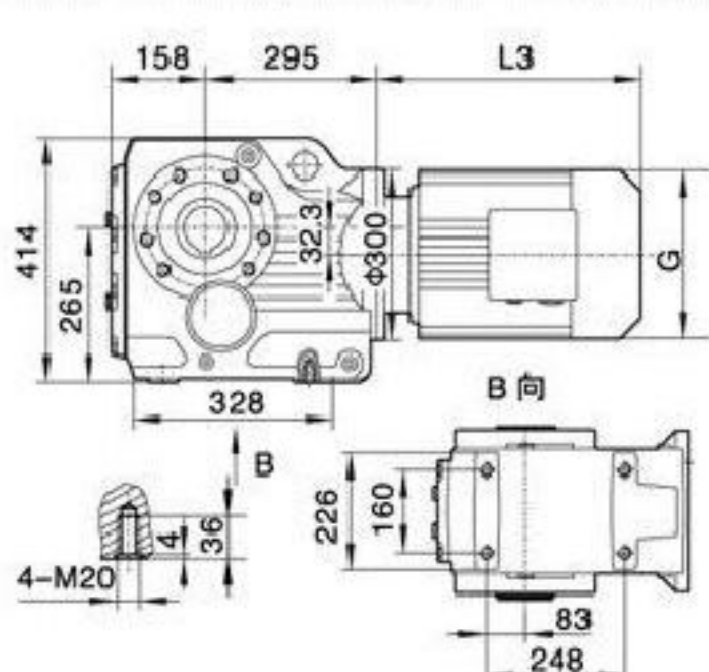


KAZ97






KF97

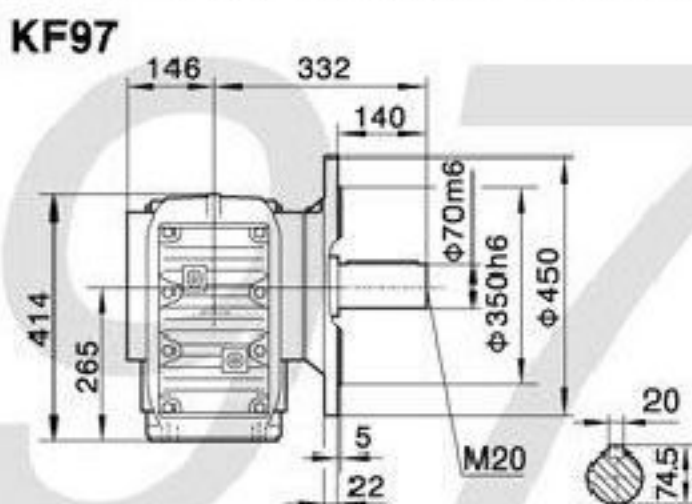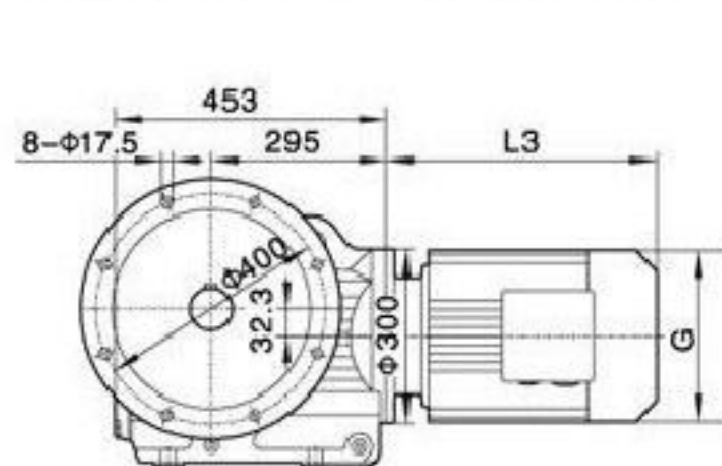


KAF97

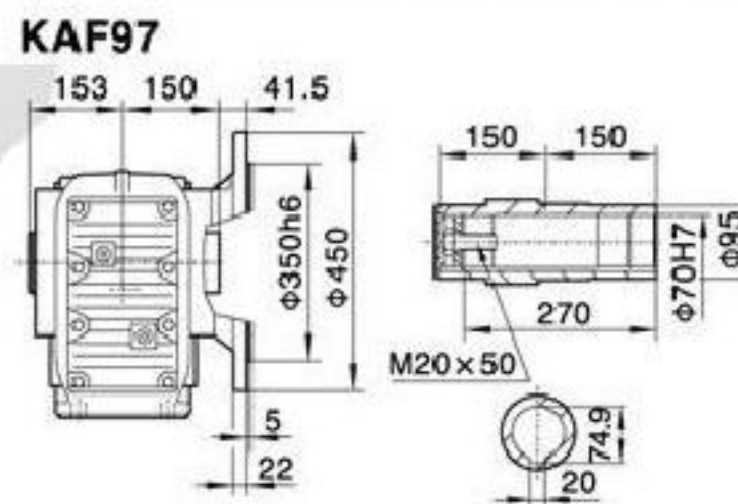


KAT97

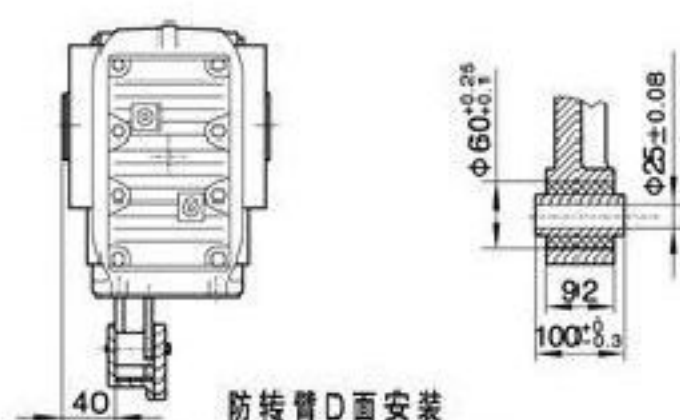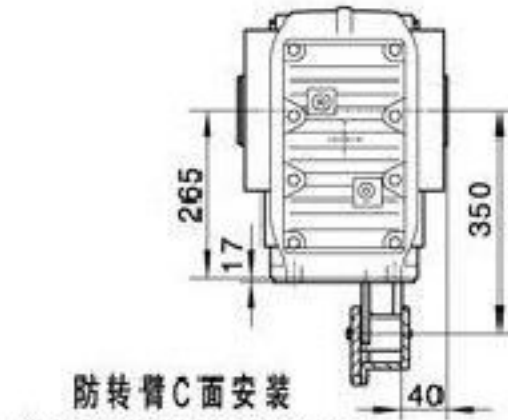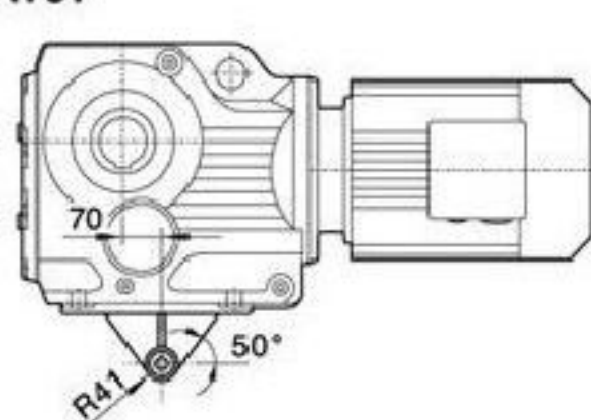


电机需方配或配特殊电机时
需加联接法兰

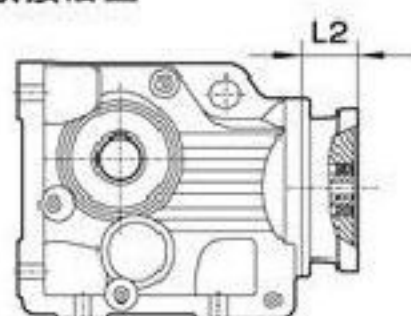

K..S97

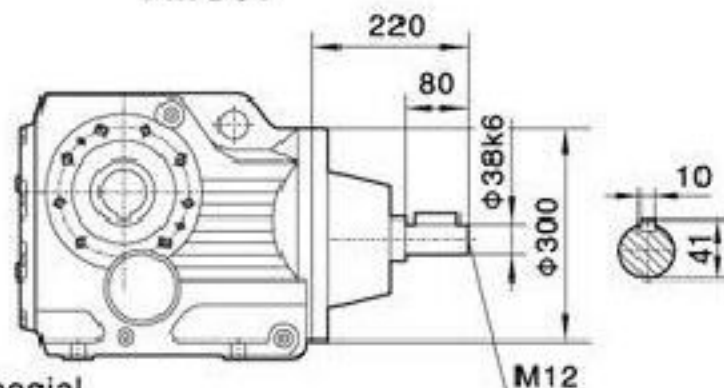

K..97R57

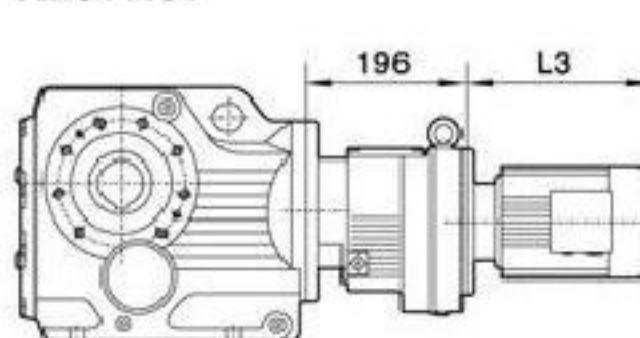

注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机机座号 Motor size	90S	90L	100	112M	132S	132M	160M	160L	180M	180L	200
功率/4P Power/(kW)	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	280	304	315	334	425	461	524	547	555	588	652
G	195	195	215	240	275	275	330	330	380	380	420
L2	86	86	101	101	101	101	126	126	126	126	132


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.





K107

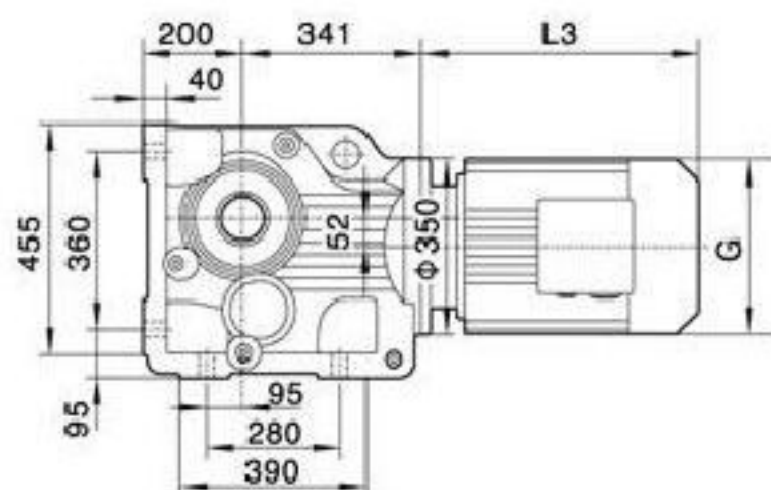


KAB107

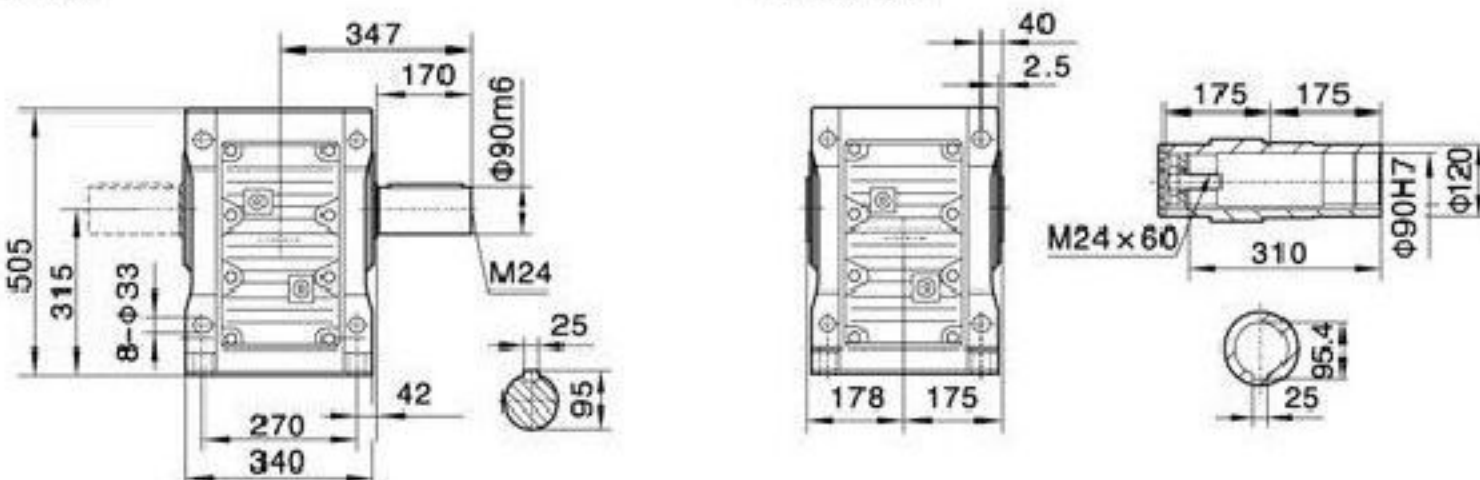



KA107

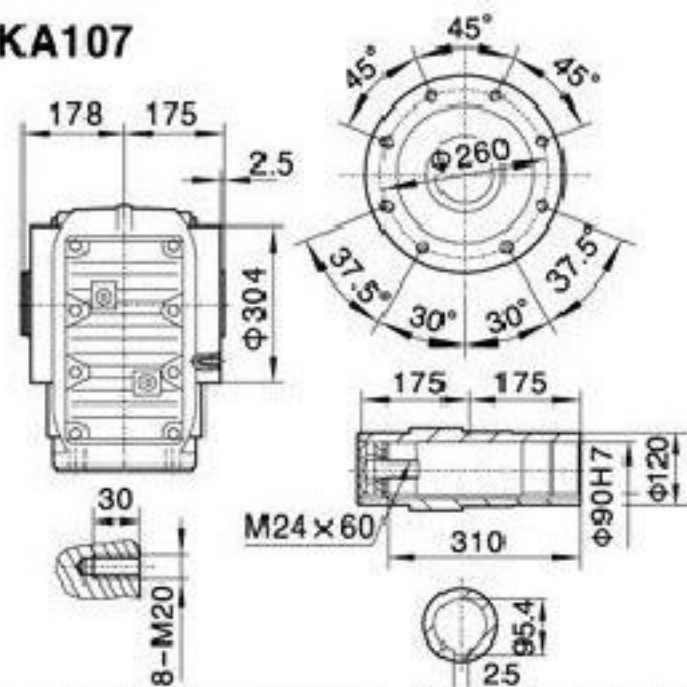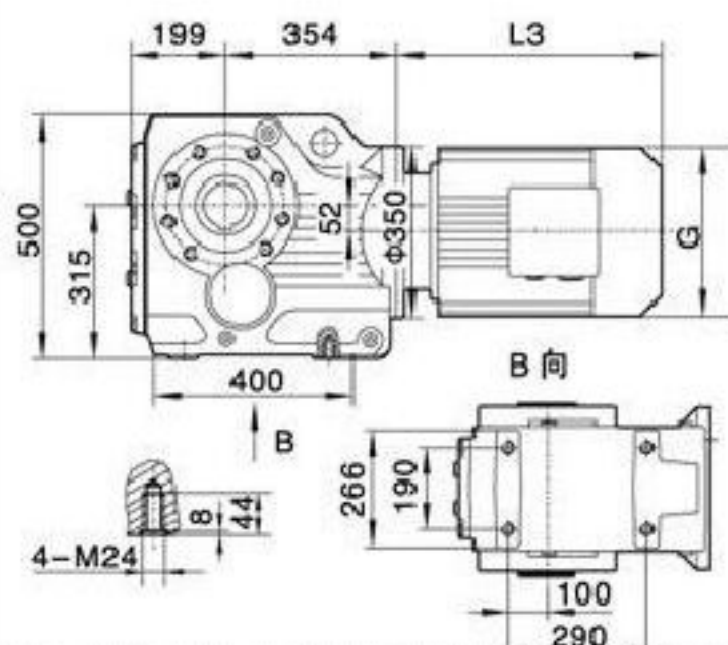


KAZ107

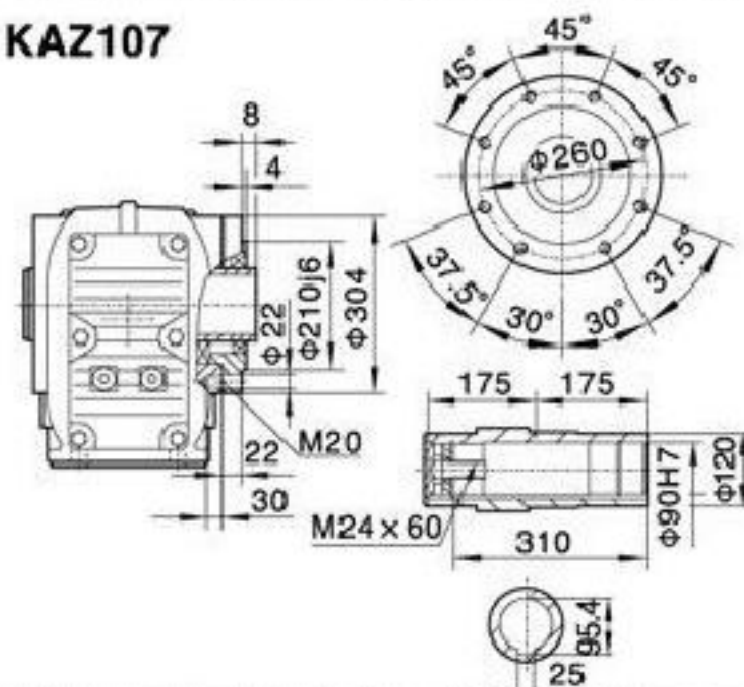




KF107

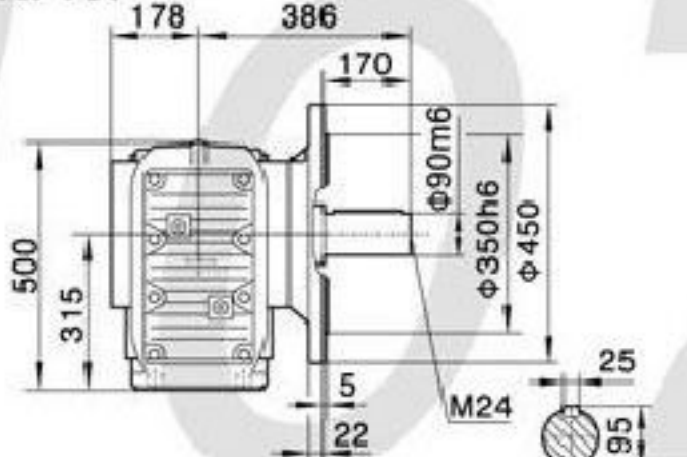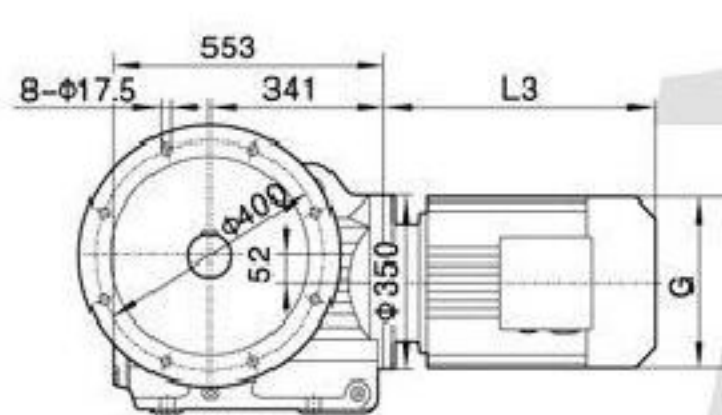


KAF107

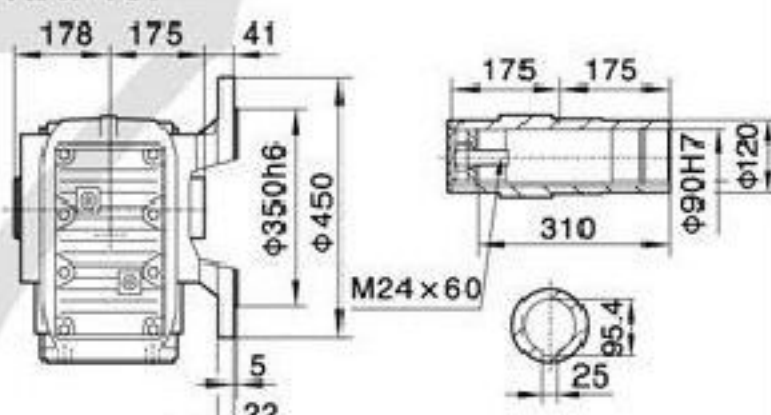


KAT107

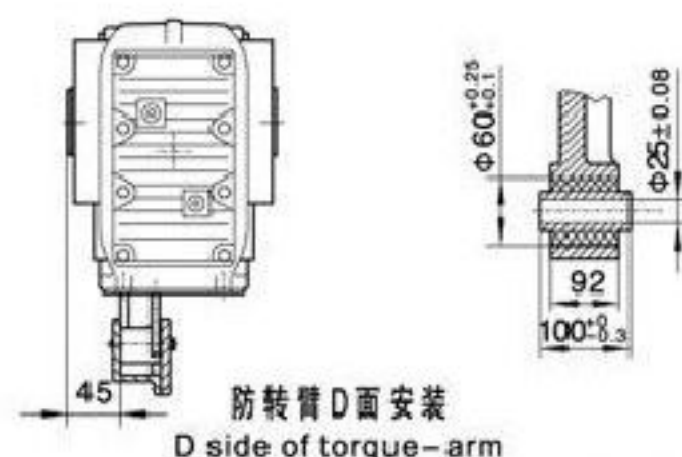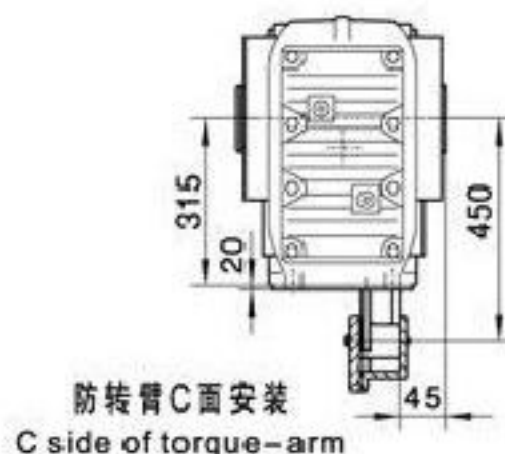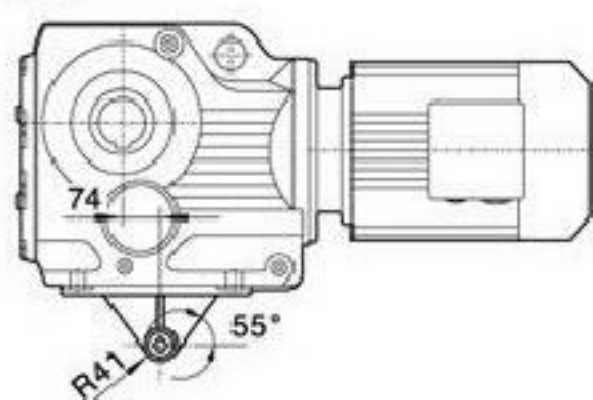


电机需方配或配特殊电机时
需加联接法兰

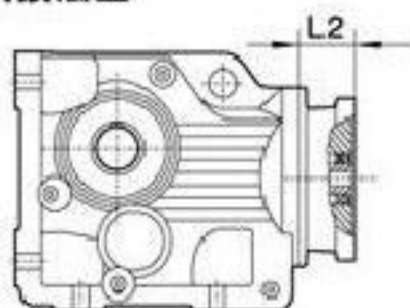

K..S107

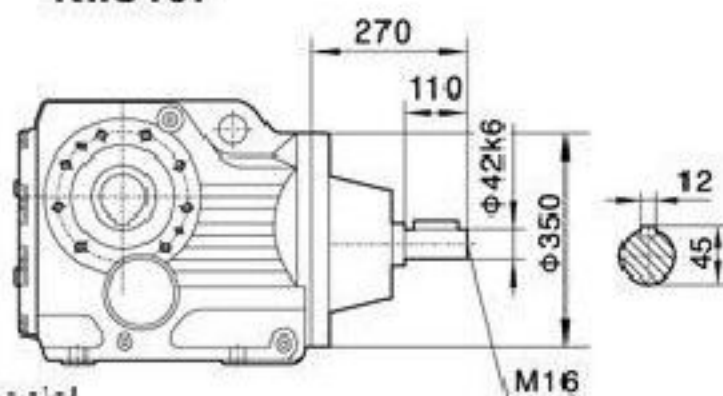

K..107R77

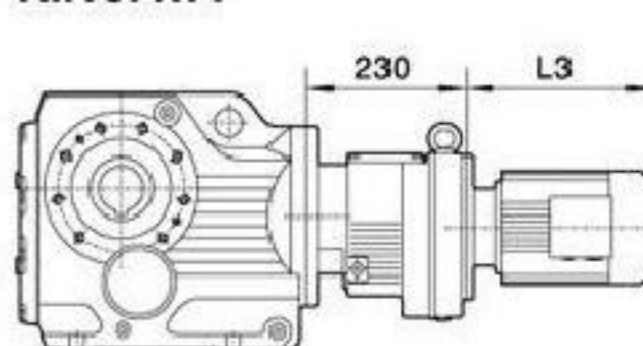

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.



Y2电机机座号 Motor size	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M
功率/4P Power/(kW)	3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45
L3	318	334	386	422	504	519	555	588	654	680	702
G	215	240	275	275	330	330	380	380	420	470	470
L2	101	101	101	101	126	126	126	126	132	132	132

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.



K127

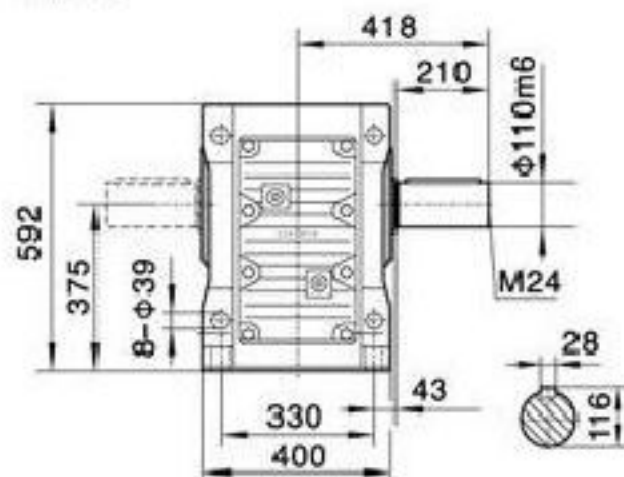


KA(KAB)127

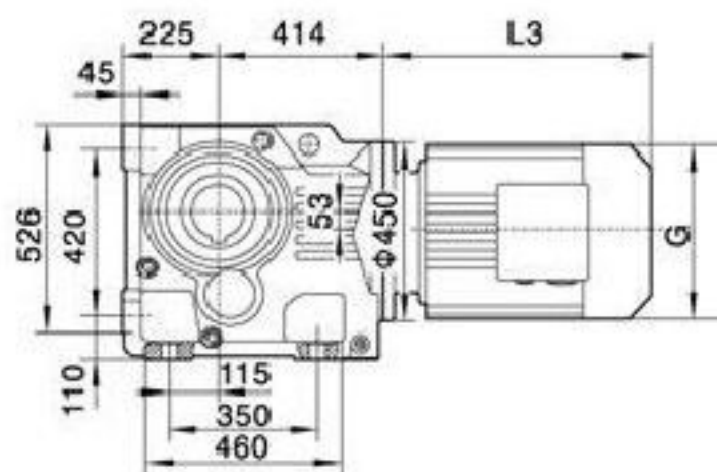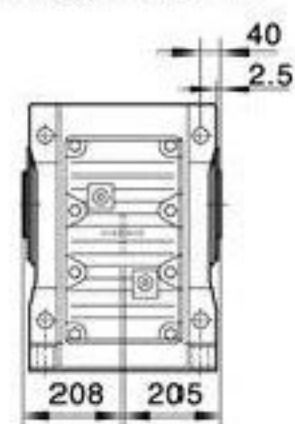


KAZ127

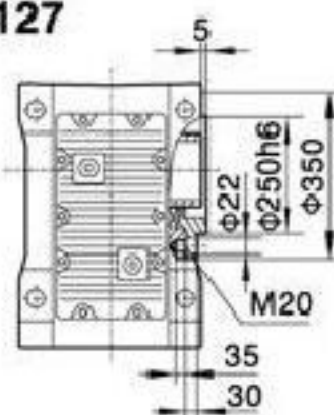


KA127/KAF127/KAZ127
空心轴/Hollow shaft

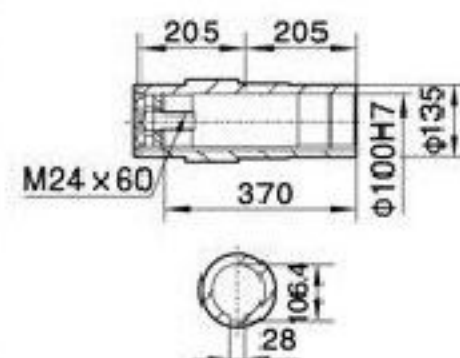


KF127

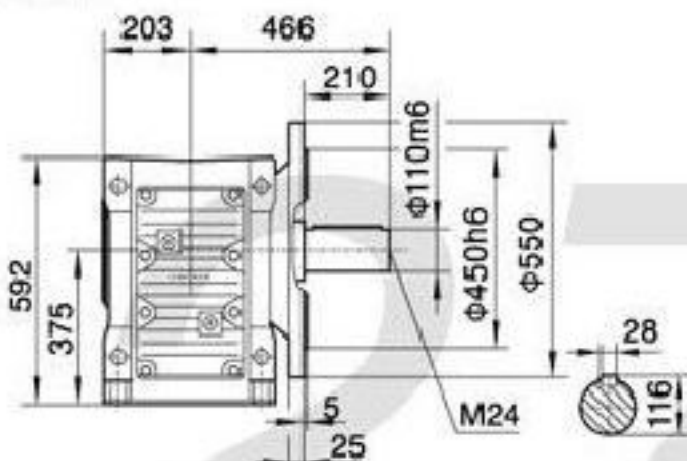


KAF127

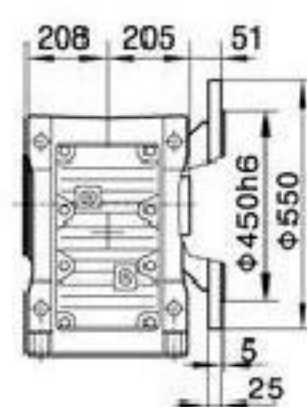


KAT127

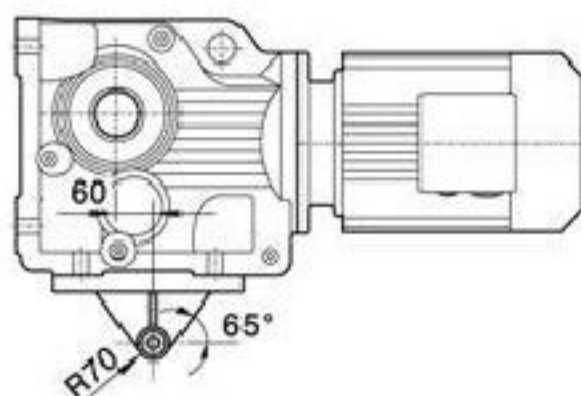


防转臂C面安装
C side of torque-arm

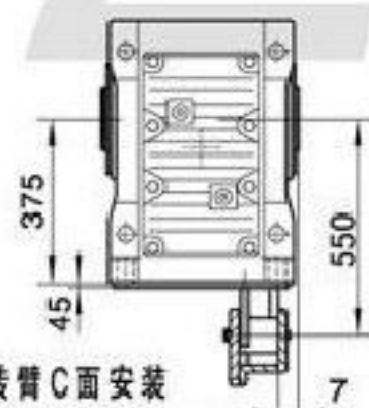


防转臂D面安装
D side of torque-arm

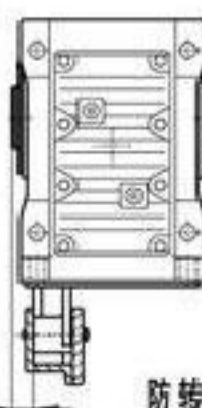


电机需方配或配特殊电机时
需加联接法兰

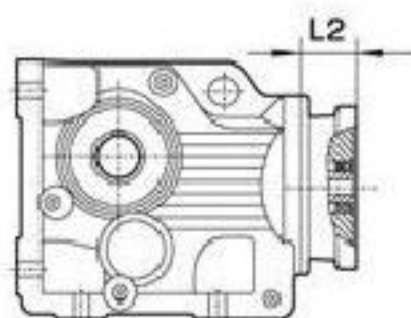

K..S127

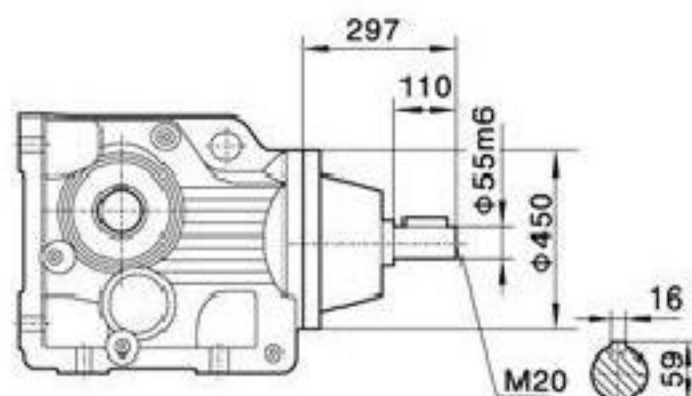

K..127R77(R87)

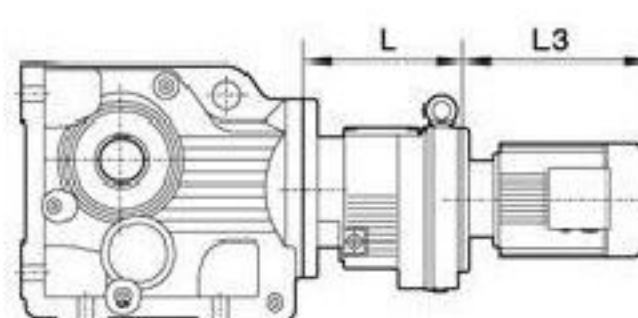


注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.


Y2电机机座号 Motor size	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
功率/4P Power/(kW)	7.5	11	15	18.5	22	30	37	45	55	75	90
L3	424	567	602	583	616	654	674	696	775	847	847
G	275	330	330	380	380	420	470	470	510	580	580
L2	132	132	132	132	132	132	143	143	174	174	174

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.






K167

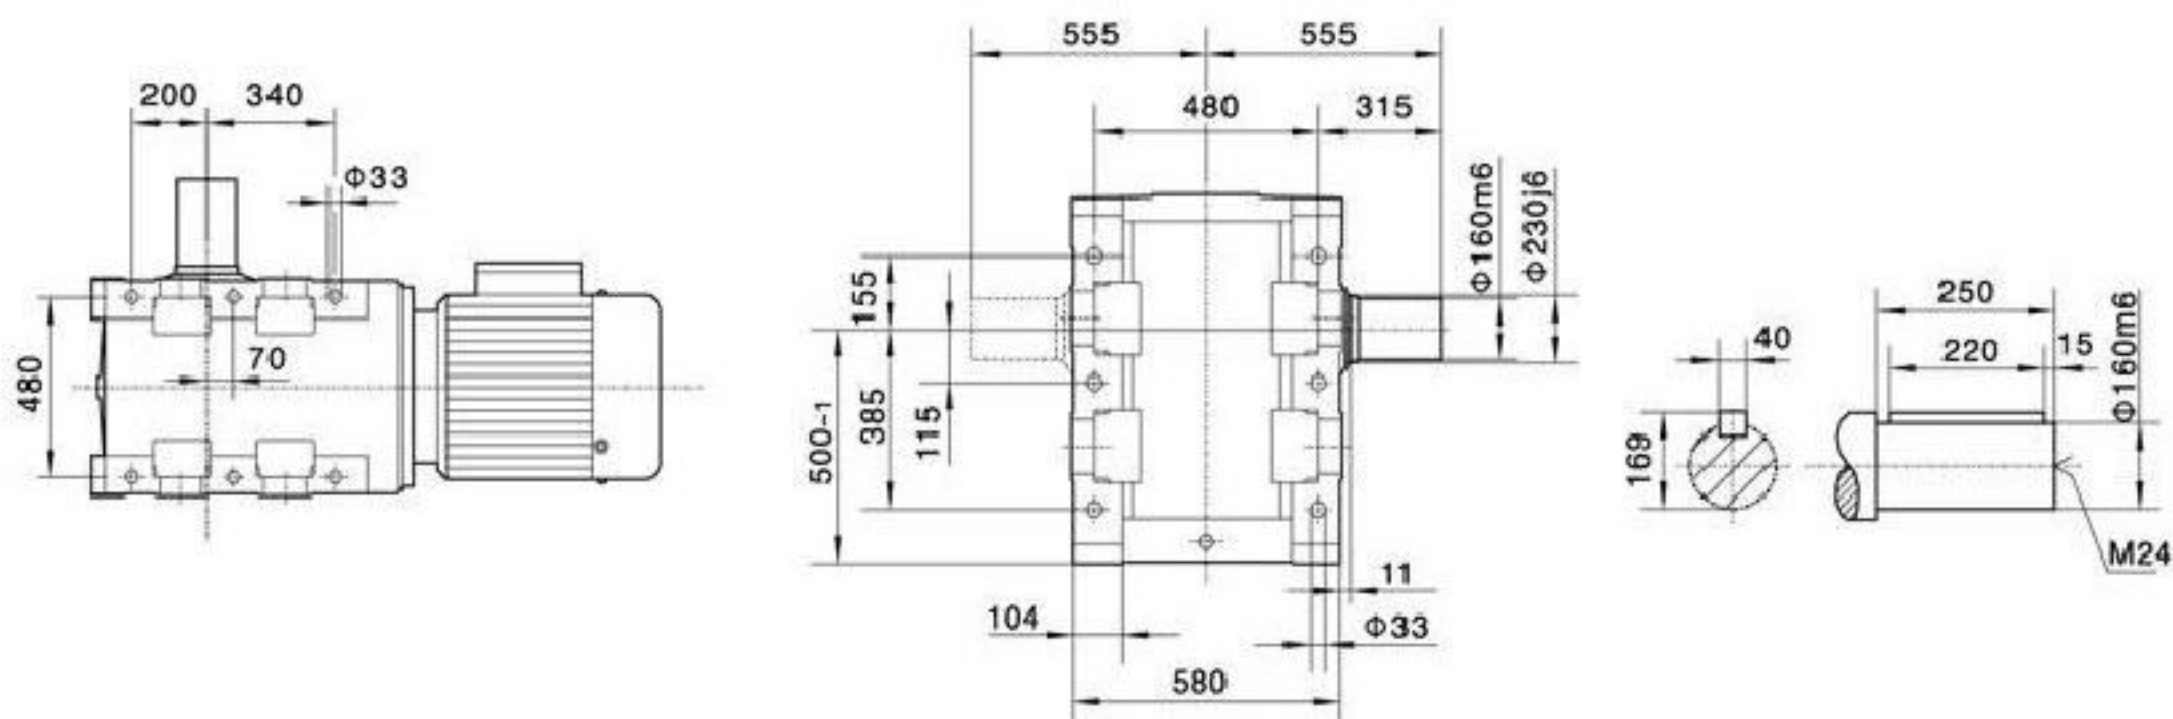


KA167

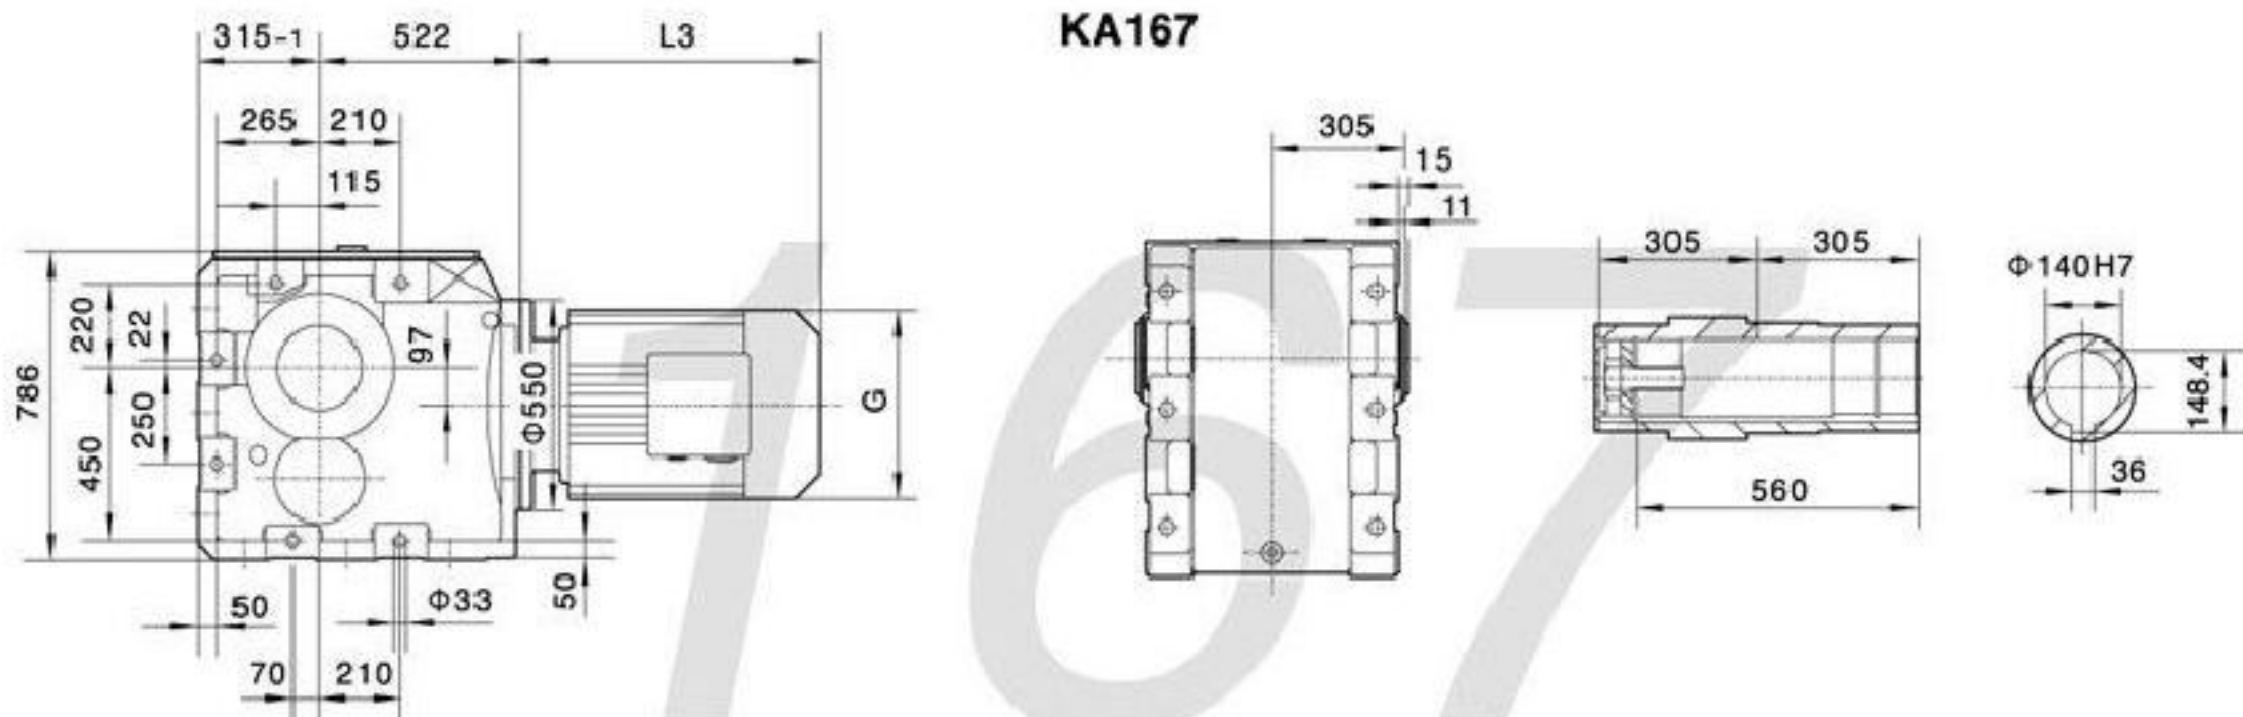


电机需方配或配特殊电机时
需加联接法兰

K..S167

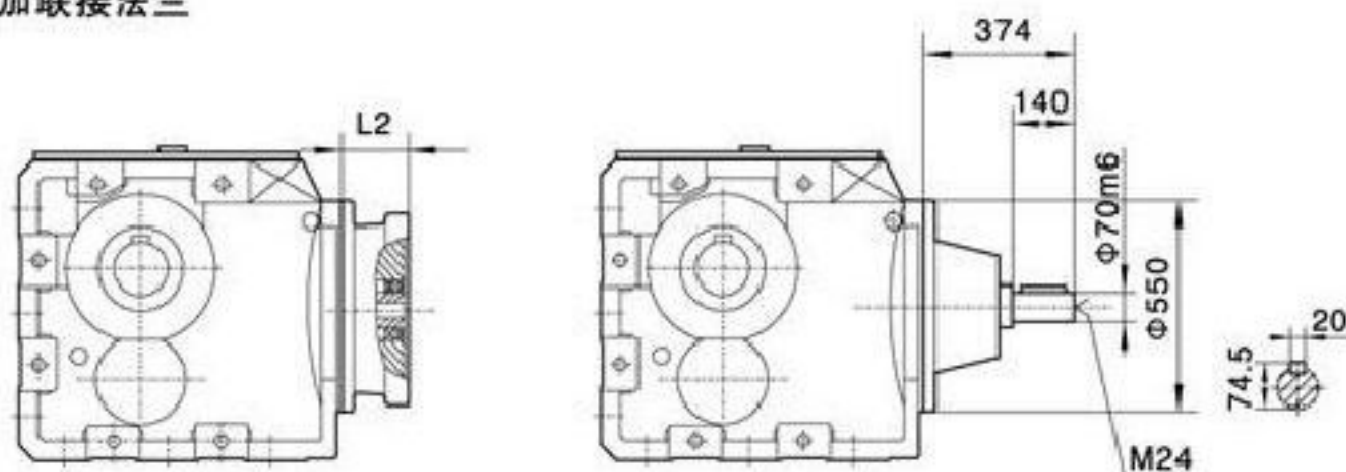

K..167R97(R107)

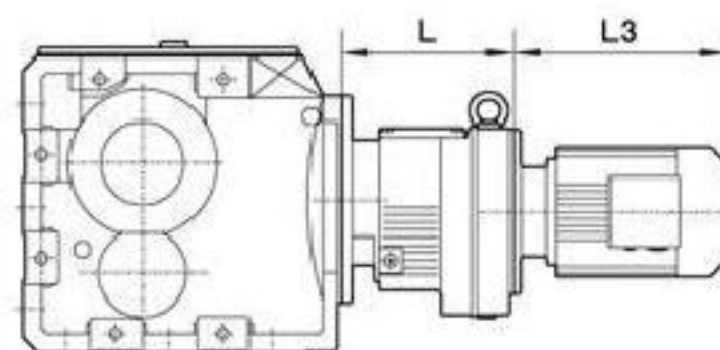

When equipping the user's motor or the special one, the flange is required to be connected.

注:其余尺寸见相对应结构形式


Note: For other values please refer to the opposited structure.

Y2电机机座号 Motor size 功率/4P Power/(kW)	160M	160L	180M	180L	200	225S	225M	250	280S	K..167R97		K..167R107	
										L	320	370	200
L3	567	602	635	666	642	669	691	770	828	879	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	143	143	143	143	143	143	143	143	143	143	145	145	145


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.



K187


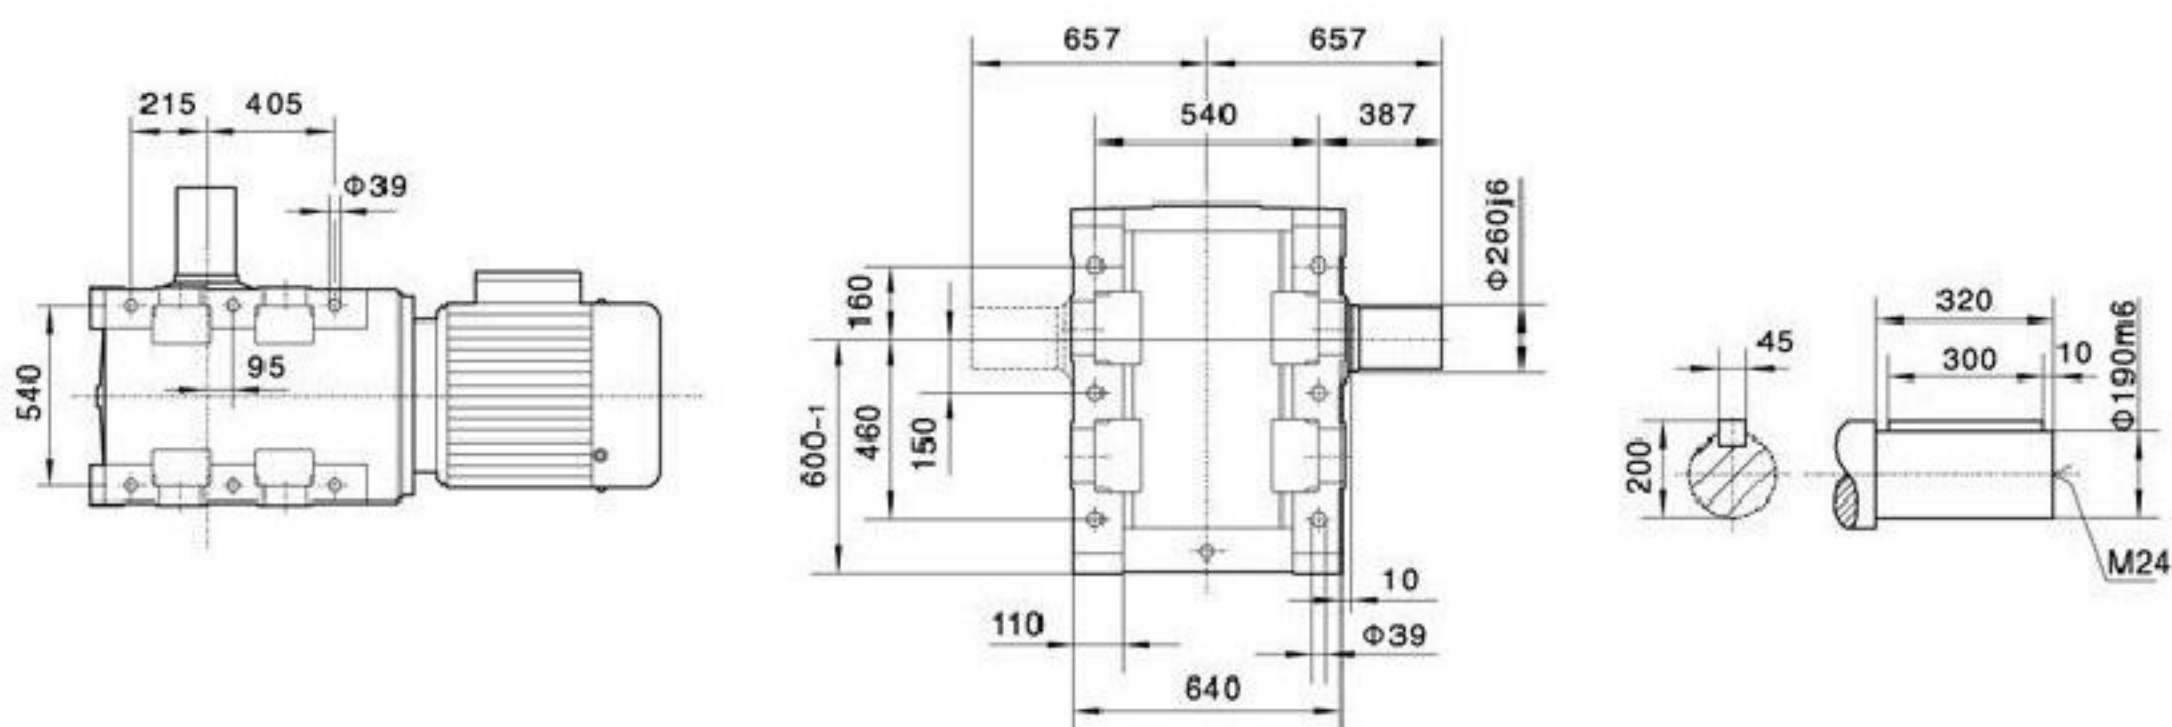


KA187

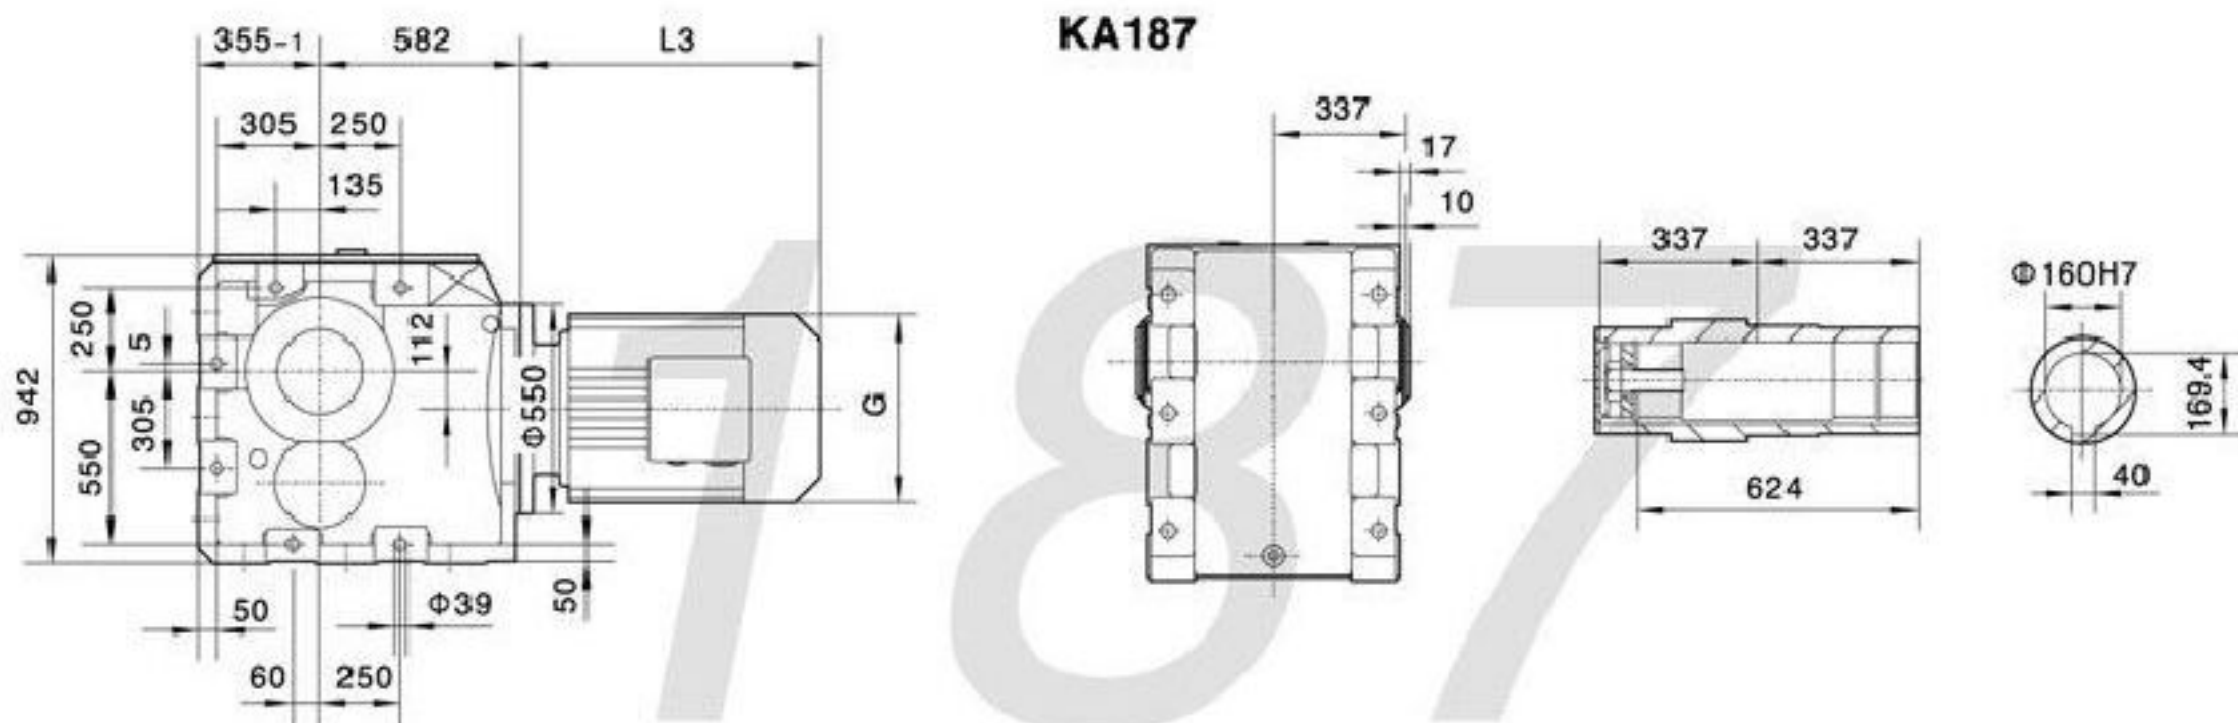


电机需方配或配特殊电机时
需加联接法兰

K..S187

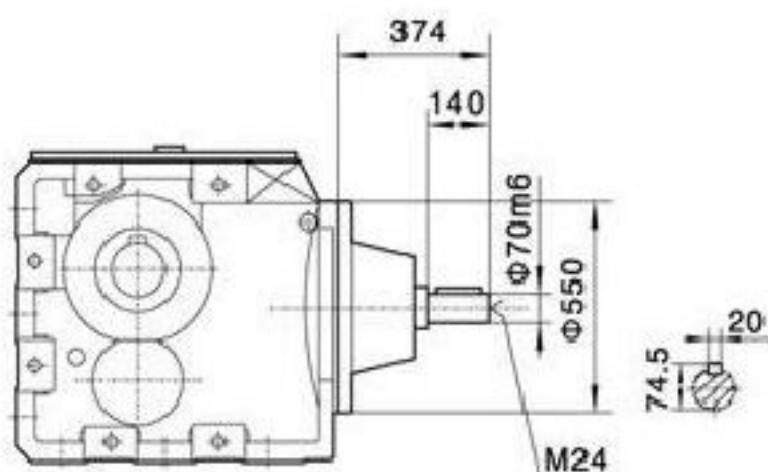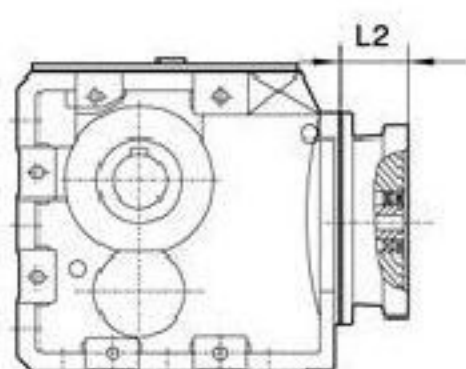

K..187R97(R107)

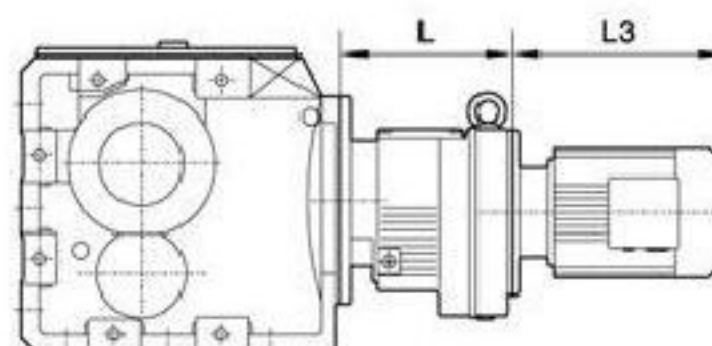

When equipping the user's motor or the special one, the flange is required to be connected.

注:其余尺寸见相对应结构形式

Note: For other values please refer to the opposite structure.

Y2电机机座号 Motor size 功率/4P Power/(kW)	K..187R97										K..187R107			
	L										370			
160M	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
160L	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
180M	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
180L	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
200	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
225S	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
225M	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
250	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
280S	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
280M	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
315S	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
315M	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
315L	11	15	18.5	22	30	37	45	55	75	90	110	132	160	200
L3	567	602	635	666	642	669	691	770	828	879	1100	1180	1270	
G	330	330	380	380	420	470	470	510	580	580	645	645	645	
L2	143	143	143	143	143	143	143	143	143	143	145	145	145	

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.